

Application

SCFR-R100 Resin and SCFR-H100 Hardener

■ SCFR-R100 Resin and SCFR-H100 Hardener are certified for use in connection to the sealing fittings type EYS, EYK and/or EYD, therefore the sealing compound and the sealing fittings can be sold only coupled and never separately. The sealing must be done properly to prevent passage of gas, vapours or flames through the pipe system.

SCFR-F100 Fiber

■ The Fiber is inserted into the sealing fittings to avoid that the resin runs into the pipe below.

Feature

The SCFR-R100 Resin and SCFR-H100 Hardener is an exclusive product of Alloy's. Its chemical composition has been improved after many sealing tests, carried out with the cooperation of ATEX accredited testing laboratory.

Technical Data

Hazardous Area	Gas	Dust
Zones	1 & 2	21 & 22
Conformity to Standards	EN IEC 60079-0, EN 60079-1, EN 60079-14 IEC 60079-0, IEC 60079-1, IEC 60079-14	
Ambeint Temperature	-20°C to +75°C	



SCFR-R100
Resin



SCFR-H100
Hardener




SCFR-F100
Fiber

Gram Required per Fitting

Fitting Cat. No.	Cavity volume (cm³)	Sealing compound weight (gram)	Sealing compound – mix ratio (by weight) 100:13		Fiber weight (gram)
			SCFR-R100 (Resin)	SCFR-H100 (Hardener)	
EYS 1	19.50	37.9 gram	33.5 gram	4.4 gram	1.0 gram
EYS 2	37.30	72.5 gram	64.2 gram	8.3 gram	2.0 gram
EYS 3	61.60	119.8 gram	106.0 gram	13.8 gram	3.2 gram
EYS 4	117.20	227.9 gram	201.7 gram	26.2 gram	6.1 gram
EYS 5	165.00	320.8 gram	283.9 gram	36.9 gram	8.6 gram
EYS 6	305.30	593.5 gram	525.2 gram	68.3 gram	16.0 gram
EYS 7	580.70	1,128.8 gram	999.0 gram	129.8 gram	30.4 gram
EYS 8	1015.00	1,973.2 gram	1,746.3 gram	226.9 gram	53.2 gram
EYS 9	1903.40	3,700.2 gram	3,274.7 gram	425.5 gram	99.7 gram
EYS 10	1910.00	3,713.0 gram	3,286.0 gram	427.0 gram	100.0 gram

Fitting Cat. No.	Cavity volume (cm³)	Sealing compound weight (gram)	Sealing compound – mix ratio (by weight) 100:13		Fiber weight (gram)
			SCFR-R100 (Resin)	SCFR-H100 (Hardener)	
EYK 1	25.30	49.2 gram	43.5 gram	5.7 gram	2.0 gram
EYK 2	35.90	69.8 gram	61.8 gram	8.0 gram	4.0 gram
EYK 3	43.20	84.0 gram	74.3 gram	9.7 gram	6.4 gram
EYK 4	115.90	318.2 gram	281.6 gram	41.2 gram	12.2 gram
EYK 5	163.70	358.6 gram	317.4 gram	36.6 gram	17.2 gram
EYK 6	255.20	496.1 gram	439.0 gram	57.1 gram	32.0 gram
EYK 7	394.10	766.1 gram	678.0 gram	88.1 gram	60.8 gram
EYK 8	697.70	1,356.4 gram	1,200.4 gram	156.0 gram	106.4 gram
EYK 9	1447.80	2,814.5 gram	2,490.8 gram	323.7 gram	199.4 gram
EYK 10	1627.60	3,164.0 gram	2,800.1 gram	363.9 gram	200.0 gram

Fitting Cat. No.	Cavity volume (cm³)	Sealing compound weight (gram)	Sealing compound – mix ratio (by weight) 100:13		Fiber weight (gram)
			SCFR-R100 (Resin)	SCFR-H100 (Hardener)	
EYD 1	21.45	34.7 gram	30.7 gram	4.0 gram	1.0 gram
EYD 2	41.03	66.5 gram	58.9 gram	7.6 gram	2.0 gram
EYD 3	67.76	109.8 gram	97.2 gram	12.6 gram	3.2 gram

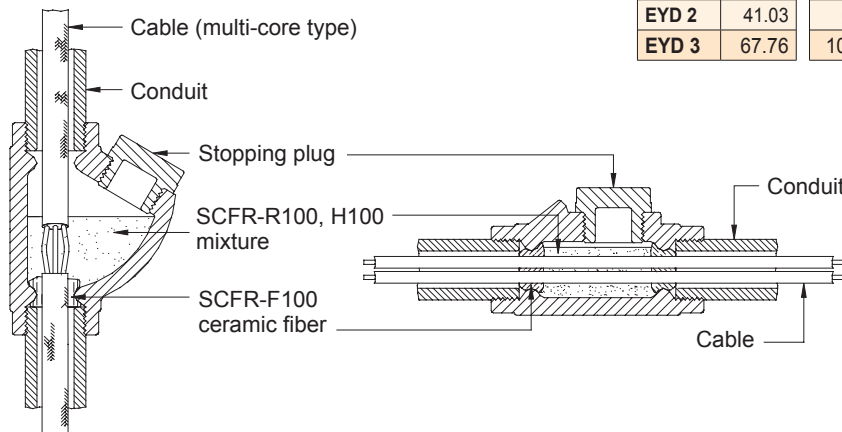

Vertical Seal — EYS or EYD Series

Horizontal Seal — EYK Series