

Clamp and Back clamp




CL clamp



CLB back clamp

Ordering Requirements and Dimensions

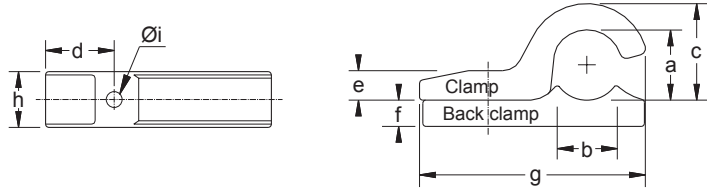

Application

CL clamps and CLB back clamps are used for fixing rigid steel conduit (RSC), intermediate metal conduit (IMC), or cables in dry, wet, or corrosive locations.

- CL clamps are used for fixing conduit or cables running on the surface.
- CLB back clamps are used with CL clamps to provide space between the conduit and the surface.

Specification

Body material : Marine grade copper-free aluminium alloy with polyester powder coated, RAL 7032 (Grey)


Standard sizes : 1/2 to 4 inches conduit size

Cat. No.		Conduit size (inch)	Dimensions in mm								
Clamp	Back clamp		a	b	c	d	e	f	g	h	Øi
CL 1	CLB 1	1/2"	20.0	19.0	30.0	22.0	10.0	8.0	70.0	16.0	6.0
CL 2	CLB 2	3/4"	25.0	23.0	33.0	22.0	11.0	8.0	77.0	16.0	6.0
CL 3	CLB 3	1"	31.0	28.0	39.0	24.0	12.0	10.0	85.0	16.0	7.0
CL 4	CLB 4	1-1/4"	40.0	35.0	47.0	28.0	14.0	10.0	98.0	25.0	8.0
CL 5	CLB 5	1-1/2"	44.0	38.0	54.0	28.0	14.0	10.0	105.0	25.0	8.0
CL 6	CLB 6	2"	58.0	47.0	68.0	35.0	14.0	12.0	127.0	29.0	8.0
CL 7	CLB 7	2-1/2"	73.0	52.0	86.0	35.0	16.0	12.0	145.0	31.0	8.0
CL 8	CLB 8	3"	87.0	60.0	102.0	35.0	16.0	13.0	160.0	35.0	8.0
CL 9	CLB 9	3-1/2"	97.0	66.0	113.0	35.0	16.0	13.0	182.0	35.0	8.0
CL 10	CLB 10	4"	105.0	70.0	120.0	35.0	21.0	13.0	188.0	35.0	8.0

Bracket clamp



Ordering Requirements and Dimensions

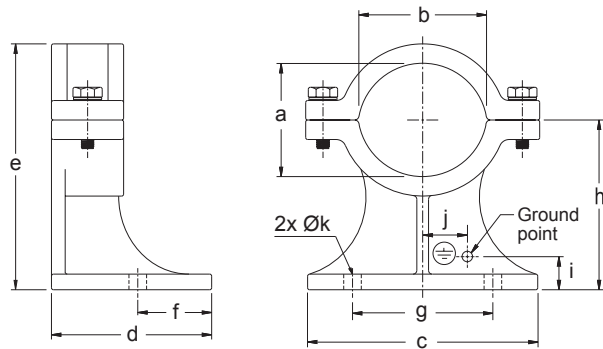

Application

BC bracket clamps are used for supporting and fixing rigid steel conduit (RSC), intermediate metal conduit (IMC), or cables in dry, wet, or corrosive locations.

Specification

Body material : Marine grade copper-free aluminium alloy with polyester powder coated, RAL 7032 (Grey)

Screw and washer : Stainless steel

Cat. No.	Conduit size (inch)	Dimensions in mm										
		a	b	c	d	e	f	g	h	i	j	Øk
BC 1	1/2"	18.0	24.0	72.0	60.0	61.0	30.0	45.0	45.0	14.0	14.0	12.0
BC 2	3/4"	23.0	30.0	83.0	60.0	76.0	30.0	50.0	57.0	14.0	14.0	12.0
BC 3	1"	30.0	36.0	83.0	60.0	80.0	30.0	50.0	57.0	14.0	14.0	12.0
BC 4	1-1/4"	38.0	46.0	111.0	60.0	84.0	30.0	65.0	57.0	14.0	14.0	12.0
BC 5	1-1/2"	44.0	52.0	111.0	60.0	87.0	30.0	65.0	57.0	14.0	14.0	12.0
BC 6	2"	56.0	63.0	145.0	72.0	124.0	36.0	80.0	87.0	17.0	17.0	14.0
BC 7	2-1/2"	69.0	76.0	145.0	72.0	131.0	36.0	80.0	87.0	17.0	17.0	14.0
BC 8	3"	84.0	92.0	187.0	90.0	167.0	45.0	100.0	115.0	20.0	20.0	14.0
BC 9	3-1/2"	96.0	106.0	187.0	90.0	173.0	45.0	100.0	115.0	20.0	20.0	14.0
BC 10	4"	109.0	120.0	187.0	90.0	179.0	45.0	100.0	115.0	20.0	20.0	14.0