



HOTEL LOCK SYSTEM

คุณสมบัติพิเศษ GL 918 Maldives


- ระบบกลอนประตูอิเล็กทรอนิกส์ที่ใช้บัตรทาบเพื่อเปิด-ปิดประตู
- ตัวเครื่องทำจาก Stainless หล่อชิ้นเดียวทนทาน แข็งแรง มาตราฐาน 304
- มีไฟและเสียงโชว์สถานะที่หน้าจอเวลาอ่านค่า RFID Mifare Card 13.56 MHz.
- ระบบการเตือนเมื่อเครื่องอยู่ในสถานะ Low Battery สามารถเปลี่ยนได้ง่ายและใช้พลังงานจากถ่าน AA 4 ก้อน
- บานประตูต้องมีความหนา 2.8-4.5 ซม.สามารถเปิดด้านในและด้านนอกได้
- ระบบเตือนเมื่อปิดประตูไม่สนิทด้วยสัญญาณเสียง
- เหมาะสำหรับประตูบานผลักที่เป็นอลูมิเนียมหรือไม้
- กลอนระบบล็อค 2 ชั้นแบบ American style (Double Lock) แน่นหนา เหตุฉุกเฉินหรือแบตเตอร์รี่หมดสามารถใช้กุญแจได้

FEATURES: GL 918 MALDIVES

- Long style Panel and suitable for deluxe hotel Stainless stell materials plus transparent finish
- 1,200 latest lock events saved Built-in real-time clock and flash memory Built-in buzzer and self-detect light
- Support contactless MIFARE 13.56 MHz Powered by 4 x AA battery Free engage outside handle
- Eazy release-inside handle makes deadbolt and latch retracted together Deadbolt override by card option available
- Low power alarm,keep last 3,000 time unlocking chance Mechanical cylinder and key override





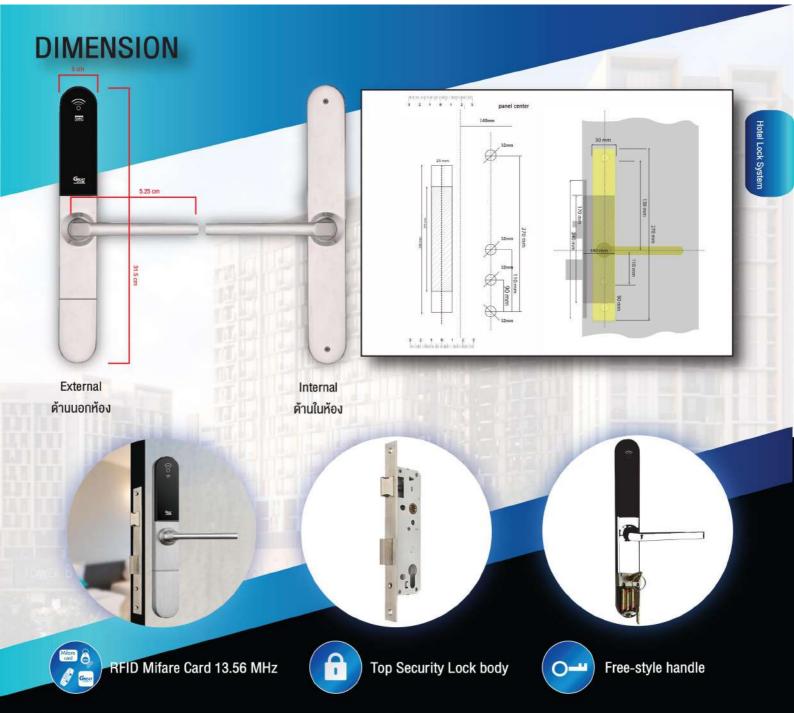

Specification: GL-918 Maldives

Power: LR6 (AA)battery x 4pcs Low power alarm voltage:4.8V

Communication: 13.56MHz RFID (with keycard)/infrared

Card support: MIFARE S50 plus S70 Working Distance: 45mm Max Working Tempreature: 0-60 °C Working Humidity: 15~85%RH

Static current: < 30uA Working current: < 150mA

Memory:1200TransactionsincludeTime/Date/Card D/Card

type/RoomID

Software: GREAT LOCK Hotel lock system

Gross Weight: 3.3KG

Content: Front/Back panel,mortise,cylinder,keyx2

USEAGE:

- Guest card: Reception complete peogram Guest card by give a begin and expiry date for a room(rooms),
 Guest access room by read this card on lock.
- Master card: Hold by owner to access to all rooms of hotels.
- Floor card: Hold by clean staff to enter the rooms in one floor.
- Building card: Hold by manager to enter the rooms in one building.
- Passage card: Once this card been read on one door, this door could be access by without reading keycard.
- Emergency card: Enter the all rooms.