

Control Station and Control Panel: Control Station, WCT2 series

Weatherproof

IP65



Application

WCT2 control stations are used for local or remote control of motors and machines. They are suitable for use in industrial plants, general-purpose areas, and wet locations.

Specification

Body, cover : Marine grade copper-free aluminium alloy with polyester powder coated, RAL 7032 (grey)
Sealing gasket : Silicone
Bolts, nuts : Stainless steel, SS 304

Electrical Rating

Switch rating ; AC 15 (inductive load) 3 A/220 V
DC 12 (resistive load) 1.1 A/220 V
Rated insulation voltage 600 V
Rated continuous current 10 A
LED lamp rating ; Transformer input 110, 220, 230 VAC
Direct 6-24 V DC
Incan. lamp rating ; Transformer input 380 V AC

Technical Data

Protection	Weatherproof
Ambient Temperature	-20°C to +50°C
Index of Protection	IP65
Connection Terminals	Terminal block for 1-2.5 mm ² cable
Entry Threads	1/2" to 1" NPT (M20x1.5 to M32x1.5)
Mounting	Wall type

Catalogue Number Logic

Series	Number of unit	Entry threads	Number of terminals
1	1 unit	Position	Thread size
2	2 units	T Dead-end/ Top	N1 1/2" NPT
3	3 units	B Dead-end/ Bottom	N2 3/4" NPT
4	4 units	C Through-feed	N3 1" NPT
5	5 units	M1	M20x1.5
6	6 units	M2	M25x1.5
		M3	M32x1.5
			2T 2-Poles
			4T 4-Poles
			6T 6-Poles
			8T 8-Poles


Ordering Requirements

Number of unit	Cat. No.	Approx. weight (kg)
1 unit	WCT2-1-□□□-□T	1.45
2 units	WCT2-2-□□□-□T	2.15
3 units	WCT2-3-□□□-□T	3.05
4 units	WCT2-4-□□□-□T	3.65
5 units	WCT2-5-□□□-□T	3.85
6 units	WCT2-6-□□□-□T	3.98


Optional : Padlockable by pin for push buttons and/or selector switches

Dimensions (in mm)

1, 2 units

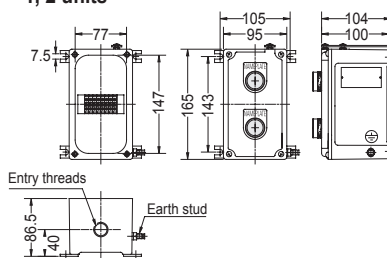

3, 4 units

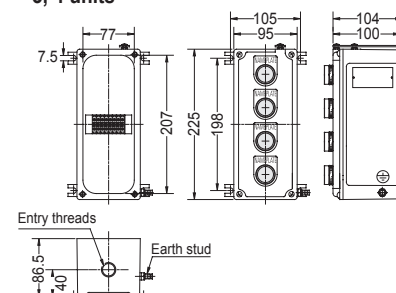

5, 6 units

