





# DVR 4000 SERIES

5.0MPixel Lite Video Recorder/ H.265 Compression

## DVR 5IN1 SYSTEM

AHD /TVI /CVI /CVBS /IPC SYSTEM SUPPORT

# H.265

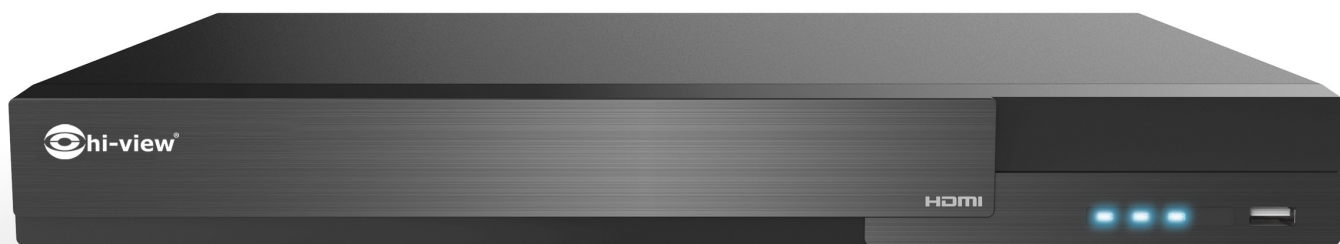

# 5MP Lite

Video Recorder





# DVR 4000 SERIES

5.0MPixel Lite Video Recorder/ H.265 Compression

## Specification



## Feature

- \* Supports 16 CH TVI / AHD /CVI 5MP / 4MP / 1080P 720P / WD1 video input
- \* Supports 8 CH 5MP / 4MP / 3MP / 1080P / 960P 720P IP video input
- \* 8CH analog video input can be switched to 8CH IP video input
- \* Standard H.265 high profile compression format to get high-quality video at much lower bit rate
- \* Intuitive and user-friendly Graphics User Interface (GUI), window style operation by mouse
- \* Multi-mode recording: manual / timed / motion / AI recording
- \* Playback : 16 CH simultaneously playback
- \* Search: time slice, time, event, tag and smart search
- \* Express and flexible backup via USB, network and so on
- \* Pentaplex: preview, record, playback, backup and remote access
- \* DHCP, DDNS, PPPoE network protocol
- \* Remote control via Web Client or CMS : preview, playback, backup, PTZ and configuration
- \* Support remote network transmission and remote surveillance with mobile device Authorization management, log review and device status review
- \* 1080P output, true high resolution display
- \* Supports PTZ preset and auto cruise, up to 255 presets and 8 cruises
- \* Supports NAT function and QRCode scanning by mobile phones
- \* Powerful mobile surveillance by smart phones with iOS and Andriod OS

Model	HA-45516H2-V2
Analog Video Input	BNC x 16 / BNC interface (1.0Vp-p; 75Ω) TVI/AHD/CVI: 5MP@20fps; 4MP/1080P/720P/WD1@30fps (live)
<b>Video</b>	
IP Video Input	8CH (up to 16CH) / Up to 5MP@30fps
Total Input	24CH
Output	HDMIx1 : 1920x1080 / 1280x1024 / 1024x768 VGAx1 : 1920x1080 / 1280x1024 / 1024x768 BNCx1 : CVBS (used as the main or spot output)
Compression	H.264 / H.265
Multi-screen Display	1 / 4 / 6 / 8 / 9 / 13 / 16 / 25
<b>Audio</b>	
Input	RCaX8
Output	RCaX1 (linear, 600Ω)
Two-way audio	Take up channel one audio input
Compression	G.711(U/A)
<b>Record</b>	
Resolution	5MP Lite/4MP Lite/1080P/1080P Lite/720P/WD1
Frame Rate	Analog Channel: 5MP Lite@10fps (PAL / NTSC) 4MP Lite/1080P@12fps(PAL) / 15fps (NTSC) 1080P Lite/720P/WD1/D1@25fps (PAL) / 30fps (NTSC) IP Channel: 25fps (PAL) / 30fps (NTSC)
Bit Rate	32Kbps ~ 5Mbps
Mode	Manual, timer, motion, smart event
<b>Playback</b>	
Playback	16CH
Search	Time slice / time / event / tag search
Smart Search	Highlight colors to display the camera record in a certain period of time, different colors refer to different record events
Function	Play, pause, FF, FB, digital zoom, etc.
Mode	Manual, motion, exception, smart event
Input	16CH
Output	4CH
<b>Network</b>	
Interface	RJ 45 1000Mbpsx1
Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, HTTP, HTTPS, NTP, SMTP
Incoming Bandwidth	32Mbps
Outgoing Bandwidth	96Mbps
Client Connection	Max. 10 users access
MobileDevice (OS)	iOS, Andriod
<b>Storage</b>	
HDD	SATAx2, up to 10TB per HDD; E-SATAx1
Local Backup	U disk, USB mobile HDD
Network Backup	Yes
<b>Port</b>	
RS 485	Yes (half-duplex), connect to PTZ or keyboard
USB	USB 2.0x1; USB3.0x1
Remote Controller	Optional
<b>Others</b>	
Power Supply	DC12V/4A
Consumption	15W (without HDD)
Dimensions(mm)	380 x 268 x 45 (W x D x H)
Working Environment	-10~50C, 10%~90% (humidity)

# H.265

**5MP Lite**  
Video Recorder

