




Features:

- * Transmission Range: 3KM
- * Transmission Rate: 1000Mbps
- * Power Input: DC 12V0.4A/ PoE
- * Adapter Power Supply
- * Aluminium Alloy Abrasive Material
- * Convenient

Dimension (mm)

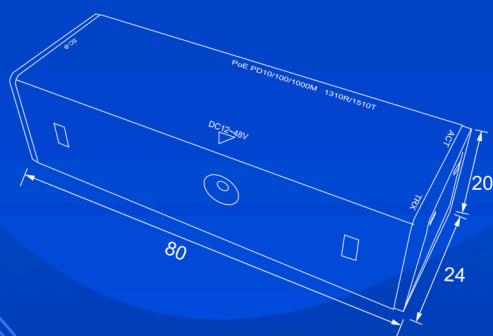

Model	HG-FCS3AB-E (IN)
Protocol Standard	IEEE802.3z/ab
Network Interface	RJ45 10/100/1000Mbps Self-Adaption
	Transmission Distance: 100m
Fiber Interface	Single Mode SC
	Optical Fiber Type: Single Mode 9/125μm
	1310T/1550R (A)
	1550T/1310R (B)
	Transmission Rate: 1000Mbps
Performance & Specification	Transmission Distance: ≤3KM
	Forwarding Mode: Store Forward
	Transfer Mode: Full Duplex
	Full Duplex Automatic Connection
Power	Network Latency: ≤150μs
	Power input: DC 5-12V
	PoE 48V
Physical Specifications	DC Socket: 5525mm
	Size: 80*24*20mm
Working Environment	Weight: 0.09KG
	Operating Temperature: -30°C~75°C
	Storage Temperature: -10°C~55°C
	Operating Humidity: 10%~90%
	Non-condensing
Certification	Storage Humidity: 5%~90%
	Non-condensing
	CE Mark
	FCC Part15
	Class B
	RoHS 2.0