

# LED Splicing Video Wall

## HG-TVW55-35

- Ultra-narrow 3.5mm seam
- Wide 178°viewing angles
- 3D noise reduction
- 7×24 working, continuous stable operation



## Product Features

- True color display and perfect color reproduction
- Support floor-standing, wall-mounted installations
- Industrial-grade panel, highly reliable integrated structure design
- Professional thermal design to extend device lifespan, MTBF 60,000h

## Product Display






## Installation Diagram



## Specifications

Model	HG-TVW55-35
Panel	
Backlight	Led
Diagonal Size	55" (16:9)
Physical Seam	3.5MM
Pixel Pitch	0.63x0.63 (HxV) (mm)
Max Resolution	1920x1080
Brightness	500nit
Contrast (typ)/(min)	1350:1
Response Time	≤8ms
Color	1.07B(10bit)
Color Saturation(x% NTSC)	72%
Viewing Angle	H 178°, V 178°
Refresh Rate	60Hz
MTBF	60,000h
Multi-Language	Simplified Chinese, English,(Support language customization)
Interface	
Input and Output	DVI*1, HDMI*1, RS232(RJ45)-IN*1, USB*1, RS232-OUT*2
General	
Power Supply	AC100-240V(±10%),50/60Hz
Consumption	<180W(On); <0.5W (Standby)
Working Temperature	0°C~50°C (32°F~122°F)
Working Humidity	20%~85% (No Condensation)
Storage Temperature	-10°C~60°C (14°F~140°F)
Storage Humidity	20%~85% (No Condensation)
Dimension(W*H*D)	1214x130.5x685.5mm (Without Bracket)
Package(W*H*D)	1325x340x785mm, 2Pcs/CTN
Gross Weight	20KG/Pcs
Accessory	
Standard	Remote Control, AC Cable, User Manual, HDMI Cable
Optional	Hanging Bracket

Dimension (mm)

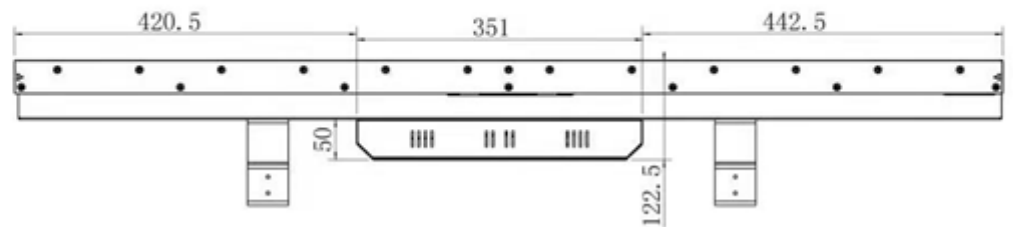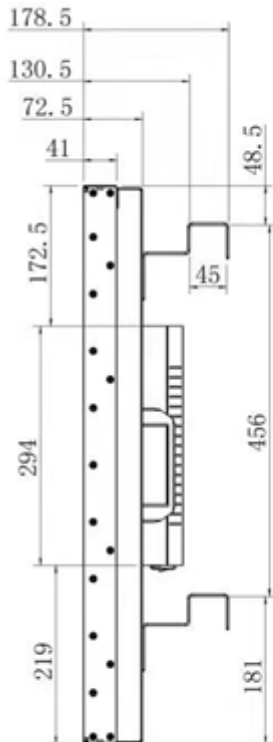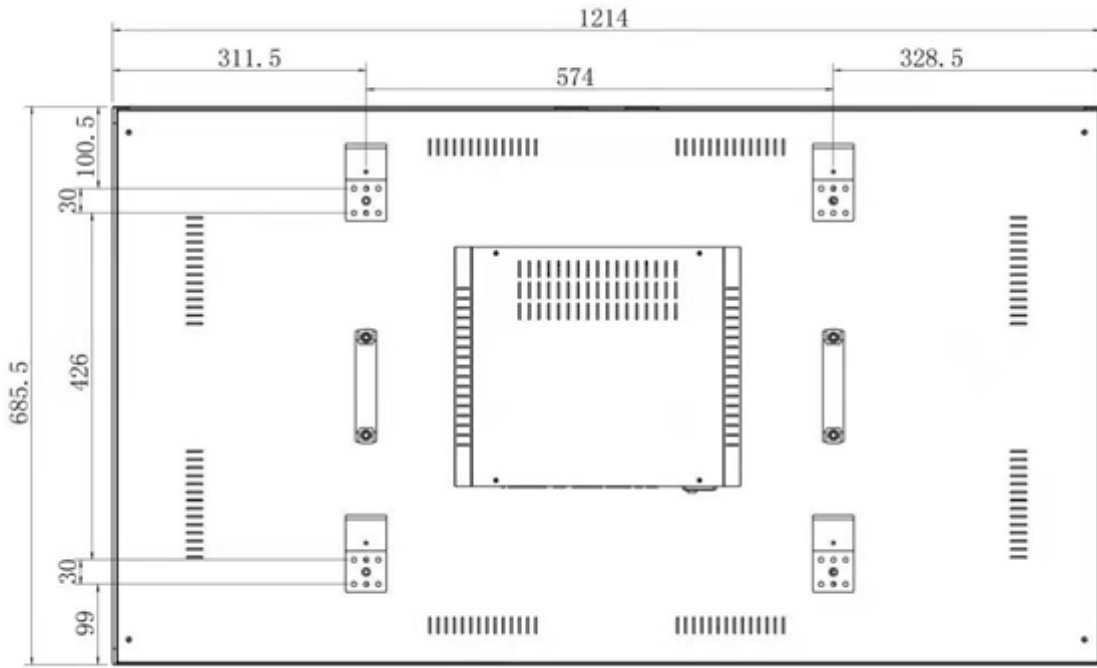

Mistake:±1mm