



## HS-MSW6 2P4BT-AI

### Product Features


- \* Total 65W Power Supply
- \* 4 ports PoE
- \* 2 ports Uplink
- \* AI Watchdog Function
- \* 6KV Lightning & 8KV ESD Protection
- \* Support bt 60W High Power
- \* AC cable intergrated with main body, compact in size

### Ports Description



- 1 100Mbps PoE Ports
- 2 bt 60W Power Ports
- 3 100Mbps Uplink Ports

## Model: HS-MSW6 2P4BT-AI Specifications

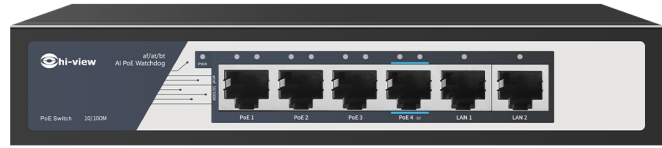

Ports	PoE (1~3):10/100Mbps PoE ports (RJ45) PoE (4):10/100Mbps PoE port (RJ45),Support bt 60W High Power
	LAN (1~2):10/100Mbps uplink ports (RJ45)
Transmission Rate	200Mbps Full Duplex; 10 or 100Mbps Half Duplex
Transmission Distance	130m
Performance Specification	Bandwidth:1.2Gbps
	Network Latency (10 to 100Mbps): $\leq 16\mu s$ (use the 64byte package size)
	MAC address table: 2K
	The Frame Filter & Transmission Rate: 14800pps the most for 10M port, 148800pps the most for 100M port
Networking Standard	IEEE 802.3i 10BASE-T, IEEE 802.3u 100BASE-TX IEEE 802.3x Flow Control, IEEE 802.3af/at/bt Power over Ethernet
Power Support	Power Input: AC 90~240V Total $\leq 65W$ , AI Watchdog: Port 1~4 Power Output: PoE1~3 Port:1/2(+52V),3/6(GND) $\leq 30W$ PoE 4 Port:1245(+53V),3678(GND) Compatible1/2(+52V),3/6(GND) $\leq 60W$
Protection Level	Lightning Protection:6KV, ESD Protection:8KV
Physical Specifications	Size(L*W*H): 190mm*80mm*36mm, Weight: 0.5KG
Working Environment	Operating Temperature: -30°C~60°C Storage Temperature: -40°C~70°C Operating Humidity: 10%~90% Non-condensing Storage Humidity: 5%~90% Non-condensing