



มินิสปัดโดม |
เชื่อมต่อWi-Fiไร้สาย

ตรวจจับ
ติดตามบุคคล

2 ล้านพิกเซล
2เลนส์ 2มุมมอง
2ย่านความถี่ Wi-Fi
2.4GHz & 5GHz



2เลนส์-2มุมมอง



2ย่านความถี่ Wi-Fi



พูดคุยได้สองทาง



ควบคุมการหมุน/ ก้มเงย
หมุน:308° / ก้มเงย 90°




มีโหมดภาพสี
โหมดขาวดำ



บันทึกบน Cloud (option)
บันทึกบน TF Card

HW-33MPT40W-D

2MP Dual Lens & Dual Band WiFi

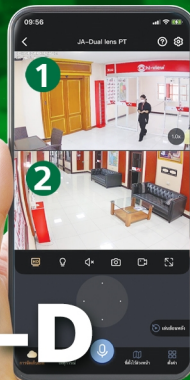

Smart Pan-Tilt

90°
308°

Product Features

- * Dual 2MP, enjoy definition picture quality
- * Supports 2.4GHz and 5.8 GHz frequencies, and is compatible with WPA and WPA2 encryption
- * 2inch PT camera body, made of engineering plastic material, outdoor rainproof IP65
- * Horizontal viewing angle of 308 degrees, vertical viewing angle of 90 degrees, supports 6 preset positions
- * Local TF card video recording storage, ensuring the safe storage of video data
- * Supports MIC and speaker, two-way audio
- * Supports Bluetooth network configuration; easily connect the camera to the network by scanning a QR code, making operation simple and convenient.
- * Infrared and white light dual light design, supporting adjustable black-and-white and full- color modes
- * Active defense system: detects intruders entering the security zone, features motion tracking, and sends real- time alert notifications. The device also includes sound and light alarm functions.
- * Area motion detection with real-time alert notifications Smart human detection filters out false alarms, providing precise protection for your safety, along with sound and light a larm functions on the device
- * Support remote monitoring of mobile phones and PC clients, and view the scene anytime, anywhere.
- * IP66,4000V lightning protection, anti-surge, anti-surge.



2 เลนส์
มุมมอง



Wi-Fi
2.4GHz & 5GHz

Smart Pan-Tilt

90° 308°



Application
Hiviewwifi
App Store Google play

Specifications

Model

HW-33MPT40W-D

Pixel	2MP+2MP
Sensor	1/3" CMOS Sensor*2
Lens Bullet	4mm fixed lens + PT 4mm fixed lens
Resolution	Main stream: 1920*2160 Sub stream: 800*896
Image compression format	H.264 / H.265 Support dual stream
noise reduction	Support 3 Dnoise reduction
Audio format	AAC、G711
Storage	TF card storage (Max 256G)
Audio feature	Two-way audio
Pan	Up to 308 °
Tilt	Up to 90 °
RJ45 interface	1 RJ45 Ethernet interface, 10/100M adaptive
Protocol	Support N1
Mini illumination	Color: 0.1Lux, Black and white 0.01 Lux
IRLED	Infrared + white light , 8 dual-core ball lights + 4 dual-core gun lights
IR distance	Infrared light 20~30 M, white light 15~20 M
Power	DC12V
Power consumption	≤15W