




# NVR 8900 SERIES

# 4K ULTRA HD

Network Video Recorder

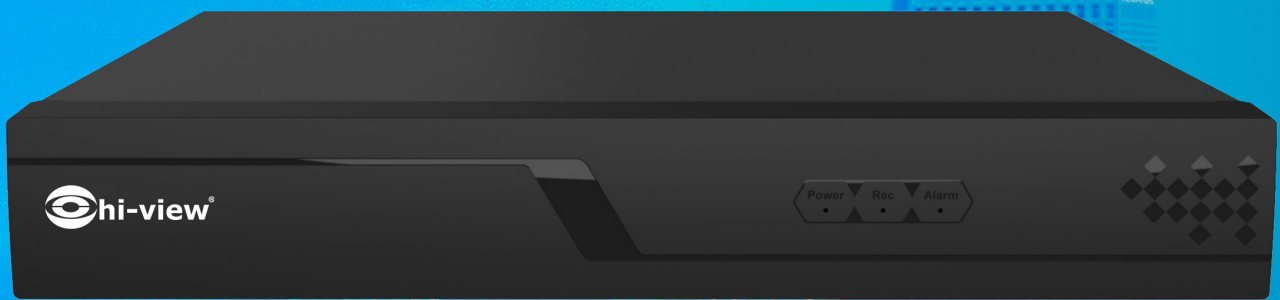

Play back by  
face ID



Play back by  
car shape



HDMI 4K



VGA



ONVIF



Automatic  
networking



Cloud  
Storage



Mobile phone  
remote  
monitoring



Multilingual  
support



Multi-lens  
device support



Lightning  
protection



H.265AI




hiviewXview



Download Application

## NETWORK VIDEO RECORDER

## ONVIF

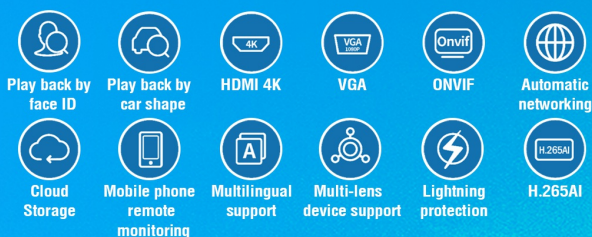

## Feature

- \* 36ch 4K / H.265AI / H.265+(compatible H.265 / H.264)
- \* Playback 4K(1+1) / 5M(3+1) / 4M(4+1) / 3M(5+1) 1080P(8+2)
- \* Compression G.711a
- \* HDD Storage, Network Storage, CCloud Storage
- \* HDMI output 1\*HDMI (MAX:4K)
- \* VGA output 1\*VGA (MAX:1080P)
- \* Ethernet port 1\*RJ45 1\*10/100/1000Mbps Ethernet port
- \* USB Port 2\*USB2.0 ports
- \* HDD 2\*SATA interface (Up to 14TB)
- \* Power supply 12V/4A

## Specification

Model	HPC-8936H2
system	Embedded Linux
<b>Video</b>	
Video input	36ch4K
Playback	4K(1+1) / 5M(3+1) / 4M(4+1) / 3M(5+1) 1080P(8+2)
Decode	H.265AI / H.265+(compatible H.265 / H.264)
<b>Audio</b>	
Compression	G.711a
Intercom	support
<b>Management</b>	
Record mode	Manual>Alarm>Motiondetection>Timing
Inquire mode	Inquire by Time/Calendar/Event/Channel/Face
Storage mode	HDD Storage, Network Storage, CCloud Storage
Backup	Network, USB, SATA
<b>Interface</b>	
HDMI output	1*HDMI (MAX:4K)
VGA output	1*VGA (MAX:1080P)
Ethernet port	1*RJ45 1*10/100/1000Mbps Ethernet port
POE ports	N/A
Audio I/O	1/1(3.5mm)
Alarm I/O	0/0
USB Port	2*USB2.0 ports
HDD	2*SATA interface (Up to 14TB)
<b>General</b>	
Temperature	0C - + 55C
Humidity	10% -90% RH
Power supply	12V/4A
Consumption	<10W(Without HDD)
Weight Around	1.69KG
Dimension	355(L)* 255mm(W)* 55mm(H)



hiviewXview



Download Application