




Features:

- * 5 ports 100Mbps
- * 6KV Lightning & 8KV ESD Protection
- * Compact Design, Competitive Solution


Ports Description:

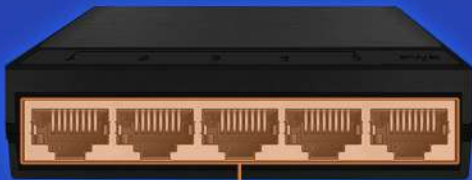

1

1 100Mbps Ports

Dimension (mm)

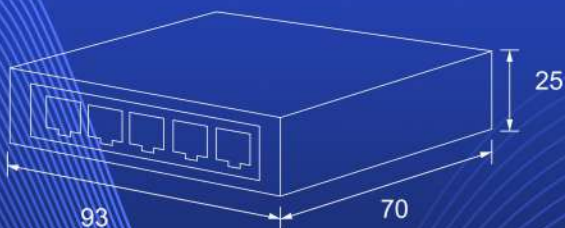

Model	HS-SW5G
Ports	(1~5):10/100/1000Mbps ports (RJ45)
Transmission Rate	2000Mbps Full Duplex; 10 or 100 or 1000 Mbps Half Duplex
Transmission Distance	100m
Performance Specification	Bandwidth:10Gbps Network Latency (10 to 1000Mbps): 16μs (use the 64byte package size) MAC address table: 8K The Frame Filter & Transmission Rate: 14800pps the most for 10M port, 148800pps the most for 100M port; 1488000pps the most for 1000M port
Networking Standard	IEEE 802.3i 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3ab 1000BASE-T IEEE 802.3x Flow Control
Power Support	Power Input: AC 90~264V 3W
Physical Specifications	Size(L*W*H): 93mm*70mm*25mm Weight: 0.18KG
Working Environment	Operating Temperature: -30°C~60°C Storage Temperature: -40°C~70°C Operating Humidity: 10%~90% Non-condensing Storage Humidity: 5%~90% Non-condensing
Certification	CE Mark FCC Part15, Class B RoHS 2.0