




SWITCHING

Power Supply 8 CH 12V / 1A

Technical Specification

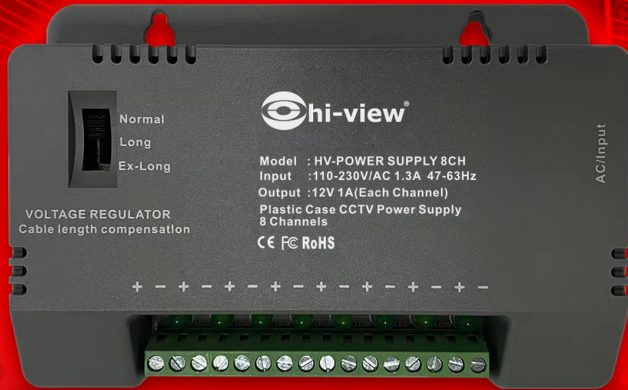

Model	HV-Power Supply 8 ch
Input Voltage	85 VAC-240 VAC
Output Voltage	Normal: 12 VDC / Long: 13.5 VDC Ex-Long: 15 VDC
Rated Output Current	Normal: 8.0 A / Long: 7.2 A Ex-Long: 6.4 A
Rated Power	Output power: 12 W (for one channel) Total power: 96 W
Power Consumption In Idle	≤0.1 W
Efficiency	≥86.95%
Port	
Input Port	2-core female seat C8, with European standard cable
Output Plug	8 channel output terminal
Protection	
Protection	Overcurrent protection, overvoltage protection and short circuit protection
Surge Protection Grade	Common mode: ±4 kV Differential mode: ±2 kV
ESD-protection	Air discharge: ±8 kV Contact discharge: ±6 kV
Protection	
Storage Temperature	-40 °C to +60 °C (-40 °F to +140 °F)
Storage Humidity	10%-90% (RH)
Anti-corrosion Level	Basic Protection
Structure	
Installation	Wall mount
Product Dimensions	140.1 mm × 94.5 mm × 34.2 mm (5.52" × 3.72" × 1.35")
Appearance Color	Gray
Net Weight	0.23 kg (0.51 lb)
Environment	
Operating Temperature	0 °C to +40 °C (+32 °F to +104 °F)
Operating Humidity	10%-90% (RH)
Storage Temperature	-40 °C to +80 °C (-40 °F to +176 °F)
Storage Humidity	5%-95% (RH)

- * Outputs through 8 channels and can supply to multiple devices at the same time.
- * The output voltage can be adjusted to 3 levels, making it easily adapt to various types of devices.
- * Easy to install, the device supports wall mount installation.
- * Designed with protection against overcurrent, overvoltage, and short circuits.
- * Surge protection: common mode: ±4 kV, differential mode: ±2 kV.
- * V-0 fireproof.
- * CE certification.
- * Efficiency Level: VI.

