

GTAD12-200 12V-200AH

DC SERIES-Deep Cycle Battery



Specification

Nominal Voltage	12V	
Nominal Capacity(10HR)	200AH	
Dimension	Length	522 ± 3mm
	Width	240 ± 2mm
	Container Height	221 ± 2mm
	Total Height (with Terminal)	226 ± 2mm
Approx Weight	Approx 57.0 Kg	
Terminal	T11	
Container Material	ABS	
Rated Capacity	214.4AH/10.72A	(20hr , 1.80V/cell,25°C/77°F)
	200AH/20.0A	(10hr, 1.75V/cell,25°C/77°F)
	175.5 AH/35.1A	(5hr, 1.75V/cell,25°C/77°F)
	159.0 AH/53.0A	(3hr, 1.75V/cell,25°C/77°F)
	129.2 AH/129.2A	(1hr, 1.60V/cell,25°C/77°F)
Max. Discharge Current	2000A (5s)	
Internal Resistance	Approx 2.7mΩ	
Operating Temp.Range	Discharge : -15 ~50°C (5 ~122°F)	
	Charge : 0 ~ 40°C (32 ~104°F)	
	Storage : -15~ 40°C (5~104°F)	
Nominal Operating Temp. Range	25 ± 3°C (77 ± 5°F)	
Cycle Use	Initial Charging Current less than 60A.Voltage	
	14.6V~15.0V at 25°C(77°F)Temp. Coefficient -30mV/°C	
Standby Use	No limit on Initial Charging Current Voltage	
	13.6V~13.7V at 25°C(77°F)Temp. Coe ficient -20mV/°C	
Capacity affected by Temperature	40°C (104 °F)	103%
	25°C (77 °F)	100%
	0°C (32 °F)	86%
Self Discharge	GLOBAL POWER batteries may be stored for up to 6 months at 25°C(77°F) and battery should be recharged before use. For highertemperatures the time interval will be shorter.	

Applications

- ◆ Uninterruptable Power Supply(UPS)
- ◆ Electric Power System(EPS)
- ◆ Emergency backup Power Supply
- ◆ Alarm and security system
- ◆ Electronic Apparatus and equipment
- ◆ Communication Power Supply
- ◆ Solar Power System

Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	292.8	246.4	215.3	154.9	123.0	99.9	62.0	48.4	39.2	31.8	27.8	22.7	18.9	10.62
1.80V/cell	374.2	297.7	254.5	182.8	143.1	111.9	67.7	52.0	41.8	34.2	29.8	24.0	19.5	10.72
1.75V/cell	411.1	325.2	273.8	189.8	148.5	117.0	70.2	53.0	42.8	35.1	30.6	24.5	20.0	10.82
1.70V/cell	448.1	347.2	287.7	197.5	154.4	120.7	73.0	54.5	43.9	36.0	31.2	24.8	20.4	11.02
1.65V/cell	483.6	369.2	305.7	208.4	158.3	124.8	75.0	56.8	45.4	37.0	31.9	25.2	20.8	11.16
1.60V/cell	\	394.8	325.6	220.0	165.0	129.2	77.6	58.5	46.8	38.2	32.6	25.4	21.0	11.22

Constant Power Discharge (Watts) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	546.3	464.5	410.3	297.7	238.1	193.8	120.9	94.5	76.7	62.5	54.9	44.8	37.4	21.3
1.80V/cell	688.8	552.9	477.6	347.1	274.6	215.8	131.1	101.2	81.5	66.9	58.6	47.5	39.6	21.4
1.75V/cell	747.5	598.1	509.6	358.5	283.6	224.9	135.6	102.8	83.2	68.6	60.1	48.3	40.0	21.6
1.70V/cell	803.4	633.9	532.5	371.7	294.1	231.5	140.7	105.4	85.2	70.1	61.3	48.9	40.3	22.0
1.65V/cell	860.8	669.7	563.0	390.3	300.3	238.5	144.2	109.6	87.9	72.0	62.6	49.6	41.1	22.2
1.60V/cell	\	707.6	593.6	408.1	310.2	244.9	148.1	112.4	90.3	74.0	63.8	50.0	41.5	22.3

Note The above data are average values, and can be obtained with 3 charge/discharge cycles. These are not minimum values.



GTAD12-200 12V-200AH

DC SERIES-Deep Cycle Battery


Dimensions

T11 Terminal


Unit: mm [inches]

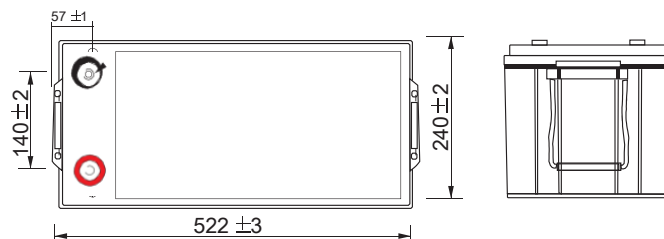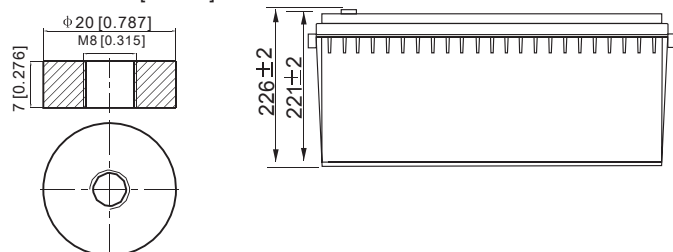


Charging Characteristics (cycle use)

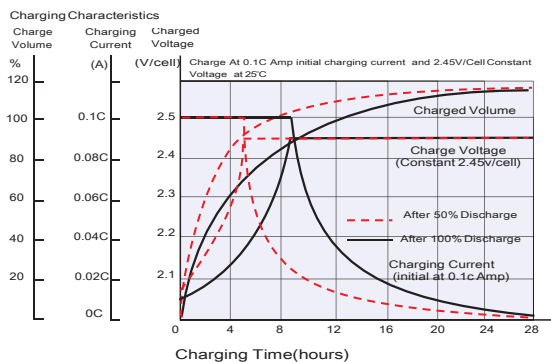


Discharge Characteristics

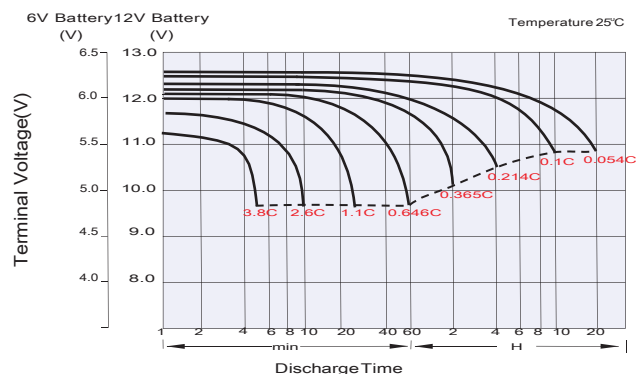


Temperature Effects in Relation to Battery Capacity

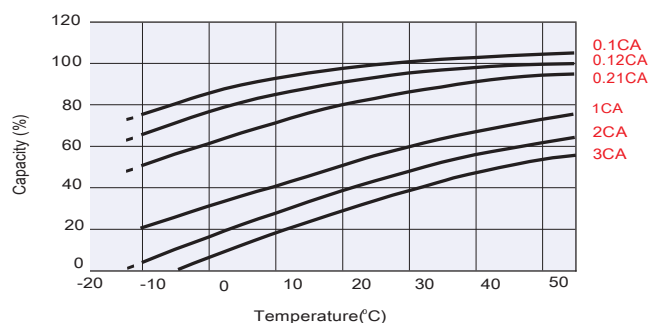

Effect of Temperature on Long Term Float Life

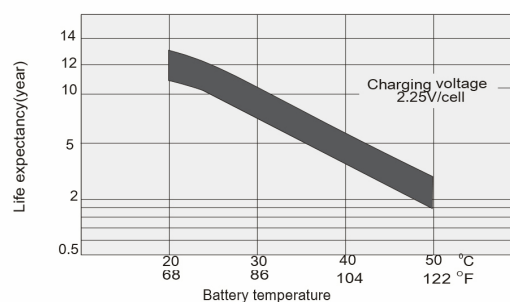

Cycle Life in Relation to Depth of Discharge

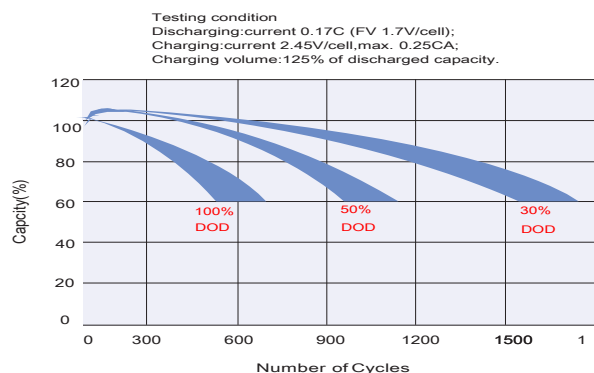

Self Discharge Characteristics

