



# ACS-1200S SERIES

PROFESSIONAL ACTIVE COLUMN SPEAKER SYSTEM



**ACS-1200S SERIES** Professional Active Column Speaker System which can cover the usage area from small to large Designed for hi-end professional sound performance especially for frequency response up to 40Hz ~ 20KHz -10dB, Power maximum 1600Watts Amplifier Class D Tri-amp with DSP processor 5 Preset for optimum performance. High-quality audio streaming with Bluetooth TWS (True Wireless Stereo) Ideal for livesound concert, event, shopping mall, meeting room-training, fitness, restaurant, hotel banquet room.

This series includes ACS-1200S-S (subwoofer), ACS-1200S-C (column speaker) x 2

## FEATURE

- Subwoofer Component 12"
- 2 Satellite Components: 4 x 3" Neodymium Full Range Speaker
- Frequency response: 40Hz~20KHz -10dB
- Max. SPL / (Peak): 122dB/130dB
- Power maximum 1600Watts
- Built-in Amplifier Class D Tri-amp
- Built-in DSP Processor Mode: 5modes (Live, Music, Dance, Pop, Speech)
- Built-in Media player:TWS Bluetooth 5.3(True Wireless Stereo)
- Dispersion Angle (H x V): 80° x 20°
- Operating voltage AC 220 – 240V, 50/60Hz

Certifications : CE and RoHS

## SOUND VISION CO., LTD.

99/189 Soi Kamnan Tinnakorn, Sala Klang, Bang Kruai,  
Nonthaburi 11130 Thailand  
Email : info@soundvision.co.th Support : 02-433-9988  
LINE Official : @soundvision www.soundvisionpro.com




ACS-1200S Series application support

## SPECIFICATIONS

Model	ACS-1200S-S (Subwoofer)	ACS-1200S-C (Column) x2
Transducer	12" Subwoofer Components	4 x 3" Neodymium Full Range Speaker
Frequency Response	40Hz~150Hz (-10dB)	150Hz~20KHz (-10dB)
Rated Power	500W / 1000W (MAX)	2 x 150W (RMS) : 300W/600W(MAX)
Amplifier	Class D Tri-amp	
Sensitivity	91 dB 1m/1W	92 dB 1m/1W
Maximum SPL	122dB / 130dB(Peak)	122dB / 130dB(Peak)
Nominal Impedance	4 Ω	8 Ω
Dispersion Angle ( H x V )	80°X 20°	
Built-in DSP Processor	5 modes (Live, Music, Dance, Pop, Speech)	
Audio Streaming Wireless	TWS Bluetooth 5.3 (True Wireless Stereo)	
Connection		
Line Input	3 x Combo XLR or 1/4" Jack (Female) 1 x RCA (L/R)	
Line Output	1 x XLR (Male)	
Speaker Port	2 x Speakon L/R (Output)	1 x Speakon (Input) x 2
General		
Operating voltage	AC 220 – 240V, 50/60Hz	
Fuse	T3.15AL 250V	
Power consumption (IEC)	300W	
Dimensions (H x W x D)	480 x 370 x 520mm	450 x 85 x 105 mm
Net Weight	21.5kgs.	1.4 kgs.

## EXAMPLE CONNECTION DIAGRAM

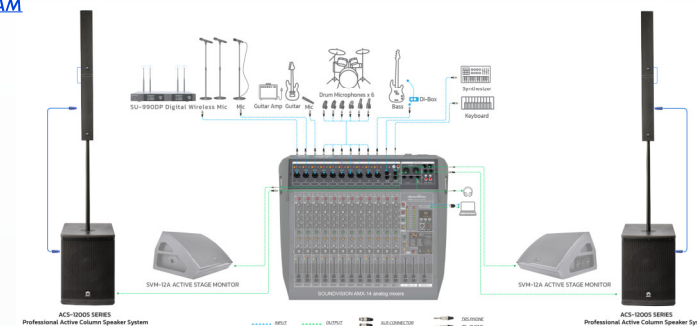

ACS-1200S Series Ideal for live sound concert, event, shopping mall, meeting room – training, fitness, restaurant, hotel banquet room.