




# CLI-4260

## 3-INCH 2WAY COLUMN LOUDSPEAKER WITH 70V/100V : 60W

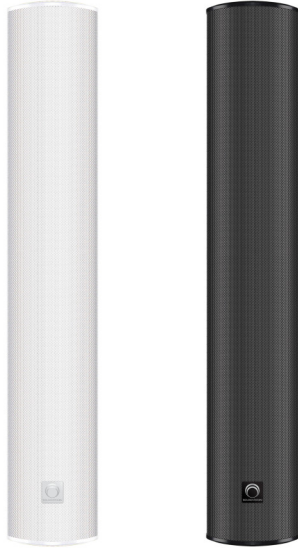

**CLI-4260** 3-inch 2-Way Column loudspeaker with 70V/100V line transformer for installation applications (Weather Resistant) full range column loudspeaker with good clear sound for background music ideal for indoor and outdoor weatherproof IP65 rated. With a power handling 60 Watts, line transformers with multiple for use in **70V/100V Taps at**

*70V : 30W/20W/10W/ 5W/2W , 30W@4Ω*

*100V : 60W/40W/20W/ 10W/5W , 60W@4Ω*

**CLI-4260** Applications designed suitable, such as station gardens, swimming pools, stadiums, tennis courts, churches, etc.

### FEATURE

- Suitable for indoor and outdoor applications.
- All-weather versatility IP65\*
- High sensitivity.
- Transformer Taps 70V, 100V
- 3-inch LF transducer 15 Watts RMS
- 2-inch HF transducer 5 Watts RMS
- Power Handling 60Watts
- Frequency Response 160Hz ~ 16kHz
- Coverage 120°(H) x 80°(V)
- Available in black or white
- Easy and secure wall mount installation in the outdoor area through the supplied strong metal mounting brackets.

### SPECIFICATIONS

Speaker type	Column loudspeaker. Two-Way
Transformer taps	70V : 30W/20W/10W/ 5W/2W , 30W@4Ω 100V : 60W/40W/20W/ 10W/5W , 60W@4Ω
Frequency response	160Hz ~ 16kHz (-3dB)
Sensitivity 1W/1 m	89dB
Maximum SPL/1m (calc)	107dB
Coverage (Nominal -6 dB) H	120° (±5°)
Coverage (Nominal -6 dB) V	80° (±5°)
System power handling	90W Max. / 60W continuous
Driver LF Transducer	4 x 3-inch Waterproof (long-throw polypropylene cone)
Driver HF Transducer	1 x 2-inch (Silk dome)
Nominal impedance (Passive)	4Ω
Connections	A length of connecting cable
Operating temperature	-20 °C to +55 °C
All-weather versatility	IP65*
Indoor / Outdoor	Yes
Color	Black or white
Cabinet material	Aluminum alloy cabinet, engineering - plastics (ABS) for top and bottom cover
Front grille	Aluminum alloy protection grille
Dimensions (H x W x D)	606 x 109 x 102mm (without bracket)
Weight	3 Kgs.