



SMX-4



SMX-6

FEATURE

- SMX-Series professional analog mixer 6 and 8 Channels.
- 2 / 4 mono 1 stereo and 2 USB input channels.
- 48V phantom power supply in each channel.
- 6 special effects of the sound card.
- 24-bit DSP digital effect stereo processor each effect can be adjustable separately.
- 2-In/2-Out, Built-in USB Audio Interface (Audio Player and Recorder)
- Built-in Bluetooth 5.2 player.
- Built-in digital feedback suppressor.
- Power supply for AC 110–240 Voltage.

SMX Series Application : Outdoor Live Band | stage, Live Music and Party...




SPECIFICATIONS

SMX-SERIES	SMX-4	SMX-6
Input channels	6	8
Mono (Mic/Line)	2 (Combo XLR)	4 (Combo XLR)
Stereo (Line)	1 (TS) (3/4) 1 Phone (TRS)	1 (TS) (5/6) 1 Phone (TRS)
USB	2	2
Output channels		
Master out	2 (TS)	
Phones out	1 (TRS)	
Digital I/O	2-in/2-out, USB audio interface (Audio player and recording)	
Gain	-10 dB/+60 dB	
Input channel EQ		
Mono	High: Gain+15dB/-15dB Frequency response: 12kHz(shelving) Mid: Gain+15dB/-15dB Frequency response: 2.5kHz(peaking) Low: Gain+15dB/-15dB Frequency response: 80Hz(shelving)	
Stereo	High: Gain+15dB/-15dB Frequency response: 12kHz(shelving) Low: Gain+15dB/-15dB Frequency response: 80Hz(shelving)	
LED level meter	2 x 6 points LED meter (Clip, 8, 6, 0, 6, 24)	
Digital effects	24 programs, Control Knob.	
Special effects	6 SFX	
GENERAL		
Frequency response	20Hz-20KHz@+ -0.5dB	
Total harmonic distortion	<0.03@1khz	
Operating temperature	0°C to 40°C	
Phantom power	+48V per channel	
Power consumption	15W	
Power requirements	110V-240V/50-60Hz	
Net weight	1.8Kgs.	2 Kgs.
Dimensions (W x D x H)	25.5*21.5*9.2 CM	30.5*21.5*9.2CM

Verification of compliance :CE | RoHS

DIAGRAM APPLICATION EXAMPLE

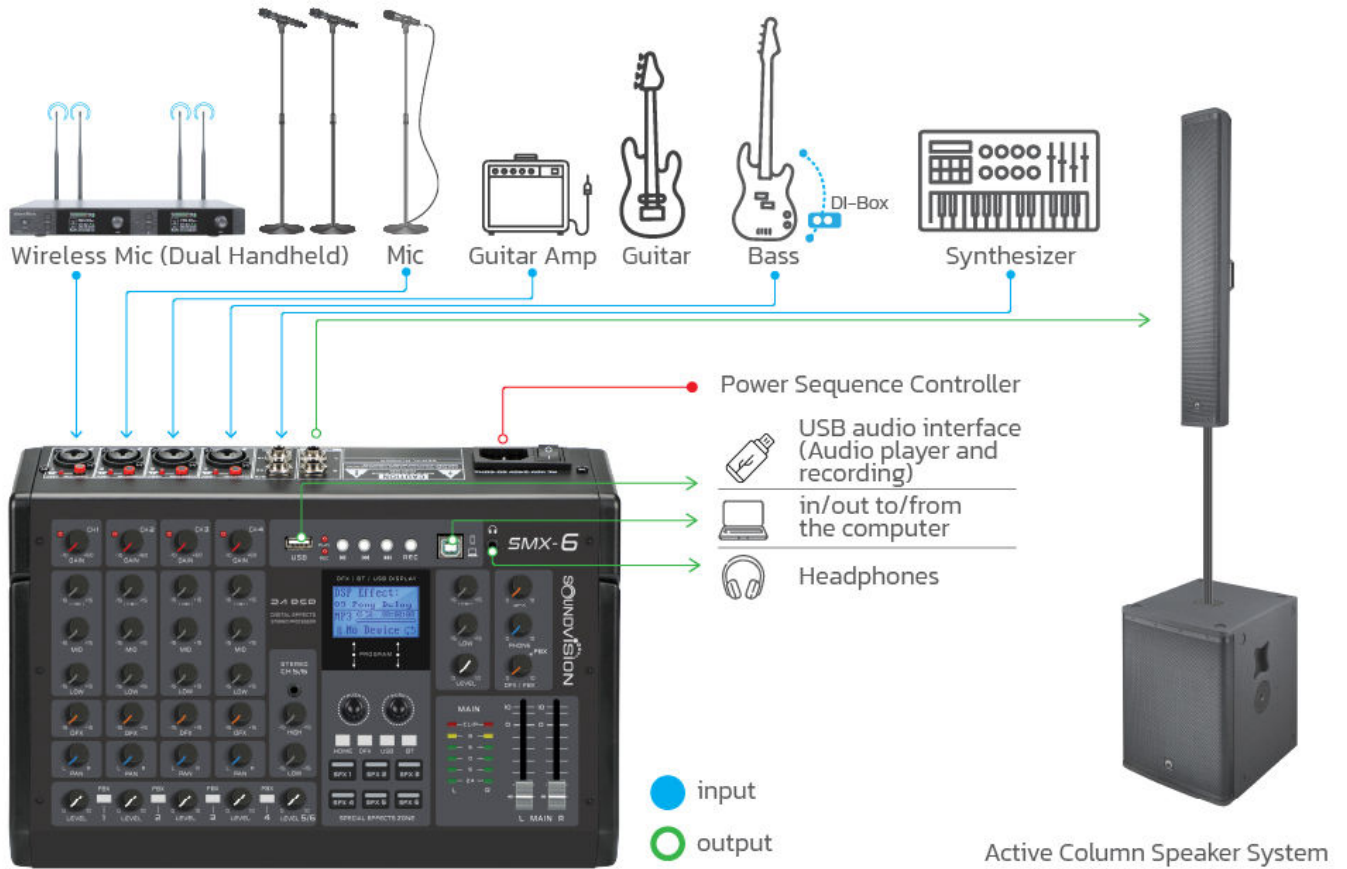

SMX-6 professional analog mixer 8 Channels.

