



ESiGO 8 Pro



PROFESSIONAL PORTABLE POWERED SPEAKER.

WWW.SOUNDVISIONPRO.COM



ENJOY YOUR SOUND ANYWHERE! WITH ESIGO 8 PRO PROFESSIONAL PORTABLE POWERED SPEAKER.

Compact and lightweight design. By loudspeaker sound high-quality 8" woofer Built-in Class-D Bi-amplifier with 4 DSP processors for smooth sound audio and Battery run time Up to 10 hours (depending on usage). Professional sound high power 190 watts maximum SPL of 113 dB. Applications for outdoor performances, presentations, parties, events, fitness, live music, sing a song, by wireless music via Bluetooth TWS 5.0 (True Wireless Stereo)

- 2-way Active speaker.
- 8" LF woofer and 1" HF compression driver.
- Frequency response : 60Hz-19kHz
- Built-in 3 Channels mixer.
 - 2 CH Mic/line mono combo (XLR/TRS)
 - 1 CH AUX 1 x RCA(L/R) / 1 x 3.5mini jack.
 - Input channel functions CH1, 2 selection switch used for guitar signal input.
- Built-in Line Output : XLR
- Bi-Amplifier CLASS-D / 190 Watts. (MAX)
- Bluetooth TWS (True Wireless Stereo) Version 5.0
- DSP 4 mode : Music, Live, Monitor, Speech
- Battery run time: Up to 10 hours (depending on usage)
- Coverage angle (H x V) : 100° x 60°
- Operating voltage : AC 100-240V 50/60Hz / DC 15V

Applications: outdoor performances, presentations, parties, events, fitness...



ESIGO 8 PRO PROFESSIONAL PORTABLE POWERED SPEAKER.

8 WOOFER
TWO WAY
ACTIVE SPEAKER

2-way Active speaker.
8" LF woofer and
1" HF compression driver.

190w
CLASS D
BI-AMPLIFIER


Bi-Amplifier CLASS-D
190 Watts. (MAX)

TWS 5.0

Bluetooth TWS Version 5.0
(True Wireless Stereo)

4 DSP MODES

DSP 4 mode :
1.Music, 2.Live, 3.Monitor, 4.Speech



Rechargeable Battery
7800mAh Lithium Battery
Battery run time
9-10 hours (Vol. 25%) / 6-8 hours (Vol. 50%) / 3.5-5 hours (Vol. 80% up)



Built-in 3 Channels mixer.

- 2 CH Mic/line mono combo (XLR/TRS)
- 1 CH AUX 1 x RCA(L/R) / 1 x 3.5mini jack.
- Input channel functions CH1, 2 selection switch used for guitar signal input.

Built-in Line Output : XLR

MULTI-POSITION


Coverage angle:
H 100° x V 60°



Speaker Stand



Tilt-Back



Monitor

SPECIFICATIONS

AUDIO

Speaker type	Portable 2-way active speaker
Drivers	LF 8" woofer, HF 1" compression driver
Frequency response	60Hz-19KHz
Maximum SPL	113dB
Sensitivity 1w/1m	95dB
Coverage angle (H x V)	100° x 60°
Amplifier	Bi-Amplifier CLASS-D
Amplifier rating	190W (MAX)
THD	<0.1% 20Hz-20KHz
Operating voltage	AC 100-240V 50/60Hz / DC 15V

CONNECTION

Input	2 Mic/line mono combo (XLR/TRS) AUX 1 x RCA(L/R) / 1 x 3.5mini jack
- Input channel functions	CHI, 2 selection switch used for guitar signal input
Output	XLR
EQ	High, Bass, ±15dB

MEDIA PLAYER

Bluetooth Version	TWS 5.0
Bluetooth Range	>15 Meters

DSP PROCESSOR

Dsp mode	1. Music, 2.Live, 3.Monitor, 4.Speech
Sampling frequency	48KHz, MIC Lowcut, Crossover, Limiter, Talkover, Reverb, Parameter EQ


BATTERY

Rechargeable Battery	7800mAh Lithium Battery
Battery run time	9-10 hours (Vol. 25%) / 6-8 hours (Vol. 50%) / 3.5-5 hours (Vol. 80% up)
Recharge Time	Approximately 4 hours

GENERAL

Enclosure	ABS
Grille material	Metal
Color	Black
Dimensions (H*W*D)	398.76 x 270 x 280mm
Weight	8kgs

DIMENSIONS

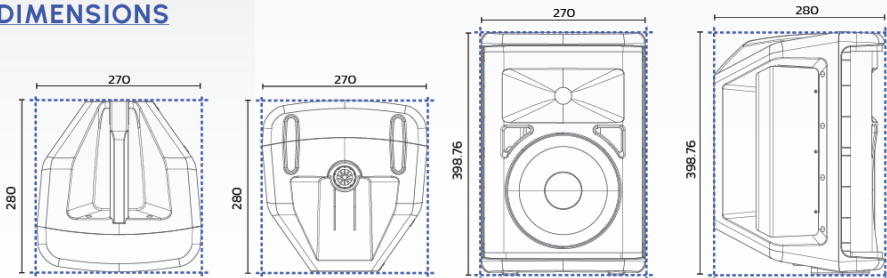

SOUND VISION CO., LTD.

99/189 Soi Kamnan Tinnakorn, Sala Klang, Bang Kruai, Nonthaburi 11130 Thailand
 Email: info@soundvision.co.th Support: 02-433-9988
 LINE Official: @soundvision www.soundvisionpro.com

