
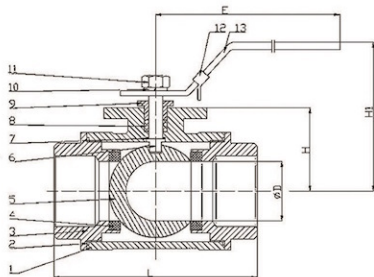


Stainless Steel 3Way Ball Valve, BSPT (T/L Port)

Model : S3MBA-S304 T, S3MBA-S304 L, S3MBA-S316T, S3MBA-S316L

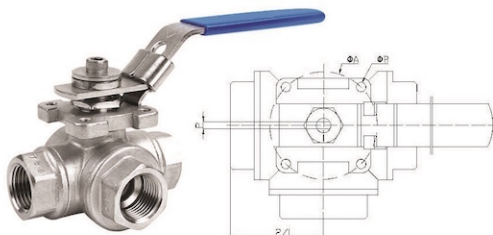

Specification Standards :

- Pipe threaded in accordance : BSPT

Features :

- Investment casting body
- 3 way body design, T/L port
- Locking device, lever handle operation
- ISO mounting pad 5211
- Test and inspection EN12266 , MSS SP-110
- Available upon special request

Application :

- For general and industrial services
- Applicable medium : water, oil, gas

Materials :

| No. | Parts | Material |
|-----|----------------|---------------|
| 1 | Body | CF8M / CF8 |
| 2 | Body gasket | PTFE |
| 3 | Cap | CF8M / CF8 |
| 4 | Seat | PTFE / RPTFE |
| 5 | Ball | CF8M / CF8 |
| 6 | Stem | SS316 / SS304 |
| 7 | Thrust washer | PTFE |
| 8 | Stem packing | PTFE |
| 9 | Stop nut | SS201 |
| 10 | Spring washer | SS201 |
| 11 | Stem nut | SS201 |
| 12 | Locking device | SS201 |
| 13 | Handle | SS201 |

Test Requirements

| | |
|------------------------|--------------------|
| Maximum Pressure | 600 PSI (40 Bar) |
| Shell Test Pressure | 900 PSI (60 Bar) |
| Applicable Temperature | -10 ~ 150 °C |

Dimensions

| Size | | | | | | | | | mm |
|------|------|------|------|--------|--------|------|------|-------|----|
| | 1/2" | 3/4" | 1" | 1-1/4" | 1-1/2" | 2" | | | |
| E | 120 | 120 | 120 | 120 | 160 | 160 | 175 | 175 | |
| H | 28 | 28 | 28 | 33 | 35.5 | 44.5 | 52 | 57 | |
| H1 | 60.5 | 60.5 | 60.5 | 60.5 | 71 | 80 | 95.5 | 100.5 | |
| L | 50 | 50 | 72 | 80 | 87 | 112 | 132 | 145 | |
| P | 5 | 5 | 5 | 6 | 7 | 7 | 9 | 9 | |
| ØA | 36 | 36 | 36 | 42 | 42 | 42 | 50 | 50 | |
| ØB | M5 | M5 | M5 | M5 | M5 | M5 | M6 | M6 | |
| ØD | 8 | 8 | 12 | 15 | 18 | 25 | 32 | 38 | |