


Stainless Steel Valve Spring Check Valve, BSPT

Model : SSP-S04

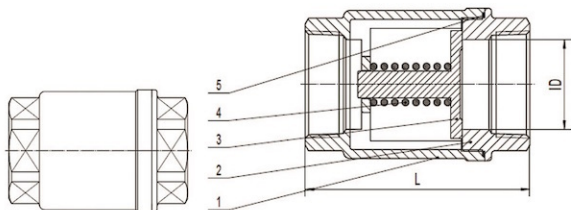

Specification Standards :

- Design & manufacture : ASTM B16.34
- Thread end : BSP, BSPT.

Features :

- Screwed end BSPT/PP connection
- The valve are designed to prevent reverse flow automatically
- Spring in stainless steel
- Stem in stainless steel
- Spring load type disc

Application :

- For general and industrial services
- Applicable medium : water, light oil, & non-corrosive and non-combustible gas

Materials :

No.	Parts	Material
1	Body	CF8M / CF8
2	Bonnet	CF8M / CF8
3	Disc	CF8M / CF8
4	Spring	SS316 / SS304
5	Seal ring	PTFE

Test Requirements

Working Pressure	150 PSI (10 Bar)
Maximum Pressure	200 PSI (14 Bar)
Shell Test Pressure	300 PSI (21 Bar)
Applicable Temperature	200 °C

Dimensions

mm

Size	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
Inner Diameter, ID	15	20	25	31	40	45
Length, L	58	62	74	86	98	112