



aerospace climate control electromechanical filtration fluid & gas handling hydraulics pneumatics process control sealing & shielding





Sporlan Replacement Parts

Bulletin 122, June 2023



ENGINEERING YOUR SUCCESS.

△WARNING – USER RESPONSIBILITY

Failure or improper selection or improper use of the products described herein or related items can cause death, personal injury and property damage.

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.

The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.

To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

OFFER OF SALE

The items described in this document are hereby offered for sale by Parker Hannifin Corporation, its subsidiaries or its authorized distributors. This offer and its acceptance are governed by the provisions stated in the detailed "Offer of Sale" elsewhere in this document or available at www.parker.com.

FOR USE ON REFRIGERATION and/or AIR CONDITIONING SYSTEMS ONLY

Bulletin 122, June 2023 supersedes Bulletin 122, May 2019 and all prior publications.


Table of Contents

| Level Master Control 2 |
|-------------------------------|
| Thermostatic Expansion Valves |
| Flare and Solder Connections |
| Types RC and CBBI4 |
| Types R, SR, ER and BBI5 |
| Types BF, SBF and EBF6 |
| Types F, EF, FB and SFB |
| Types EG, G and C |
| Types S and EBS9 |
| Туре Р |
| Туре О 11 |
| Types Q and BQ12-14 |
| Flanged |
| Types H and M |
| Types V and W 18 |
| Replacement Parts Kits 19 |
| Identifying Sporlan TEVs |
| Accessories |
| Solenoid Valves |

| Solenoid Valves |
|---|
| Rapid Cycle Series 23 |
| XWG, XXF, XUP, XRN, XRM, XPO |
| Industrial Series 24 |
| W3, W6, W14, W19, W25 |
| (K)(B)R183, (K)(B)R184, (K)(B)R246 |
| XOF, XJH |
| Normally Closed Series |
| A3, E3, E5 |
| (M)B6/E6 |
| (C)(M)B9/E9, (C)(M)B10/E10 |
| (C)(M)B14/E14, (C)(M)B19/E19 |
| (M)B25/E25, (M)E35, (M)E42, (M)E43 |
| Normally Closed E-HP Series |
| Normally Open Series |
| OB9/OE9, OB10/OE10, OB14/OE14, OB19/OE19 |
| OB25/OE25, OE35, OE42, OE43 |
| Normally Open OE-HP Series |
| 3-Way Valve Series |
| 10G, 8D, 12D, 16D |
| Parts Kits |
| Cap Screw, Bolt and Nut Specifications 37 |
| Replaceable Core Catch-All® Filter-Driers |
| C-R420 Series |
| C-480 through C-1920 Series |
| C-30000 and C-40000 Series |
| Replaceable Suction Filters |
| RSF-480 and RSF-960 Series |
| Pressure Regulating Valves |
| (S)ORIT Series |
| (S)ORIT-PI Series |
| |

| (A)DRI(E), (A)DRS(E), (A)DRP(E) and (A)DRH(E) Series | 49 50 51 -54 55 56 56 56 |
|---|--|
| Electric Valves | |
| CDS Series SORIT/A8/A9 to CDS Series SDR Series SEI, SEH and SEHI Series SER, SERI and SSER Series EEV Cross Reference MTW Series GC and FCB Series. SPW Series. Electric Valve Cable Kits Control Boards IB. TCB Series Controller Packages CO ₂ Series Kelvin II Series S3C Series | 58 59 60 61 62 63 63 64 65 65 66 67 67 67 68 68 68 68 |
| Control Accessories69 Moisture and Liquid Indicators | -70 |
| See-All [®] Series | . 71 |
| Oil Level Control Systems | |
| Oil Filters | 2-73 73 |
| Strainers | |
| ZoomLock MAX | |
| Alpha-Numeric Parts List | |
| Terms of Sale with Warranty Limitations | |
| iennis of date with wallanty Linniduolis. | 00 |

Level Master Control

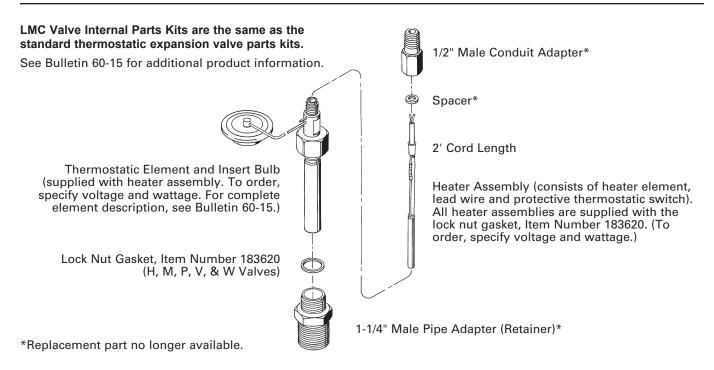

Thermostatic Expansion Valves Flare and Solder Connections

| | | | THERM | OST/ | ATIC I | EXPA | NSIO | N VA | LVE | REPL | ACEN | IENT | PAR | TS | | | | | | | | | | | | | | | | | | | |
|--------------|-----------------------------|----------------------|----------|---|--------|------|------|------|-----|------|------|------|-----|----|---|---|-----|---|------------|------------|----------|--|--|---|--|--|---|--|--|--|--|--|--|
| ITEM PART NU | | IBER and DESCRIPTION | | VALVE TYPE and QUANTITY OF PART WBER and DESCRIPTION REQUIRED PER VALVE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| NUMBER | DRAWINGS ON PAGES 4 thru 11 | | | R | SR | ER | RC | F | EF | BF | EBF | SBF | G | EG | C | S | EBS | Р | Small O | Large O | | | | | | | | | | | | | |
| 183019 | 772-000 | | 1/4" SAE | | | | | | | | | | 1 | | | | | | | | | | | | | | | | | | | | |
| 183015 | 3008-000 | | 1/4 SAE | 1 | | | | 1 | | 1 | | | | | | | | | | | | | | | | | | | | | | | |
| 183017 | 017 1538-000 | | 3/8″ SAE | 1 | | | | 1 | | 1 | | | 1 | | | | | | | | | | | | | | | | | | | | |
| 183023 | 588-000 | | 3/0 3AL | | | | | | | | | | | | 1 | | | | | | | | | | | | | | | | | | |
| 183025 | 589-000 | | 1/2" SAE | | | | | | | | | | | | 1 | | | | | | | | | | | | | | | | | | |
| 183024 | 590-000 | Inlet | 5/8" SAE | | | | | | | | | | | | 1 | | | | | | | | | | | | | | | | | | |
| 183026 | 1524-000 | Strainer | | | | 1 | | | 1 | | | | | | | | | | | | | | | | | | | | | | | | |
| 183378 | 1935-000 * | | 3/8" ODF | - | | | | | | | | | | | 1 | | | | | | | | | | | | | | | | | | |
| 183002 | 3427-000 ** | | | | 1 | | | | | | | 1 | | 1 | | | | | | | | | | | | | | | | | | | |
| 908014 | 877-003 | | | | | | | | | | | | | | | | | | | 1 | | | | 1 | | | | | | | | | |
| 183020 | 1543-002 | | | | | | | | | | | | | | | | - | - | | - | 1/4" ODF | | | 1 | | | 1 | | | | | | |
| 908012 | 877-004 | | 1/2" ODF | | | 1 | 1 | | 1 | | | | | | | | 1 | | | | | | | | | | | | | | | | |
| 908009 | 877-005 | | 5/8" ODF | | | 1 | | | | | | | | | | | 1 | | | | | | | | | | | | | | | | |
| 183880 | 220-000 | | | | | | | | | | | | | | | | | 1 | | 1 | | | | | | | | | | | | | |
| 183884 | 20326-000‡ | Seal Cap | | | | | | | | | | | 1 | 1 | 1 | 1 | 1 | | 1 | | | | | | | | | | | | | | |
| 183888 | 1053-000 *** | | | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | | | | | | | | | | | | | | | | | | | |
| 183606 | 621-017 | Seal Cap G | asket | | | | | | | | | | | | | | | 1 | | 1 | | | | | | | | | | | | | |
| _ | † | Spring | | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | | | | | | | | | | | |
| 183092 | 2113-000 | | | | | | | | | | | | | | | | | | 1 | | | | | | | | | | | | | | |
| 183094 | 413-000 | Spring Guic | le | | | | | | | | | | 1 | 1 | 1 | 1 | 1 | | | | | | | | | | | | | | | | |
| 183098 | 213-000 | | | | | | | | | | | | | | | | | 1 | | 1 | | | | | | | | | | | | | |
| 183422 | 128-001 | Pushrod Pa | | | | | | | | | | | | | | | | 2 | | | | | | | | | | | | | | | |
| 183421 | 124-000 | Pushrod Pa | cking | | | | | | | | | | | | | | | 2 | | | | | | | | | | | | | | | |

† Specify thermostatic charge and valve type.

20326-000 replaces obsolete part number 420-000.


* Used on Type EG Valves manufactured prior to date code 2294. Strainer has 1/2" hex head.

** Used on Type EG Valves manufactured on and after date code 2294, and all Type SBF Valves. Strainer has 5/8" hex head. Strainers manufactured prior to 2003 may be shorter in length than current strainer. The current strainer will fit in these valves, but removal of the thermostatic element may be necessary. See page 22, Strainer Modifications, for more information.

*** Same item as part number 20325-000. Use item number 183888 for replacement.

Thermostatic Expansion Valves Types RC and CBBI*


Type CBBI valves are OEM only and can have any fitting combination.

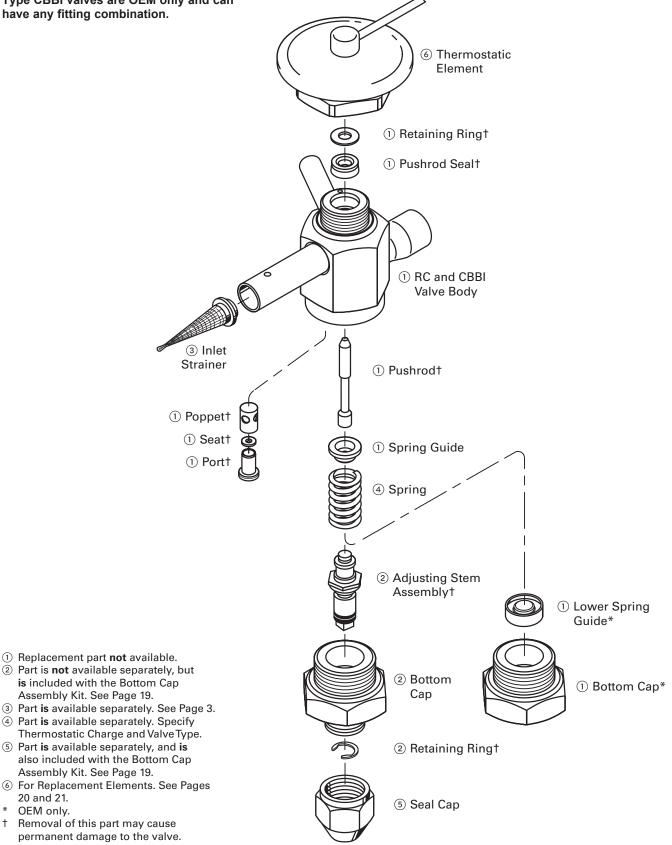

- 2 Part is **not** available separately, but
- is included with the Bottom Cap Assembly Kit. See Page 19.
- ③ Part is available separately. See Page 3.
- ④ Part is available separately. Specify Thermostatic Charge and Valve Type.
- 5 Part is available separately, and is also included with the Bottom Cap Assembly Kit. See Page 19.
- 6 For Replacement Elements. See Pages 20 and 21.
- OEM only.
- † Removal of this part may cause permanent damage to the valve.


Thermostatic Expansion Valves Types R, SR, ER and BBI*

See Parts Table on Page 3

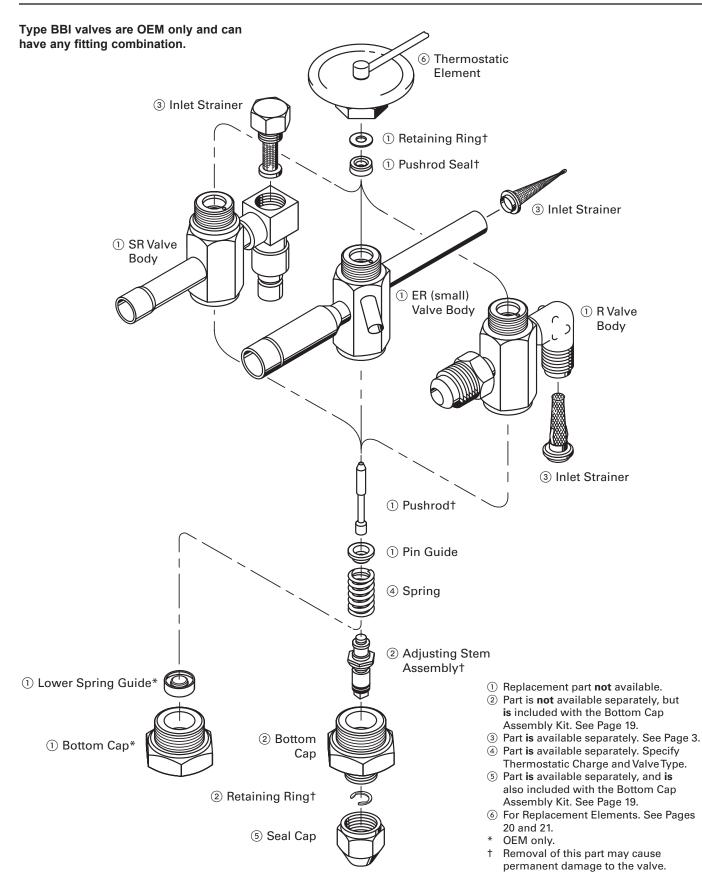


†

Thermostatic Expansion Valves Types BF, SBF and EBF

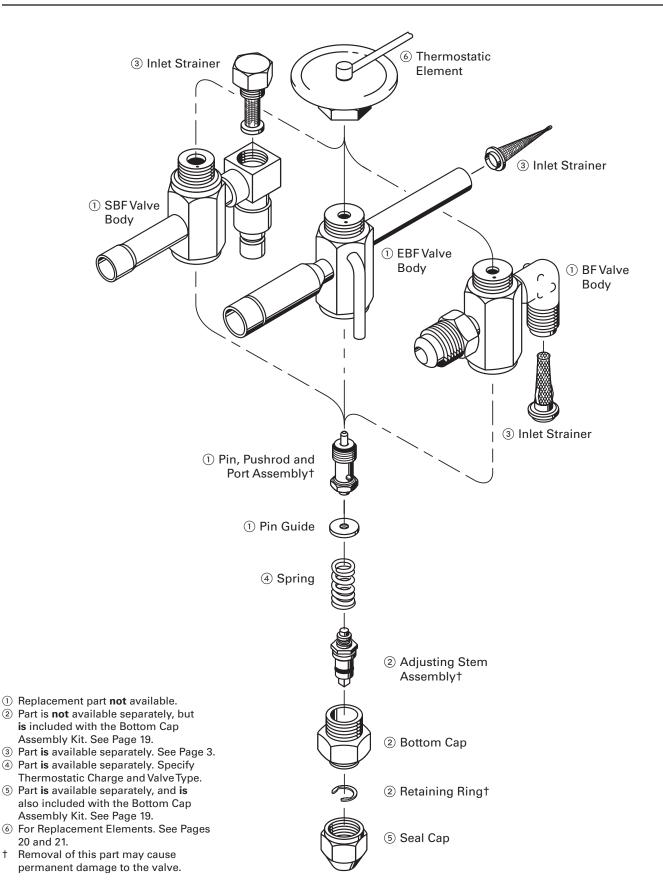


Thermostatic Expansion Valves Types F, EF, FB* and SFB*

See Parts Table on Page 3

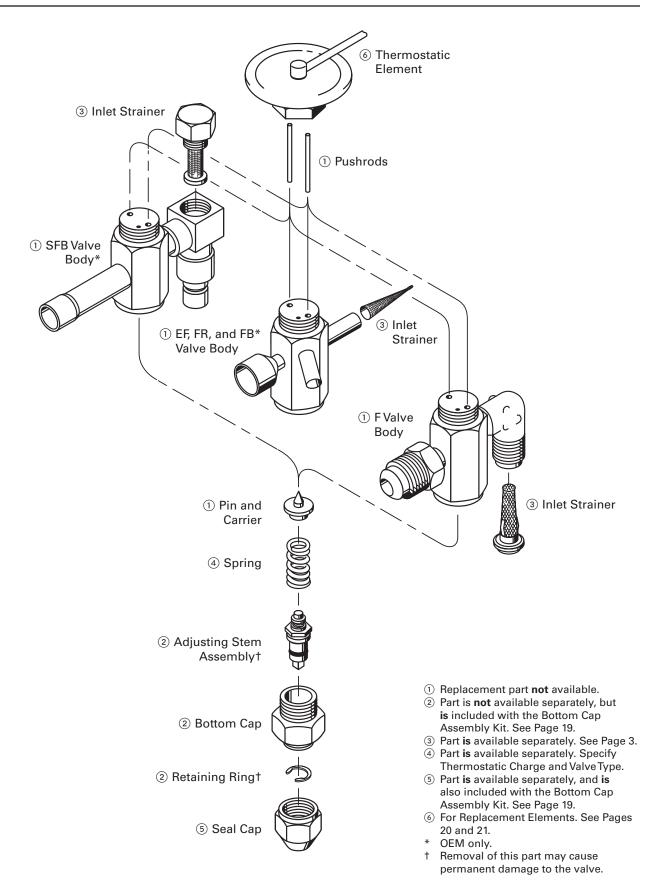


Thermostatic Expansion Valves **Types EG, G and C**

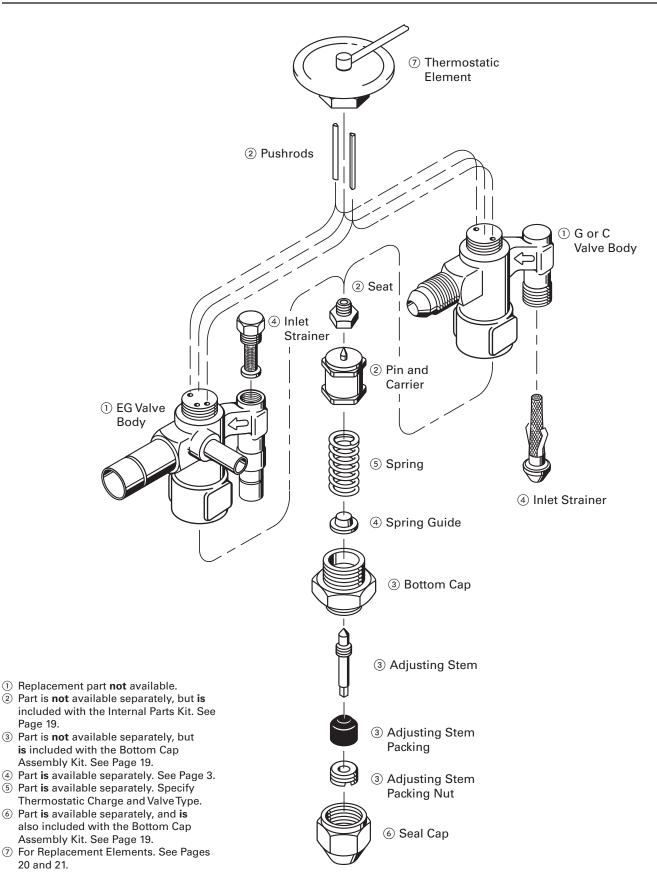


Thermostatic Expansion Valves **Types S and EBS**

See Parts Table on Page 3

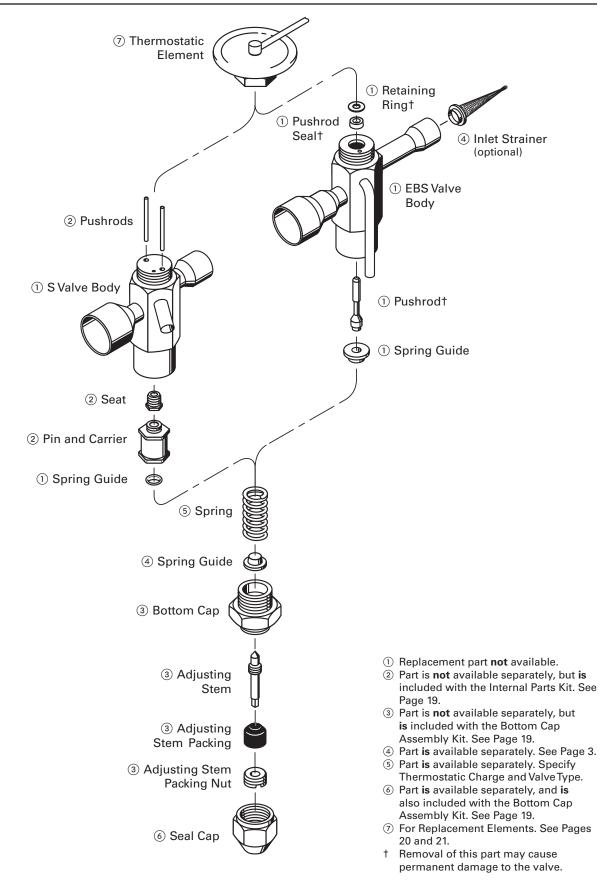


Thermostatic Expansion Valves **Type P**

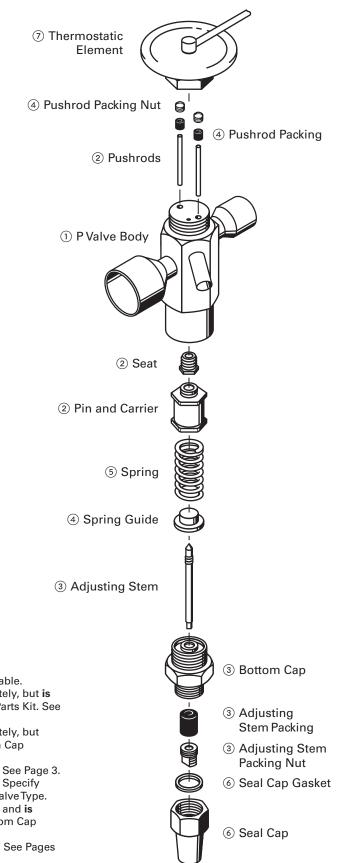

- ① Replacement part **not** available.
- ② Part is not available separately, but is included with the Internal Parts Kit. See Page 19.
- ③ Part is not available separately, but is included with the Bottom Cap Assembly Kit. See Page 19.
- ④ Part is available separately. See Page 3.
- 5 Part **is** available separately. Specify Thermostatic Charge and Valve Type.
- 6 Part is available separately, and is also included with the Bottom Cap Assembly Kit. See Page 19.
- For Replacement Elements. See Pages 20 and 21.

Thermostatic Expansion Valves Type O (small and large)

See Parts Table on Page 3

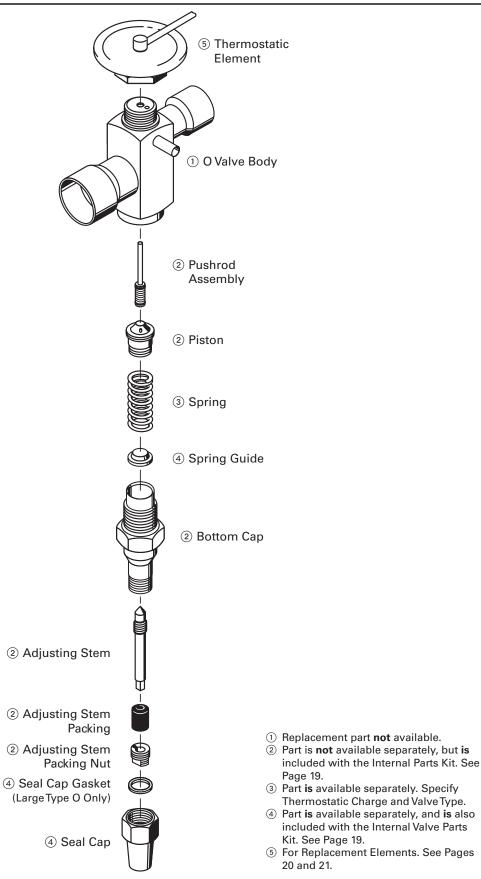


Thermostatic Expansion Valves Types Q and BQ

| (| D CARTRIDGE SI | ERVICE KIT PAR | TS | B | O CARTRIDGE S | ERVICE KIT PAP | RTS | | | | |
|----------------|----------------|--------------------|----------------|-------------------------|----------------|----------------------------------|---------------|--|--|--|--|
| ITEM NUMBER | PART NUMBER | SIZE | COLOR CODE | ITEM NUMBER | PART NUMBER | SIZE | COLOR CODE | | | | |
| | CARTRIDGE | AND I.D. TAG* | | CARTRIDGE AND I.D. TAG* | | | | | | | |
| 168070 | 0C-0 | 0 | Red | 168303 | BQC-AAA | AAA | Red | | | | |
| 168072 | QC-1 | 1 | Yellow | 168304 | BQC-AA | AA | Yellow | | | | |
| 168074 | QC-2 | 2 | Green | 168306 | BQC-A | A | Blue | | | | |
| 168076 | QC-3 | 3 | Blue | 168307 | ВОС-В | В | Pink | | | | |
| 168078 | QC-4 | 4 | Pink | 168308 | BQC-C | С | White | | | | |
| 168080 | QC-5 | 5 | Black | 168701 | BQC-AA-B15 | AA | Yellow | | | | |
| 168082 | QC-6 | 6 | White | 168702 | BQC-A-B15 | A | Blue | | | | |
| | | | | 168703 | BQC-B-B15 | В | Pink | | | | |
| | | | | 168704 | BQC-C-B15 | С | White | | | | |
| | MISCELLAN | IEOUS PARTS | | | MISCELLAN | EOUS PARTS | | | | | |
| 184001 | 0B-1 | Oil Bottle (With O | il) | 184001 | 0B-1 | Oil Bottle (With Oi | 1) | | | | |
| 184002 | AW-1 | 4 mm Allen Wren | ch | 184008 | 4444-000 | BQ Cartridge Tool | | | | | |
| 184003 | CSK-1 | Q Cartridge Servi | ce Kit (Empty) | 184010 | BCSK-1 | BQ Cartridge Service Kit (Empty) | | | | | |
| 183012 | 2384-000 | (4) Pushrods | | 050147 | 4500.010 | Cartridge O-Ring | | | | | |
| 184004 | 791-001 | Cartridge O-Ring | | 958147 | 4508-010 | (Cartridge Require | es 2 O-Rings) | | | | |

* The ID tag is included with each cartridge.

Each cartridge size is available only in multiples of 5.

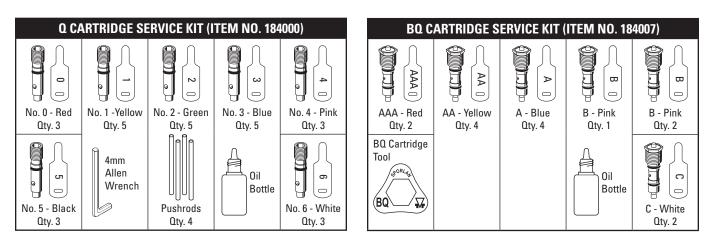


| | Q and BQ REPLACEMENT PARTS | | | | | | | | | | | | |
|----------------|----------------------------|----------------|--------------------|-----|----|---|-----|-----|---|--|--|--|--|
| ITEM NUMBER | PART NUMBER | | | | | VALVE TYPE and QUANTITY OF PART REQUIRED PER VALVE | | | | | | | |
| | NUNDER | DRAWINGS ON P | ۵ | SQ. | EQ | BQ | SBQ | EBO | | | | | |
| 183015 | 3008-000 | | 1/4" SAE | 1 | | | 1 | | | | | | |
| 183017 | 1538-000 | | 3/8″ SAE | 1 | | | 1 | | | | | | |
| 183002 | 3427-000 | Inlet Strainer | 3/8" ODF - | | 1 | | | 1 | | | | | |
| 908014 | 877-003 | | | | | 1 | | | 1 | | | | |
| 908012 | 877-004 | | 1/2" ODF | | | | | | 1 | | | | |
| 183888 | 20325-000*** | Seal Cap | Seal Cap Spring | | | 1 | 1 | 1 | 1 | | | | |
| _ | t | Spring | | | | 1 | 1 | 1 | 1 | | | | |

Specify Thermostatic Charge and Valve Type. † **

See Page 19 for Bottom Cap Assembly Kit.

*** Part number 20325-000 has replaced part number 1053-000.

Thermostatic Expansion Valves **Types Q, SQ and EQ**

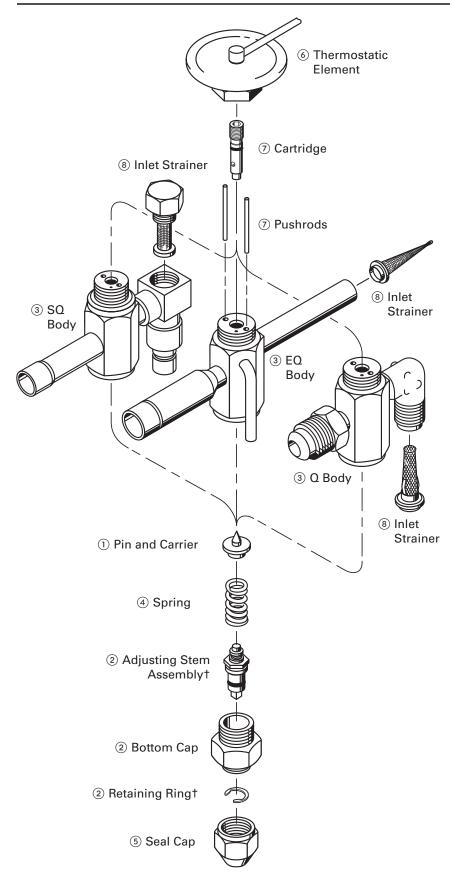

See Parts Table on Page 12

| | Q VALVE BODY | |
|-------------------------|--------------------------------|----------------|
| VALVE TYPE | STANDARD CONNECTIONS Inches | ITEM NUMBER |
| | Inlet x Outlet | NOMBEN |
| 0 | 3/8" x 1/2" SAE | 168000 |
| Internally | 1/4" x 1/2" SAE | 168011 |
| Equalized | 1/2" x 3/8" SAE | 168012 |
| QE | 1/4" x 3/8" x 1/4" SAE | 168017 |
| Externally | 1/4" x 1/2" X 1/4" SAE | 168016 |
| Equalized | 3/8" x 1/2" x 1/4" SAE | 168005 |
| SQ | 1/4" x 1/2" ODF | 168009 |
| Internally Equalized | 3/8" x 1/2" ODF | 168010 |
| SQE | 1/4" x 3/8" x 1/4" ODF | 168034 |
| Externally | 1/4" x 1/2" x 1/4" ODF | 168014 |
| Equalized | 3/8" x 1/2" x 1/4" ODF | 168015 |
| | 1/4" x 3/8" ODF | 168029 |
| | 1/4" x 1/2" ODF | 168030 |
| EQ* | 3/8" x 3/8" ODF | 168196 |
| Internally | 3/8" x 1/2" ODF | 168144 |
| Equalized | 3/8" Elbow x 1/3" ODF | 168007 |
| | 3/8" x 5/8" ODF | 168164 |
| | 1/2" x 5/8" ODF | 168153 |
| | 1/4" x 3/8" x 1/4" ODF | 168031 |
| | 1/4" x 1/2" x 1/4" ODF | 168032 |
| EQE* | 3/8" x 1/2" x 1/4" ODF | 168150 |
| Externally | 3/8"Elbow x 1/2" x 1/4" ODF | 168018 |
| Equalized | 3/8" x 5/8" x 1/4" ODF | 168156 |
| | 1/2" x 5/8" x 1/4" ODF | 168151 |
| | 1/2" x 7/8" x 1/4" ODF | 168152 |

⁴ The straight extended connections of the EQ body series are designed for easy installation on air conditioning applications. The longer connections and resulting body configurations do not allow it to be packaged in the Q Carrying Case. All EQ and EQE bodies are supplied with an inlet strainer: Item No. 908014, P/N 877-003 (3/8 ODF) or Item No. 908012, P/N 877-004 (1/2 ODF).

① Replacement part **not** available.


- ② Part is not available separately, but is included with the Bottom Cap Assembly Kit, See Page 19.
- ③ Part is available separately. See Table on this Page.
- ④ Part is available separately. Specify Thermostatic Charge and Valve Type.
- ⑤ Part is available separately, see Table on Page 12, and is also included with the Bottom Cap Assembly Kit. See Page 19.
- For Replacement Elements. See Pages 20 and 21.
- ⑦ Part is available separately, and is also included with the Cartridge Service Kit. See Page 12.
- In the separately of the separately. See Table on Page 12.
- * Removal of this part may cause permanent damage to the valve.

Thermostatic Expansion Valves Types BQ, SBQ and EBQ

| | BQ VALVE BODY | |
|--|--------------------------------|----------------|
| VALVE TYPE | STANDARD CONNECTIONS Inches | ITEM NUMBER |
| | Inlet x Outlet | |
| BQ. | 1/4" x 3/8" SAE | 168192 |
| Internally | 1/4" x 1/2" SAE | 168191 |
| Equalized | 3/8" x 1/2" SAE | 168190 |
| BQE | 1/4" x 3/8" x 1/4" SAE | 168185 |
| Externally | 1/4" x 1/2" X 1/4" SAE | 168184 |
| Equalized | 3/8" x 1/2" x 1/4" SAE | 168183 |
| SBQ Internally Equalized | 3/8" x 1/2" ODF | 168193 |
| SBQE Externally Equalized | 3/8" x 1/2" x 1/4" ODF | 168198 |
| | 1/4" x 3/8" ODF | 168033 |
| EBQ* | 1/4" x 1/2" ODF | 168051 |
| Internally | 3/8" x 1/2" ODF | 168194 |
| Equalized | 3/8" x 5/8" ODF | 168313 |
| | 1/2" x 5/8" ODF | 168314 |
| | 1/4" x 3/8" x 1/4" ODF | 168035 |
| EDOF* | 1/4" x 1/2" x 1/4" ODF | 168051 |
| EBQE* | 3/8" x 1/2" x 1/4" ODF | 168186 |
| Externally Equalized | 3/8" x 5/8" x 1/4" ODF | 168189 |
| | 1/2" x 5/8" x 1/4" ODF | 168187 |
| | 1/2" x 7/8" x 1/4" ODF | 168188 |

* The straight extended connections of the EBQ body series are designed for easy installation on air conditioning applications. The longer connections and resulting body configurations do not allow it to be packaged in the BQ Carrying Case. All EBQ and EBQE bodies are supplied with an inlet strainer; Item No. 908014, P/N 877-003 (3/8 ODF) or Item No. 908012, P/N 877-004 (1/2 ODF).

- ① Replacement part **not** available.
- ② Part is not available separately, but is included with the Bottom Cap Assembly Kit. See Page 19.
- ③ Part is available separately. See Table on this Page.
- ④ Part is available separately. Specify Thermostatic Charge and Valve Type.
- (5) Part is available separately, see Table on Page 12, and is also included with the Bottom Cap Assembly Kit. See Page 19.
- For Replacement Elements. See Pages 20 and 21.
- ⑦ Part is available separately, and is also included with the Cartridge Service Kit. See Page 12.
- (a) Part is available separately. See Table on Page 12.
- + Removal of this part may cause permanent damage to the valve.

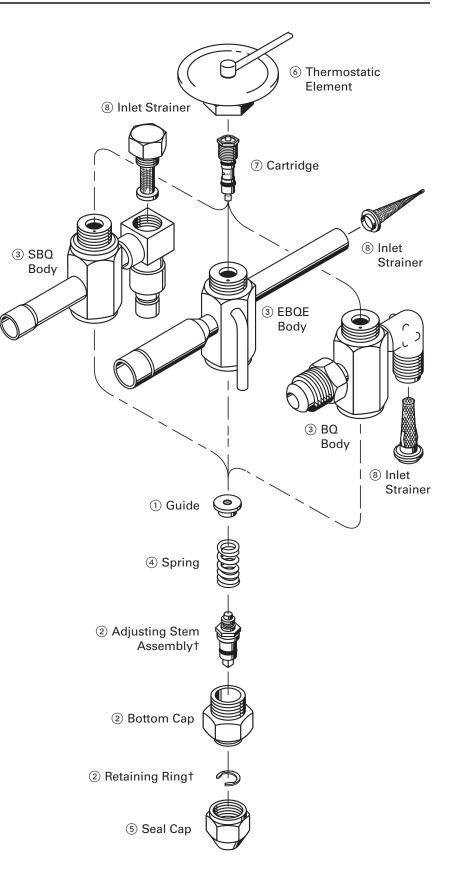

Thermostatic Expansion Valves Flanged

| ITEM | | PART NUMBER and DESCRIP | | VALVE TYPE and QUANTITY OF PART REQUIRED PER VALVE | | | | | | | |
|----------|----------|--------------------------------|-----------------|---|--------|--------|---|--------|----|--|--|
| NUMBER | | DRAWINGS ON PAGES 17 an | | Н | М | V | W | A† | D† | | |
| **** † | 106-001 | | | | | | | 1 | 1 | | |
| 183620 | 123-002 | Bottom Cap Gasket | | | 1 | 1 | | | | | |
| 183625 | 123-005 | | | | | | 1 | | | | |
| 183890 † | 358-000 | – Bottom Cap Locknut | | 1 | 1 | | 1 | | | | |
| **** | 958-000 | | | | | | 1 | | | | |
| 183620 | 123-002 | Pushing Cooket | 2 | ** | ** | | | | | | |
| 183750 | 123-000 | – Bushing Gasket | | | 2 | 2 | | | | | |
| 184930 † | 108-000 | | A - 1/8" (20T) | | | | | 1 | | | |
| 184932 † | 108-001 | | A - 5/32" (30T) | | | | | 1 | | | |
| 184934 † | 108-002 | | A - 3/16" (50T) | | | | | 1 | | | |
| 184920 † | 208-001 | Discharge Tube | D - 1/32" (1T) | | | | | | 1 | | |
| 184922 † | 208-002 | Discharge Tube | D - 1/16" (2T) | | | | | | 1 | | |
| 184924 † | 208-000 | | D - 5/64" (5T) | | | | | | 1 | | |
| 184926 † | 208-003 | | D - 7/64" (10T) | | | | | | 1 | | |
| 184928 † | 208-004 | | D - 5/32" (15T) | | | | | | 1 | | |
| **** † | 139-000 | Element Cap Screw | | | | | 2 | | | | |
| **** † | 106-000 | | | | | | 1 | | | | |
| 183635 | 123-001 | Element Gasket | | 1 | 1 | 1 | | | | | |
| **** † | 106-002 | | | | | | | 1 | | | |
| 183745 † | 106-003 | | | | | | | 2 | | | |
| 183746 † | 106-004 | Flange Gasket | | | | | | | 2 | | |
| 183765 | 123-004 | | | | | İ | 2 | | | | |
| **** | 578-000 | | | 1 | | | | | | | |
| 183879 † | 224-000 | Inlet Strainer Ring | | | | | | | 1* | | |
| **** † | 124-000 | | | | | | | 1* | | | |
| **** | 226-000 | Inlet Strainer Screen | | 1 | | | | | | | |
| 183034 † | 1471-000 | | | | | | | 1 | | | |
| 183029 | 763-000 | Inlet Strainer Screen Assy. | | | 1 | 1 | | | | | |
| **** | 735-000 | 1 | | | | | 1 | | | | |
| 183032 † | 3777-000 | Inlet Strainer Screen Assy. | 1 and 2 TON | | | | | | 1 | | |
| 183033 † | 3777-001 | Inlet Strainer Screen Assy. | 5, 10, 15 TON | | | | | | 1 | | |
| **** | 961-000 | Inlet Strainer Screen Retainer | | | | | 1 | | | | |
| 183450 | 360-000 | | 1/2" FPT | | 1 or 2 | 1 or 2 | | | | | |
| 183452 | 360-001 | – Pipe Flange (Female) | 3/4" FPT | | 1 or 2 | 1 or 2 | | | | | |
| 183454 | 362-000 | | 1" FPT | | 1 or 2 | 1 or 2 | | | | | |
| 183456 † | 374-000 | | 1/2" FPT | | | | | 1 or 2 | | | |
| 183458 † | 374-001 | 7 | 3/4" FPT | | | | | 1 or 2 | | | |
| 183460 † | 375-000 | Pine Flange (Male) | 1" FPT | | | | | 1 or 2 | | | |
| 183468 † | 225-000 | Pipe Flange (Male) | 1/4" FPT | 1 or 2*** | | | | | 2 | | |
| 183470 † | 225-001 | | 3/8" FPT | 1 or 2*** | | | | | 2 | | |
| 183472 † | 225-002 | | 1/2" FPT | 1 or 2*** | | | | | 2 | | |

For industrial refrigeration and R-717 applications, please contact Sporlan Division - Refrigeration Business Unit at (708) 681-6300. † *

Used in place of inlet strainer screen when external strainer is used with the valve.

** M and V valves use wolverine style bushing gaskets which are not compatible with ammonia. The gaskets used on the A valve and the MA17 solenoid valve are very similar to the M and V valve bushing gaskets; however this material is compatible with Ammonia. *** Can be added to Type "H" valve with adaptor kit number K-1178.


**** Not available.

Thermostatic Expansion Valves Flanged


| ITEM | | PART NUMBER a | | | | TYPE and Q REQUIRED | | | |
|----------------------|-----------------------|--|----------------------------|----------------------|-------------|------------------------|-------------|------------|------------|
| NUMBER | | DRAWINGS ON F | AGES 17 and 18 | Н | М | V | W | A † | D † |
| 183044 | 3123-000 | | 1/2" Socket Weld | | 1 or 2 | 1 or 2 | | | |
| 183561 | 376-000 | – Socket Flange – (Female) | 3/4" Socket Weld | | 1 or 2 | 1 or 2 | | | |
| 183046 | 3146-000 | (i ciliaic) | 1" Socket Weld | | 1 or 2 | 1 or 2 | | | |
| 183558 †‡ | 580-000 | | 1/2" Socket Weld | 1 or 2 | | | | | 1 or |
| 183040 † | 3122-000 | Cooket Flange (Male) | 1/2" Socket Weld | | | | | 1 or 2 | |
| 183560 † | 377-000 | Socket Flange (Male) | 3/4" Socket Weld | | | | | 1 or 2 | |
| 183042 † | 3147-000 | | 1" Socket Weld | | | | | 1 or 2 | |
| 183421 | 129-000 | | | 2 | 2 | | | 2 | 2 |
| 183423 | 729-000 | Pushrod Packing | | | | 1 | | | |
| 183425 | 737-000 | | | | | | 1 | | |
| **** † | 128-000 | | | | | | | 2 | 2 |
| 183422 | 128-001 | 1 | | 2 | 2 | | | | |
| 183424 | 728-000 | Pushrod Packing Nut | | | | 1 | | | |
| 183426 | 736-000 | 1 | | | | | 1 | | |
| 183880 | 220-000 | | | 1 | | | | | |
| 183882 † | 220-001 | Seal Cap | | | 1 | 1 | | 1 | 1 |
| 183886 | 720-000 | | | | | | 1 | | |
| 183606 | 621-017 | Seal Cap O-Ring | | 1 | | | • | | <u> </u> |
| 183104 | 123-003 | | | | | | 1 | | |
| 183825 † | 106-005 | – Seal Cap Gasket | | 1** | 1 | 1 | | 1 | 1 |
| 183036 | 574-001 | | 1/2" ODF | 1 or 2 | 1 | | | 1 | <u> </u> |
| 183037 | 574-002 | | 5/8" ODF | 1 or 2 | | | | | |
| 183047 | 367-001 | | 7/8" ODF | 1012 | 1 or 2 | 1 or 2 | | | <u> </u> |
| 183039 | 574-004 | - | 7/8″ ODF | 1 or 2 | 1012 | 1012 | | | |
| 183049 | 368-000 | Solder Bushing | 1-1/8" ODF | 1012 | 1 | 1 | | | |
| | | - | | 1 0 | 1 or 2 | 1 or 2 | | | |
| 183041 | 575-000 | _ | 1-1/8" ODF | 1 or 2 | | 1 0 | | | <u> </u> |
| 183053 | 368-001 | _ | 1-3/8" ODF | | 1 or 2 | 1 or 2 | | | <u> </u> |
| 183055 | 370-000 | | 1-5/8" ODF | | 1 or 2 | 1 or 2 | | | <u> </u> |
| 183057 | 576-000 | _ | 3/8" thru 7/8" ODF | 1 or 2 | | | | | <u> </u> |
| 183061 | 361-000 | _ | 7/8" ODF | | 1 or 2 | 1 or 2 | | | |
| 183063 | 361-001 | _ | 1-1/8" ODF | | 1 or 2 | 1 or 2 | | | <u> </u> |
| 183059 | 577-000 | _ | 1-1/8" ODF | 1 or 2 | | | | | <u> </u> |
| 183069 | 742-000 | Solder Flange | 1-1/8" ODF* | | | 1 0 | 1 or 2 | | <u> </u> |
| 183065 | 363-000 | 4 | 1-3/8" ODF | | 1 or 2 | 1 or 2 | 1 0 | | |
| 183071 | 742-001 | 4 | 1-3/8" ODF* | | 1.0 | 1 - 0 | 1 or 2 | | |
| 183067 | 364-000 | 4 | 1-5/8" ODF | | 1 or 2 | 1 or 2 | 1 | | |
| 183073 | 742-002 | - | 1-5/8" ODF* 2-1/8" ODF* | | | | 1 or 2 | | |
| 183075 **** † | 742-003 *** | Spring | 2-1/0 UDF" | 1 | 1 cr 2 | 1 or 2 | 1 or 2 | 1 cr 2 | 1 |
| | | Spring | | | 1 or 2 | 1 or 2 | 1 | 1 or 2 | 1 |
| 183106 † **** | 113-000 213-xxx*** | - | | 1 | 1 | 1 | | 1 | |
| | 956-000 | Spring Guide | | 1 | | | 4 | | |
| **** | | | | | | | 1 | | |
| - | | | | | | | | | 1 |
| Can be a Flange a | dded to Type | ration and R-717 applicatio e "H" Valve with Adapter Ki are one part. Jufactured prior to March 1 | | ision - Refrigeratio | on Business | s Unit at (70 | 08) 681-630 | 0. | |

Thermostatic Expansion Valves **Types H and M**

See Parts Table on Page 15 or 16

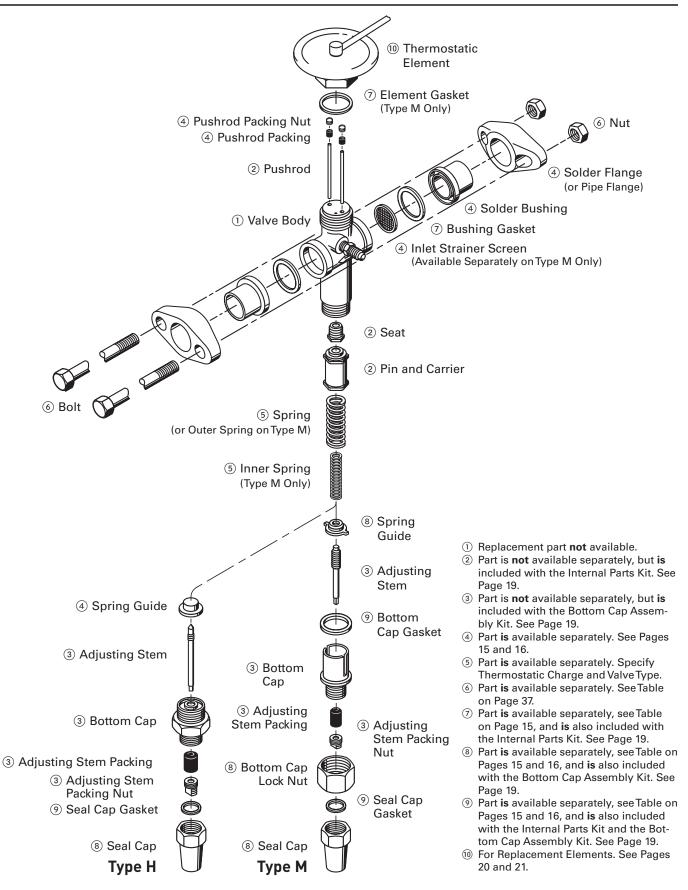

Thermostatic Expansion Valves **Types V and W**

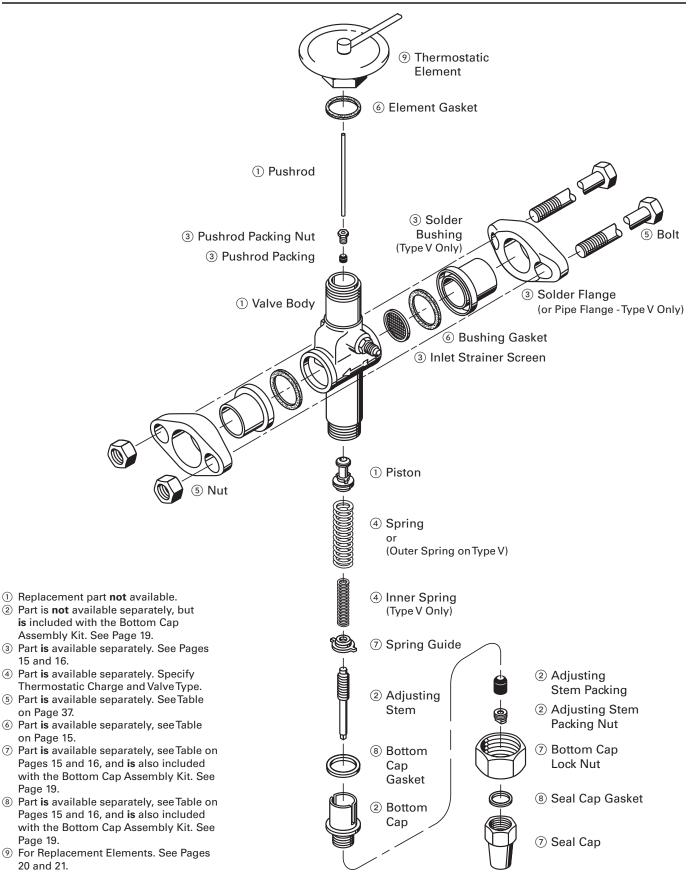

Thermostatic Expansion Valves Replacement Parts Kits

INTERNAL PARTS KITS FOR CURRENT VALVE TYPES

| VALVE TYPE | INTERNAL or EXTERNAL EQUALIZER | | INAL CAP/ of Refrige | KIT No. | ITEM |
|---------------|--------------------------------------|-------------|-------------------------|-------------------|---------|
| | | 12, 134a | 22 | 404A, 502, 507 | KIT NO. |

The following Kits contain: 1 Seat, 1 Pin & Carrier, 2 Pushrods, Pushrod Gauge. Type G valves with external equalizer, Type S valves dated B69 or later and Type C valves dated C70 or later have packless pushrod construction. The following internal parts kits may be used with packless valves.

| | - | | | | | |
|--|---|-----------|--------|-------|--|--------|
| | | 1/4 | 1/2 | 1/4 | KP01-0002 | 183189 |
| G | Internel | 1/2 | 1 | 1/2 | KP01-0005 | 183191 |
| G | Internal | 1 | 1-1/2 | 1 | KP01-0010 | 183193 |
| | | 1-1/2 | 2-1/2 | 1-1/2 | I/2 KP01-0005 1 KP01-0010 -1/2 KP01-0015 1 KP02-0010 -1/2 KP02-0015 2 KP02-0020 3 KP03-0025 4 KP03-0025 4 KP02-0020 6 KP02-0030 6 KP02-0050 1/2 KP02-0050 1/2 KP02-0010 -1/2 KP02-0015 2 KP02-0020 3 KP03-0025 4 KP02-0010 -1/2 KP02-0010 -1/2 KP02-0020 3 KP03-0025 4 KP03-0020 3 KP03-0020 4 KP03-0030 KP02-0050 KP02-0050 7 KP02-0050 | 183195 |
| | External | 1 | 1-1/2 | 1 | KP02-0010 | 183201 |
| | External | 1-1/2 | 2 | 1-1/2 | KP02-0015 | 183203 |
| | External | 2 | 3 | 2 | KP02-0020 | 183205 |
| C Internal 2-1/2 4 External 3 5 External 6 8 | 2 | KP03-0025 | 183225 | | | |
| | External | 2-1/2 | 4 | 3 | KP02-0025 | 183207 |
| | Internal | <u></u> | 5 | 4 | KP03-0030 | 183227 |
| | External | 3 | | 4 | KP02-0030 | 183209 |
| | External | 6 | 8 | 6 | KP02-0050 | 183211 |
| | External | 1/2 | 1 | 1/2 | KP02-0005 | 183199 |
| | External | 1 | 1-1/2 | 1 | KP02-0010 | 183201 |
| | $ \begin{array}{c c c c c c c c c c c c c c c c c c c $ | KP02-0015 | 183203 | | | |
| | External | 2 | 3 | 2 | KP02-0020 | 183205 |
| s | Internal | 2 1/2 | 4 | 2 | KP03-0025 | 183225 |
| 3 | External | 2-1/2 | 4 | 3 | KP02-0025 | 183207 |
| | Internal | 2 | E | 4 | KP03-0030 | 183227 |
| | External | 3 | 5 | 4 | KP02-0030 | 183209 |
| | External | 5 | 8 | 6 | KP02-0050 | 183211 |
| | External | 6 | 10 | 7 | KP02-0060 | 183213 |
| T I (11 | · 1/1 | | | | | 1.0 |

The following Kits contain: 1 Seat, 1 Pin & Carrier, 2 Pushrods, 1 Seal Cap Gasket, Pushrod Gauge.

| | Internal | 4 | 7 | 4 | KP12-0040 | 183259 |
|---|----------|----|----|-------|-----------|--------|
| P | or | 5 | 11 | 6-1/2 | KP12-0050 | 183261 |
| Г | External | 8 | 16 | 9 | KP12-0080 | 183263 |
| | External | 12 | 20 | 12 | KP12-0120 | 183265 |

| | BOTTOM CAP ASSEMBLY KITS FOR THERMOSTATIC EXPANSION VALVES | | | | | | | | |
|---|---|-------------|---|--|--|--|--|--|--|
| VALVE TYPE | BOTTOM CAP ASSEMBLY KIT NUMBER | ITEM NO. | DESCRIPTION OF CONTENTS | | | | | | |
| (E)G, EBS, C, (E)MC, S | KA-8 | 183011 | 1 Adjustment Assembly | | | | | | |
| P, H, U | KA-3 | 183005 | 1 Spring Guide, 1 Seal Cap 1 Seal Cap Gasket (KA-3) | | | | | | |
| BBI (small), ER (small), (E)F, (E)BF, SBF, (E)Q, SQ, (E)BQ, SBQ, FB, R, SR | KA-4 | 183006 | 1 Adjustment Assembly 1 Seal Cap | | | | | | |
| RC, ER (large), BBI (large), CBI*, CBBI* | KA-Y1132 | 183048 | | | | | | | |
| M, V, K | KA-6 | 183009 | 1 Adjustment Assembly 1 Spring Guide, 1 Seal Cap 1 Bottom Cap Gasket (except KA-2) | | | | | | |
| W | KA-7 | 183010 | 1 Bottom Cap Locknut (except KA-2) 1 Seal Cap Gasket | | | | | | |

INTERNAL PARTS KITS FOR CURRENT VALVE TYPES

| VALVE | INTERNAL or EXTERNAL | | | L CAPACI efrigerati | | KIT No. | ITEM |
|-------|-------------------------|-------------|----|------------------------|------|---------|------|
| TYPE | EQUALIZER | 12, 134a | 22 | 404A, 502, 507 | 410A | KIT NO. | No. |

The following Kits contain: 1 Seat, 1 Pin & Carrier, 2 Pushrods, 2 Bushing Gaskets, 1 Seal Cap Gasket, Pushrod Gauge.

| | Internal or | 1-1/2 | 2-1/2 | 1-1/2 | — | KP13-0015 | 183267 |
|---|-------------|-------|-------|-------|---|-----------|--------|
| | | 3 | 5-1/2 | 3 | — | KP13-0030 | 183269 |
| н | External | 4 | 7 | 4 | — | KP13-0040 | 183271 |
| п | External | 5 | 11 | 6-1/2 | | KP13-0050 | 183273 |
| | | 8 | 16 | 9 | | KP13-0080 | 183275 |
| | External | 12 | 20 | 12 | — | KP13-0120 | 183277 |

The following Kits contain: 1 Pushrod and Seal Assembly, Piston, Bottom Cap Adjustment Assembly, Pushrod Gauge, and set of instructions.

For Type 0 Valves with 83 or 85 elements; replacement piston will have extra seal and will allow the valve to work in bi-directional applications.

| | | | — | — | | 20 | KP19-0060 | 183285 |
|---|----|----------|----|----|----|----|-----------|--------|
| | 85 | | — | — | — | 25 | KP19-0090 | 183287 |
| | | | — | _ | — | 35 | KP19-0160 | 183291 |
| | | | 6 | 10 | 6 | | KP19-0060 | 183285 |
| 0 | 83 | External | 9 | 15 | 9 | | KP19-0090 | 183287 |
| 0 | 03 | External | 12 | 20 | 12 | — | KP19-0120 | 183289 |
| | | | 16 | 30 | 21 | — | KP19-0160 | 183291 |
| | | | 23 | 40 | 30 | — | KP20-0230 | 183293 |
| | 33 | | 32 | 55 | 35 | | KP20-0320 | 183295 |
| | | | 40 | 70 | 45 | _ | KP20-0400 | 183297 |

The following Kits contain: 1 Seat, 1 Pin & Carrier, 2 Pushrods; the following gaskets: 1 Element, 2 Bushings, 1 Bottom Cap, 1 Seal Cap, Pushrod Gauge.

| | | 7-1/2 | 12 | 9 | — | KP08-0075 | 183231 |
|-----|----------|-------|----|----|---|-----------|--------|
| | | 11 | 18 | — | | KP08-0110 | 183233 |
| М | External | 13 | 21 | 15 | | KP08-0130 | 183235 |
| IVI | External | 15 | 26 | 20 | — | KP08-0150 | 183237 |
| | | 20 | 34 | 25 | — | KP08-0200 | 183239 |
| | | 25 | 42 | 30 | — | KP08-0250 | 183241 |

The following Kits contain: 1 Element Gasket, 2 Bushing Gaskets, 1 Bottom Cap Gasket, 1 Seal Cap Gasket, 1 Pushrod, 1 Pushrod Gauge, 1 Piston Assembly, 1 Seat Refinishing Tool with Grit Cloth, 1 Set of Instructions. These Kits are for use with V Valves dated B65 or later and for W Valves dated A66 or later. See Bulletin 210-40-2.

| | | 35 | 52 | 38 | _ | KP16-0350 | ** |
|----|----------|-----|-----|-----|---|------------|-------|
| V | External | 45 | 70 | 50 | — | KP16-0450 | ** |
| | | 55 | 100 | 70 | — | KF 10-0400 | ** |
| w | Extornal | 80 | 135 | 100 | — | KP17-0800 | ~ ~ ~ |
| vv | External | 110 | 180 | 130 | _ | KF17-0800 | ** |
| | | | | | | | |

** Parts kits for Type V and Type W valves are no longer available.

REFRIGERANT 717 (Ammonia)

The following Kits contain: 1 Seat, 1 Pin & Carrier, 2 Pushrods; the following gaskets: 1 Element, 2 Flanges, 1 Bottom Cap, 1 Seal Cap, Pushrod Gauge.

| 3 | | | | | | |
|----|----------|--------|-----------|---|--|--|
| | Internal | 1, 2 | KP10-0010 | † | | |
| D† | or | 5 | KP10-0050 | † | | |
| | External | 10, 15 | KP10-0100 | † | | |
| | Internal | 20, 30 | KP09-0200 | † | | |
| A† | or | 50, 75 | KP09-0500 | † | | |
| | External | 100 | KP09-1000 | † | | |

+ For industrial refrigeration and R-717 applications, please contact Sporlan Division - Refrigeration Business Unit at (708) 681-6300.

* For TEVs with straight through connections only.

Thermostatic Expansion Valves Identifying Sporlan TEVs

To completely identify a SPORLAN Thermostatic Expansion VALVE the following

information is required: 6 - Ibid Type of valve (body style) (1)(2) Refrigerant 8 ③ External equalizer ④ Capacity in tons of refrigerant or port size 5 Type of Thermostatic Charge Thermostatic bulb size if other (6) 1 than standard 2 7 Suffix letters - if any - indicate permanent bleed port or Rapid Type G Pressure Balancer construction 8 (All valves except Type A & D) 8 Inlet and outlet connection sizes (9) and style (5) 8 (9) Capillary tubing length 8 (10) Prefix letters or numbers if any **Pin Printing** 123**700** `IF--1 3 9.0 34217 Type M Date

Code*


To completely identify a SPORLAN Thermostatic ELEMENT the following information is required:

- A Element size number
- B Refrigerant

Air Test Setting

- Thermostatic Charge (C)
- MOP (Maximum Operating D Pressure) if other than standard
- Œ Capillary tubing length
- Bulb size if other than standard (F)

| | Refrigerant Designation, Letter and Color Code Used on Decals | | | | | |
|---|--|-------------------------------|--|--|--|--|
| Н | R-11 | Blue (Prior to 26516) | | | | |
| F | R-12 | Yellow | | | | |
| E | R-13 | Blue | | | | |
| Т | R-13B1 | Blue | | | | |
| V | R-22 | Green | | | | |
| G | R-23 | Blue | | | | |
| Н | R-32 | White (26516 & Later) | | | | |
| В | R-114 | Blue | | | | |
| Q | R-124 | Green | | | | |
| J | R-134a | Blue | | | | |
| Х | R401A | Coral | | | | |
| L | R-402A | Sand | | | | |
| S | R-404A | Orange | | | | |
| Z | R-410A | Pink | | | | |
| D | R-448A/449A | Blue/White (00116 & Later) | | | | |
| D | R-500 | Orange (Prior to 00116) | | | | |
| R | R-502 | Purple | | | | |
| W | R-503 | Blue | | | | |
| Р | R-507 | Teal | | | | |
| А | R-717 | White | | | | |

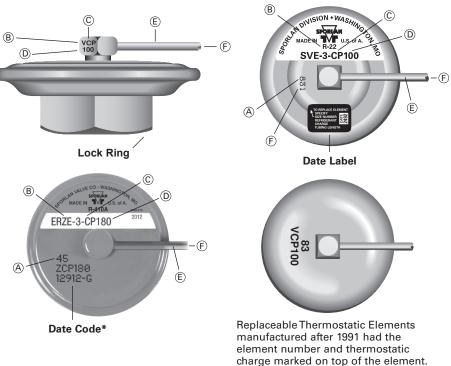

(5)

(8)

(4)

(4)

Type D

Type S

*Date Codes: 5 digit date codes such as 34217 indicate a day/year. This would be the 342nd day of 2017. 4 digit date codes such as 4316 indicate a week/year. This would be the 43rd week of 2016.

Thermostatic Expansion Valves Identifying Sporlan TEVs

Table A

| THERMOSTATIC ELEMENT KITS‡ Specify Refrigerant, Thermostatic Charge & Tubing Length | | | | | | | |
|--|---------------------|--------------|--|--|--|--|--|
| CURRENT VA | CURRENT VALVE TYPES | | | | | | |
| VALVE TYPE | KIT NUMBER | KIT CONTENTS | | | | | |
| A† | KT-12† | | | | | | |
| D† | KT-23 [†] | \cup | | | | | |
| P, H, O Large | KT-33 | | | | | | |
| O Large (R-410A) | KT-85-3 | | | | | | |
| BBI Small, (E)Q, SQ, (E)BQ, SBQ, (E)F, (E)BF, SBF, ER Small, RC | KT-43 | | | | | | |
| BBI Small, (E)BQ, SBQ, ER Small, RC (R-410A) | KT-45 | (2) | | | | | |
| ER Large, BBI Large | KT-45-5 | | | | | | |
| (E)G, X, (E)MC | KT-53 | | | | | | |
| M, V, W Small | KT-63 | (1) | | | | | |
| W Large | KT-7 | \cup | | | | | |
| C, S, EBS, O Small | KT-83 | (2) | | | | | |
| 0 Small (R-410A) | KT-85 | Z | | | | | |

0 1Thermostatic Element, 2 Bulb Clamps, 1Top Gasket, Instruction Bulletin.

(2) 1Thermostatic Element, 2 Bulb Clamps, Instruction Bulletin.

F Replacement of the thermostatic element requires a wrench commonly referred to as a pump wrench.

Table B

| RECOM | RECOMMENDED REPLACEMENT THERMOSTATIC CHARGES | | | | | | | |
|-------------|--|---|--|--|--|--|--|--|
| REFRIGERANT | AIR CONDITIONING Or Heat Pump | COMMERCIAL REFRIGERATION +50 °F to -10 °F | LOW TEMPERATURE Refrigeration 0 °F to -40 °F | EXTREMELY LOW TEMPERATURE REFRIGERATION -40°F to -100°F | | | | |
| 12 | FCP60 | FC | Z, FZP | _ | | | | |
| 22 | VCP100, VGA | VC | VZ, VZP40 | VX | | | | |
| 134a | JCP60 | JC | _ | — | | | | |
| 401A | XCP60 | XC | _ | — | | | | |
| 402A | — | LC | LZ, LZP | LX | | | | |
| 404A | SCP115 | SC | SZ, SZP | SX | | | | |
| 448A | VGA | VC | VZ, VZP40 | VX | | | | |
| 449A | VGA | VC | VZ, VZP40 | VX | | | | |
| 410A | ZCP180, ZGA | _ | _ | — | | | | |
| 502 | RCP115 | RC | RZ, RZP | RX | | | | |
| 507 | — | PC | PZ, PCP | PX | | | | |

The Sporlan Type ZP thermostatic charges have essentially the same characteristics as the conventional Z cross charges with one exception. They produce a pressure limit or MOP. The ZP charges are not intended as replacements for the Z charges -- they should only be used where a definite pressure limit is required to prevent motor overloading.

A conventional Type L liquid charge is also available for all commonly used refrigerants in most of our element sizes.

Further identification of the element is provided by the use of two or three letters and sometimes two or three numbers stamped on the capillary button of the diaphragm case. The first letter indicates the refrigerant and the second letter (and third if used) the selective charge of the element. Numbers, if used, indicate a special MOP or maximum operating pressure. The Selective Charges C, CP, JC, Z, ZP, VGA, L and X are generally applied in the range of temperatures shown in the Table B.

A Type VCP, Refrigerant 22 air conditioning or heat pump charge with a 100 psig limit is stamped "VCP100".

Table C

| GA, CP, and ZP CHARGED VALVES Table C lists the standard Type "P" charge MOPs. | | | | | | | |
|---|-------------------------|------------------------------|-------------------|--|--|--|--|
| REFRIGERANT | THERMOSTATIC CHARGE* | MOP-PSIG Factory air test | NOMINAL System | | | | |
| 12 | FCP60 | 60 | 50 | | | | |
| 12 | FZP | 20 | 12 | | | | |
| | VGA | 110 | 100** | | | | |
| 22 | VCP100 | 100 | 90 | | | | |
| 22 | VZP40 | 40 | 30 | | | | |
| | VZP | 30 | 20 | | | | |
| 134a | JCP60 | 60 | 50 | | | | |
| 401A | XCP60 | 60 | 50 | | | | |
| 402A | LZP | 45 | 35 | | | | |
| 4044 | SCP115 | 115 | 105 | | | | |
| 404A | SZP | 45 | 35 | | | | |
| 410A | ZGA | NI/A | 200** | | | | |
| 410A | ZCP180 | N/A | 170 | | | | |
| 500 | RCP115 | 115 | 105 | | | | |
| 502 | RZP | 45 | 35 | | | | |
| 507 | PZP | 45 | 35 | | | | |

* A numeric suffix on a thermostatic charge designation indicates a special MOP. Omission of the number indicates standard MOP as shown.

** Not as well defined as the other Type "P" charges listed in this table.

Table D

| T | | P KITS FOR PANSION VALVE | S |
|------------------------|---------------------------|-----------------------------|----------------|
| VALVE TYPE | R-22** NOMINAL Tonnage | KIT NUMBER | ITEM NUMBER |
| А | R-717 20 thru 100 | KT-131-E | 183358 |
| BF* | AAA thru C | KT-131-A | 183350 |
| С | 4 thru 8 | KT-131-B | 183352 |
| D | R-717 1 thru 15 | KT-131-E | 183358 |
| EBF* | AAA thru C | KT-131-A | 183350 |
| EBS | 8 thru 20 | KT-131-C | 183354 |
| EG* | 1/5 thru 3 | | |
| F* | 1/4 thru 3 | KT-131-A | 183350 |
| G* | 1/5 thru 3 | | |
| Н | 2-1/2 thru 20 | KT-131-C | 183354 |
| М | 21 thru 34 | KI-131-0 | 103304 |
| М | 42 | KT-131-D | 183356 |
| NI | 1/4 thru 1 | KT-131-A | 183350 |
| O Large | 40 thru 70 | KT-131-D | 183356 |
| 0 Small | 15 thru 30 | KT-131-C | 183354 |
| Р | All | NI-131-6 | 183354 |
| RI | 2 thru 5 | | |
| ER Small, R, SR, RC | 1 thru 8 | KT-131-B | 183352 |
| ER Large | 10 thru 12 | KT-131-C | 183354 |
| S | 2 thru 5 | KT-131-B | 183352 |
| S | 8 thru 15 | KT-131-C | 183354 |
| SBF* | AAA thru C | KT-131-A | 183350 |
| V | 52 thru 100 | KT-131-D | 183356 |
| W | 135 & 180 | N1-131-D | 103300 |

For applications with an external equalizer use kit number KT-131-B.
 ** The R-22 nominal tonnage is used as a reference except as noted.

Hex bolt for bulb strap Item No. 183502, P/N 20032-000 Nut for bulb strap Item No. 183504, P/N 20033-000

† For industrial refrigeration and R-717 applications, please contact Sporlan Division - Refrigeration Business Unit at (708) 681-6300.

Thermostatic Expansion Valves **Accessories**

Stainless Steel Bulb Clamp Kits

| ITEM | PART NUMBER | BULB DIAMETER | S | UCTION LIN Inches | | :R |
|--------|----------------------------------|------------------|-----------------|----------------------|-----------------|-----------------|
| NUMBER | and DESCRIPTION | Inches (mm) | 5/8" (16 mm) | 3/4" (19 mm) | 7/8" (22 mm) | 1″ (25.4 mm) |
| 183553 | KIT 22721-000 SSCLMP 1/2DOUBL | 1/2" (12.7 mm) | - | - | 1 | 1 |
| 183445 | KIT 6744-000 SSCLMP 3/4W/INS | 3/4" (19.0 mm) | 1 | 1 | 1 | - |


*Bulbs with lengths \geq 2.5" (63.5 mm) require two clamps.

Strainer Modifications

| | STRAINER DESIGN MODIFICAT | IONS (PART NUMBER 3427-000) | |
|---|--|---|---|
| MANUFACTURED PRIOR TO 2294 date code | MANUFACTURED AFTER 2294 DATE CODE | 1998 DESIGN MODIFICATION | 2003 DESIGN MODIFICATION† |
| | | | |
| 1/2" hex brass and 3/8-32 thread for the "EG" valve. (P/N 1935-000) | 5/8" hex brass and 1/2-20 thread for the "EG" and other TEVs manufac- tured on and after date code 2294. | Increased length of hex to ease installation. | Increased length of screen and brass sleeve assembly. |
| Replaced by Item Number 183378 | | Replaced by Item Number 183002 | |

The inlet fitting on valve types SBF, SBQ, and SFB was modified in 2008 to ease installation. No change to strainer was made at that time.

Solenoid Valves X Rapid Cycle Series

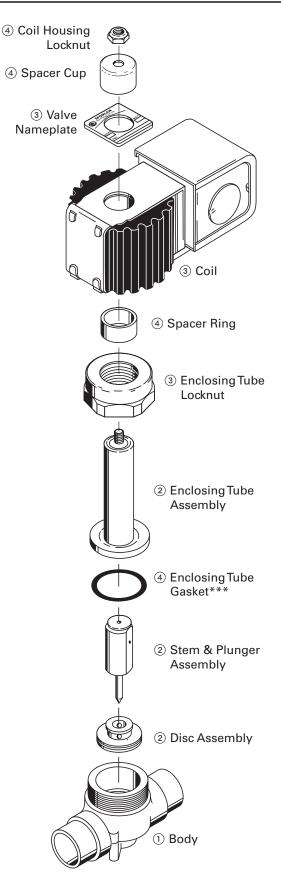

| ITEM NUMBER | | NUMBER and CRIPTION | VAL | | E and C DUIRED | | | PART |
|----------------|----------|------------------------|-------|----------|-------------------|---------------|---|-------|
| NUMBER | DES | OCKIPTION | XWG | XXF | XUP* | XRN* | N* XRM* XP | |
| 382009 | 1025-7 | Coil Housing | 1 | 1 | 1 | | | |
| 382005 | 1025-1 | Locknut | | | | 1 | 1 | 1 |
| 382145 | 13128-2 | | | | | | 1 | |
| 382150 | 13252-1 | Enclosing Tube | | | | 1 | | |
| 382155 | 13256-2 | Locknut | | 1 | 1 | | XRM* XPO* 1 1 | |
| 382165 | 13552-1 | | | | | | | 1 |
| 380103 | 14000-1 | | | 1 | 1 | | | |
| 380104 | 14000-2 | Enclosing Tube | | | | 1 | | |
| 380100 | 14000-3 | Gasket*** | | | | | 1 | |
| 380101 | 14000-4 | | | | | | | 1 |
| 382008 | 14115 | Valve Nameplate | Speci | fy valve | e type, v | , /oltage, | & freq | uency |
| 382036 | 2371-13 | | | | | | | 1 |
| 382060 | 2371-16 | | | | | 1 | | |
| 382011 | 2371-24 | Spacer Ring | | | | | 1 | |
| 382012 | 15583-1 | | | 1 | 1 | | | |
| 382025 | 15583-2 | | 1 | | | | | |
| 382033 | 15582-4 | Spacer Cup | 1 | 1 | 1 | | | |
| 382014 | 2717-7 | Spacer Cup | | | | 1 | 1 | 1 |
| _ | OMKC-1** | Coil | 1 | 1 | 1 | | | |
| _ | OMKC-2** | COIL | | | | 1 | 1 | 1 |

Valves with the suffix "-1, -2, -3" etc. use the same parts.

** Specify Voltage and Frequency.

*** See Table below regarding part numbers for the enclosing tube gasket and the new wolverine gasket.

| ltem Number | New Style Wolverine Gasket | ltem Number | Old Style Tetraseal Gasket |
|----------------|----------------------------------|----------------|----------------------------------|
| 380103 | 14000-1 | 183655 | 641-1 |
| 380104 | 14000-2 | 183660 | 641-3 |
| 380100 | 14000-3 | 183665 | 641-4 |
| 380101 | 14000-4 | 183670 | 641-5 |
| 380102 | 14000-5 | 183675 | 2645-000 |
| 382653 | 14000-9 | — | — |

B and E series Solenoid Valves have been redesigned. The new design can be easily identified as a thin, synthetic coated metal gasket, known as a Wolverine gasket. The old gasket is a thicker type of O-ring with a square cross section, known as a tetraseal. See the partial cross section of the valve body above.


The gaskets and the enclosing tubes of the two designs are not interchangeable. The new enclosing tube assembly is included in the replacement parts kit. Page 36.

- ① Replacement part **not** available.
- ② Part is **not** available separately, but **is** included with the Disc Parts Kit. See Page 35.
- ③ Part is available separately. See Table above.
- ④ Part is available separately, and is included with the Disc Parts Kit. See Page 35.

Solenoid Valves W, R and XOF/XJH Industrial Series

| | | INDUSTRIAL | SOLENOI | D VALVE | REPLAC | EMENTI | PARTS | | | | |
|--------|----------|-------------------------------------|---------|---------|------------|--------------|-------------|-------------|-----------|------|---------|
| ITEM | D/ | ART NUMBER and DESCRIPTION | | VA | LVE TYPE a | nd QUANT | ITY OF PAI | RT REQUIR | ED PER VA | LVE | |
| NUMBER | UMBER P/ | ANT NOWIDEN AND DESCRIPTION | W3 | W6 | W14 | W19 | W25 | R183 | R184 | R246 | XOF/XJH |
| 382270 | 2071-3 | | | | | | | 4 | | | |
| 382016 | 13444-1 | Closing Spring | | | 1 | | | | | | |
| 382175 | 13683-1 | Closing Spring | | | | 1 | 1 | | | | |
| 958101 | 1390-000 | Coil Housing Screw | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| 382008 | 14115 | Valve Nameplate | | | Spec | ify valve ty | pe, voltage | , and frequ | iency | | · |
| 183715 | 1328-14 | | 1 | | | | | | | | |
| 183611 | 621-15 | Enclosing Tube O-Ring | | | | | | | | | 1 |
| 183605 | 638-132 | | | | | | | 1 | 1 | 1 | |
| 380103 | 14000-1 | | | 1 | | | | | | | |
| 380100 | 14000-3 | Fuelesian Tube Coelest* | | | 1 | | | | | | |
| 380101 | 14000-4 | Enclosing Tube Gasket* | | | | 1 | | | | | |
| 380102 | 14000-5 | | | | | | 1 | | | | |
| 382145 | 13128-2 | | | | 1 | | | | | | |
| 382155 | 13256-2 | Factorian Take Laskaut | | 1 | | | | | | | |
| 382165 | 13552-1 | Enclosing Tube Locknut | | | | 1 | | | | | |
| 382170 | 13681-1 | | | | | | 1 | | | | |
| 382017 | 15052-4 | Flange Plate Bolt | | | | | | 4 | 4 | 4 | |
| — | MKC-1 | Cail (ana ait walta sa 8 fraswanaw) | 1 | 1 | | | | 1 | 1 | 1 | 1 |
| _ | MKC-2 | Coil (specify voltage & frequency) | | | 1 | 1 | 1 | | | | |

* See Table on Page 23 regarding part numbers for the enclosing tube gasket and the new wolverine gasket.

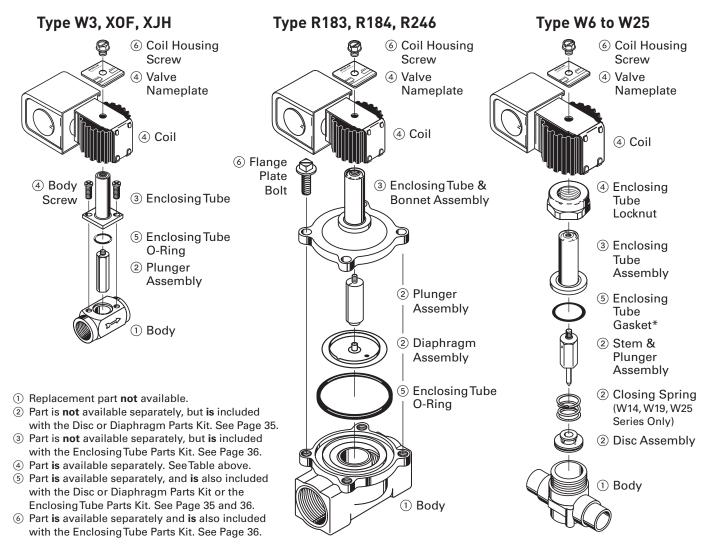

35**

43***

42*


VALVE TYPE and QUANTITY OF PART

REQUIRED PER VALVE

19 25

E10S2 14

Solenoid Valves Normally Closed Series

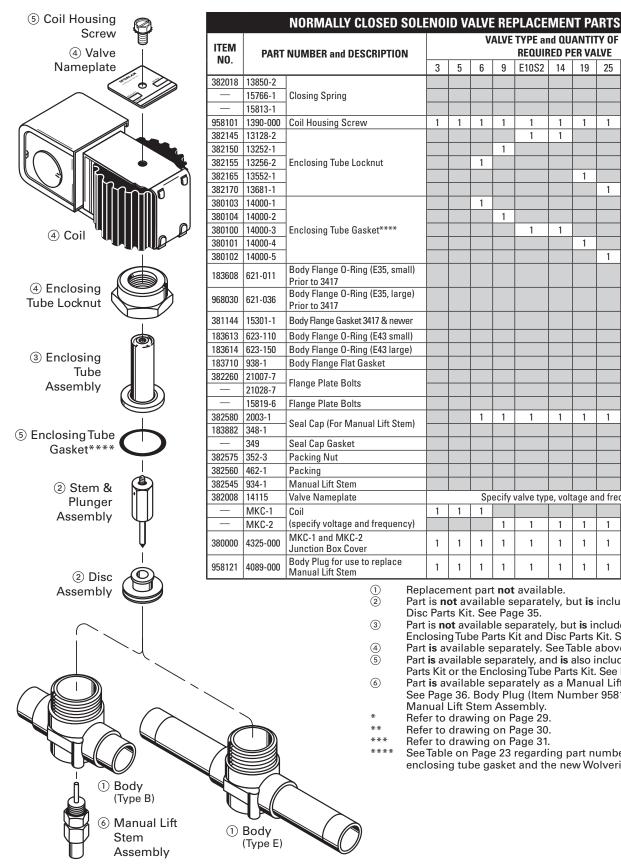

Specify valve type, voltage and frequency

Replacement part not available.

Part is not available separately, but is included with the Disc Parts Kit. See Page 35.

Part is not available separately, but is included with the Enclosing Tube Parts Kit and Disc Parts Kit. See Page 35 & 36. (4) Part is available separately. See Table above.


Part is available separately, and is also included with the Disc Parts Kit or the Enclosing Tube Parts Kit. See Page 35 & 36.

Part is available separately as a Manual Lift Stem Kit. 6) See Page 36. Body Plug (Item Number 958121) replaces Manual Lift Stem Assembly.

- Refer to drawing on Page 29.
- Refer to drawing on Page 30.
- Refer to drawing on Page 31.

See Table on Page 23 regarding part numbers for the enclosing tube gasket and the new Wolverine gasket.


Solenoid Valves Normally Closed E-HP Series

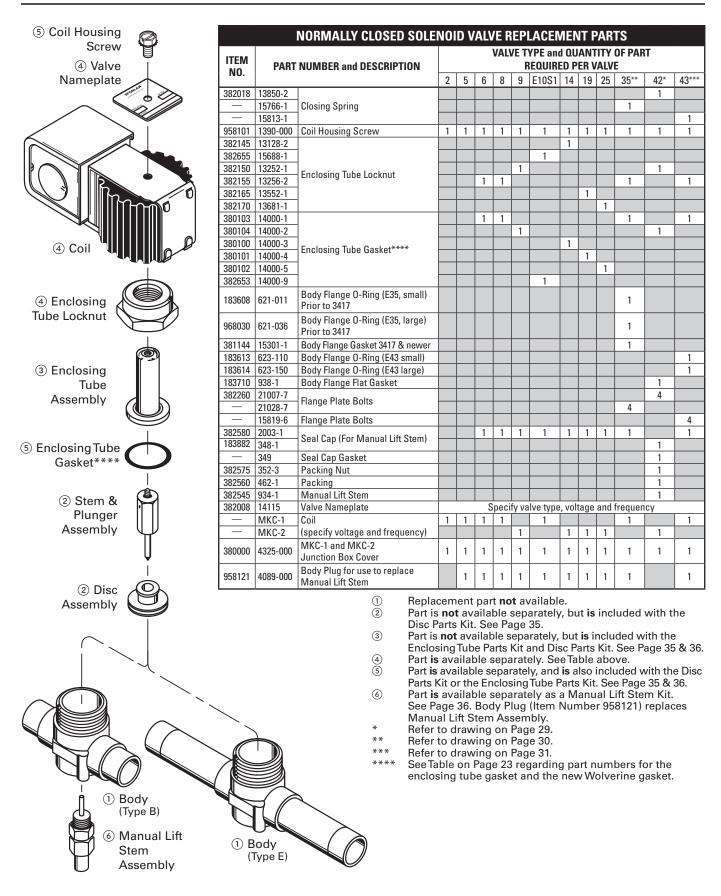

Solenoid Valves Normally Open Series


| ITEM | | NORMALLY OPEN SOLENO | | | VALVE TYPE and QUANTITY OF PART NUMBER and DESCRIPTION REQUIRED PER VALVE | | | | | | Locknut | | | | | | |
|-----------------------------|--|--|--------------------|-------|---|----------|----------|--------|---------|---|----------|-----|------|-----------|------------------|----------|-------------|
| NO. | | | | | | | | 9 | 10S2 | 14 | 19 | 25 | 35** | 42* | 43*** | O | ④ Spacer Cu |
| 382018 | 13850-2 | | | | | | | | | | | 1 | | | | | |
| — | 15766-1 | Closing Spring | l | | | | | | | | 1 | | | | ③ Valve | | |
| _ | 15813-1 | | | | | | | | | | | | 1 | | Namepla | | |
| 382005 | 1025-1 | Coil Housing L | ocknut | | | 1 | 1 | 1 | 1 | 1 | | 1 | | | | | |
| 382009 | 1025-7 | J | | 1 | 1 | | | | | | 1 | | 1 | | <i>/// /</i> / | | |
| 382145 | 13128-2 | | | | | | 1 | 1 | | | | | | | // | | |
| 382150 | 13252-1 | En el esta en Trib | - La alianat | 1 | 1 | 1 | | | | | 1 | 1 | 1 | | | | |
| 382155 382165 | 13256-2 13552-1 | Enclosing Tube | e Locknut | 1 | 1 | <u> </u> | | | 1 | | 1 | | 1 | | | | |
| 382105 382170 | 13681-1 | - | | | | | | | | 1 | | | | | s ar | | |
| 380103 | 14000-1 | | | 1 | 1 | | | | | 1 | 1 | | 1 | | | | |
| 80104 | 14000-2 | 1 | | | | 1 | | | | | <u> </u> | 1 | | 0 | | | |
| 80100 | 14000-2 | Enclosing Tube | e Gasket † | | | + · | 1 | 1 | | | | | | | | | |
| 80101 | 14000-4 | | | | | 1 | <u> </u> | · · | 1 | | | | | | | | |
| 80102 | 14000-5 | 1 | | | | | | | | 1 | | | | | | | |
| | | Body Flange O | -Ring | | | | | | | | 1 | | | | 3 Coil | | |
| 83608 | 621-011 | (E35, small) Pri | ior to 3417 | | | | | | | | 1 | | | | | | |
| 68030 | 621-036 | Body Flange O | -Ring | | | | | | | | 1 | | | 4 | | | |
| | | (E35, large) Pri | | | | | | | | | | | | | 🔰 🕘 Spacer Rin | | |
| 881144 | 15301-1 | | asket 3417 & newer | | | | | | | | 1 | | | C | ン・ | | |
| | 623-110 | | -Ring (E43 small) | | | | | | | | | | 1 | | | | |
| | | | -Ring (E43 large) | | | | | | | | | | 1 | | 🔊 🔪 🕄 Enclosin | | |
| | 938-1 | Body Flange F | lat Gasket | | | | | | | | | 1 | | | Tube | | |
| 382260 | 21007-7 | | | | | | | | | | 4 | 4 | | | Locknut | | |
| _ | 21028-7 15819-6 | Flange Plate B | OITS | | | | | | | | 4 | | 4 | | \mathbb{I} | | |
| 382003 | 2527-1 | Spacer Ring | 5/91 to Present | | | 1 | | | | | | 1 | 4 | | | | |
| 82050 | 2371-14 | opacer ming | Prior to 8/90 | | | 1 | | | | | | 1 | | | 5 | | |
| | 2371-14 | - | | | | <u> </u> | 1 | 1 | | | | | | | 20 | | |
| | | Spacer | Present | | | 1 | † · | · · | 1 | | | | | | 2 Enclosing | | |
| | 2371-21 | Ring | 8/90 and 4/91 | | | 1 | | | | | | 1 | | | Assembly | | |
| | 2371-7 | | Present | | | | | | | 1 | | | | | , | | |
| 82026 | 2717-5 | 0 | Prior to 8/90 | | | 1 | | | | | | 1 | | | \mathbf{A} | | |
| 82020 | 2717-6 | Spacer Cup | | | | 1 | 1 | 1 | 1 | 1 | | 1 | | | | | |
| 82034 | 15582-6 | | | | | | | | | | 1 | | 1 | | Y | | |
| 82008 | 14115 | Valve Namepla | ate | | | Speci | fy valv | e type | , volta | ge, & | 1 | ncy | | | | | |
| — | OMKC-1 | Coil | 0 (| 1 | 1 | | | | | | 1 | | 1 | | ④ Enclosin | | |
| _ | OMKC-2 | | le & frequency) | | | 1 | 1 | 1 | 1 | 1 | | 1 | | | Tube Ga | | |
| 80000 | 4325-000 | MKC-1 and MI Junction Box (| KU-2 Cover | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | | |
| Р | | ent part not t available se | | inclu | ded [,] | with | the D |)isc P | arts l | <it.< td=""><td></td><td></td><td></td><td></td><td>2 Disc Assemb</td></it.<> | | | | | 2 Disc Assemb | | |
|) P) P S R * R | Part is ava Part is ava Gee Page Refer to d Refer to d Refer to d | ailable separ ailable separ 35. rawing on P rawing on P rawing on P | age 30. | inclu | uded | | the [| Disc F | Parts | Kit. | | | | | | | |
| | | | and the new wol | | | | | | | ¢ | | | | Y e E) | (T | | |

Solenoid Valves Normally Open OE-HP Series

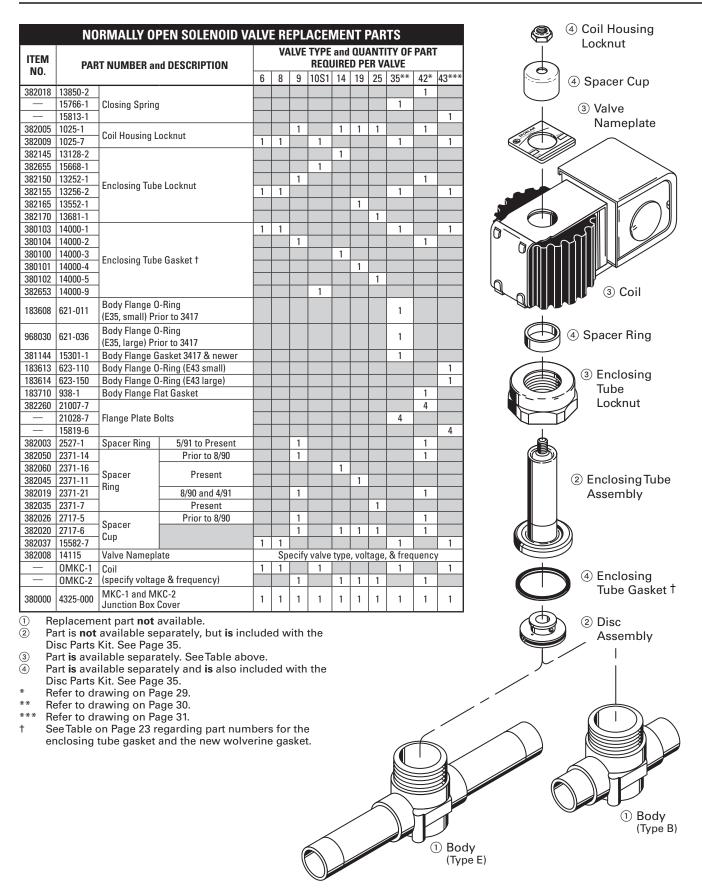


Solenoid Valves (0)(M)E42 Series*

See Parts Table on Page 25 thru 28

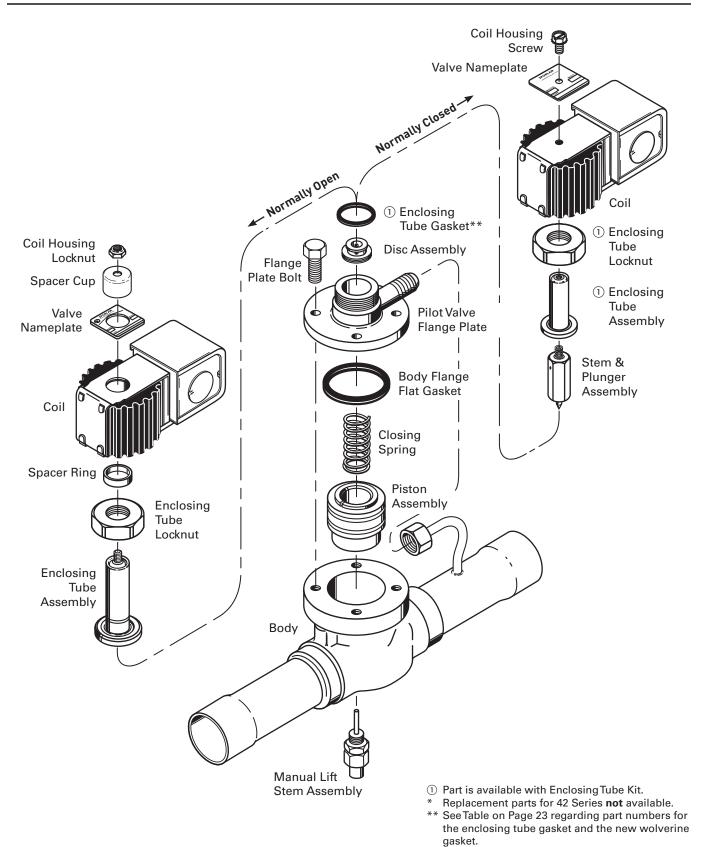


Solenoid Valves (0)(M)E35 Series

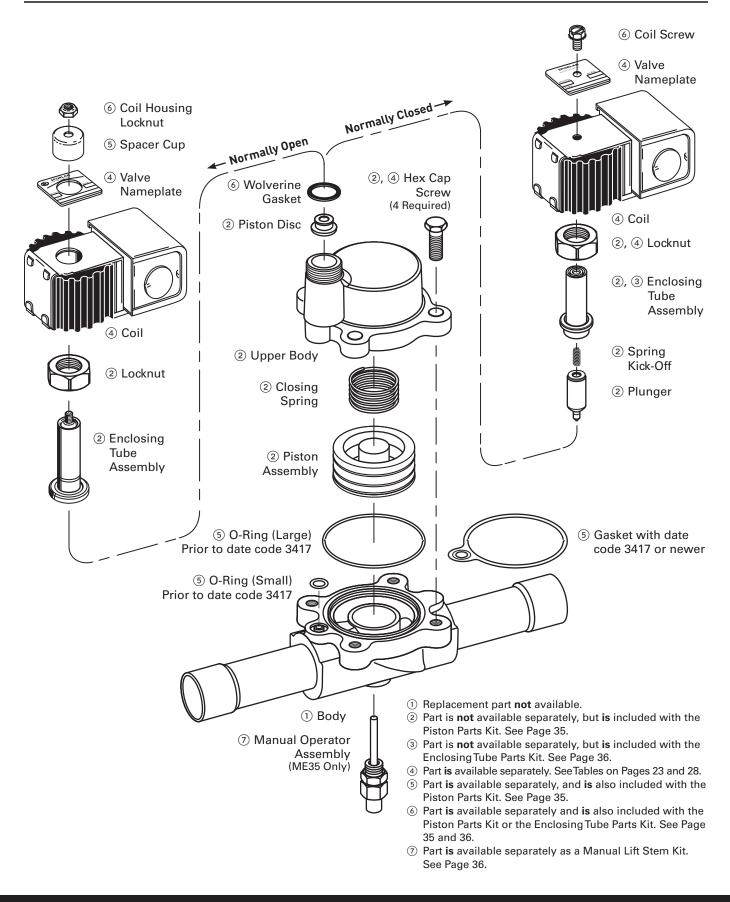


Solenoid Valves (O)(M)E43 Series

See Parts Table on Page 25 thru 28

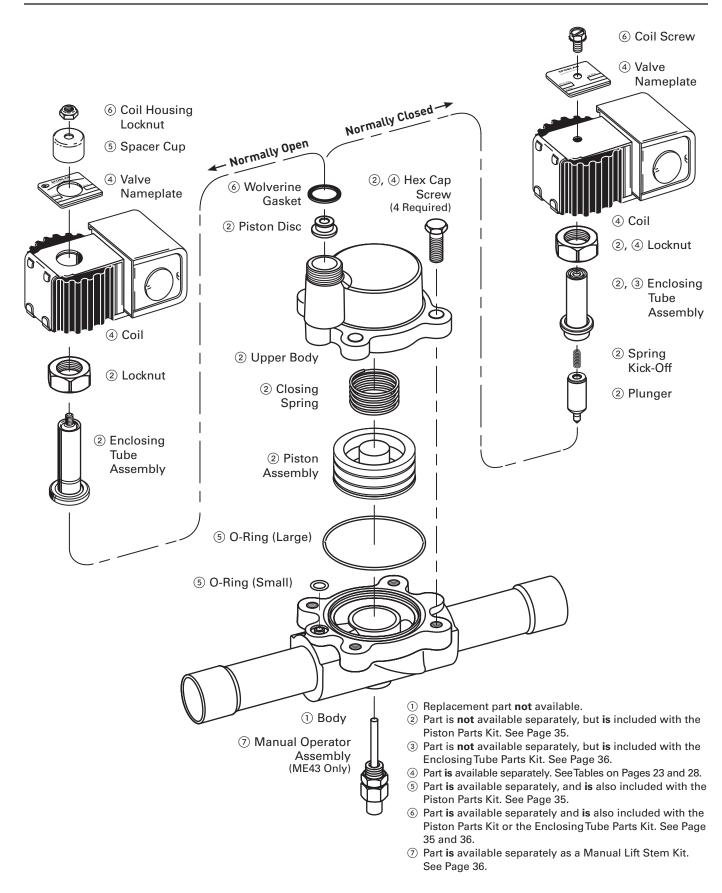


Solenoid Valves **10G Hot Gas Defrost and 3-Way Heat Reclaim Series**

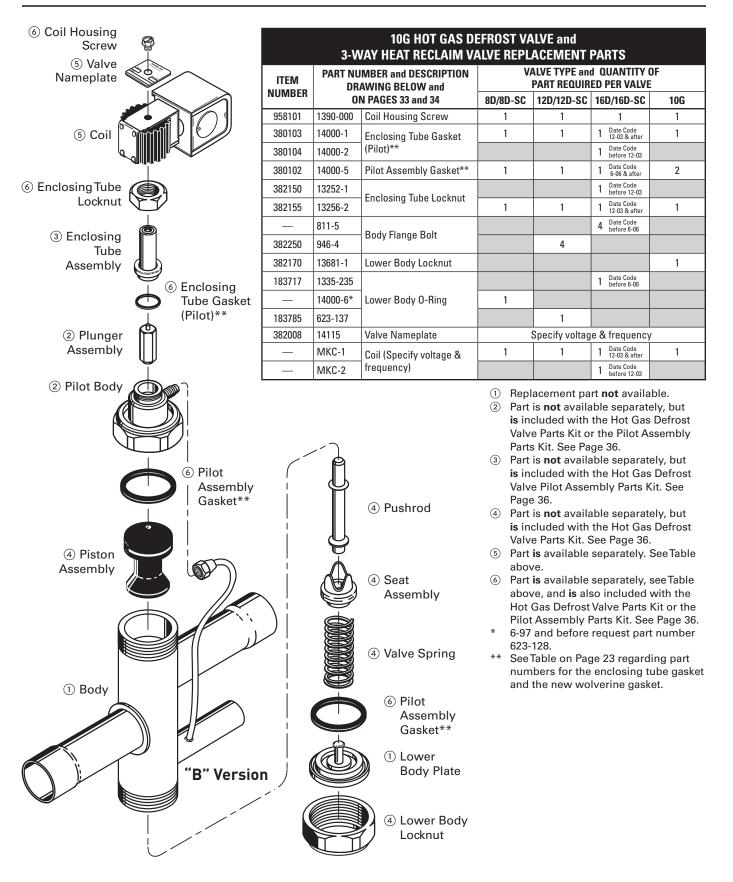

Solenoid Valves (S)12D 3-Way Heat Reclaim and Split Condenser Series

See Parts Table on Page 32

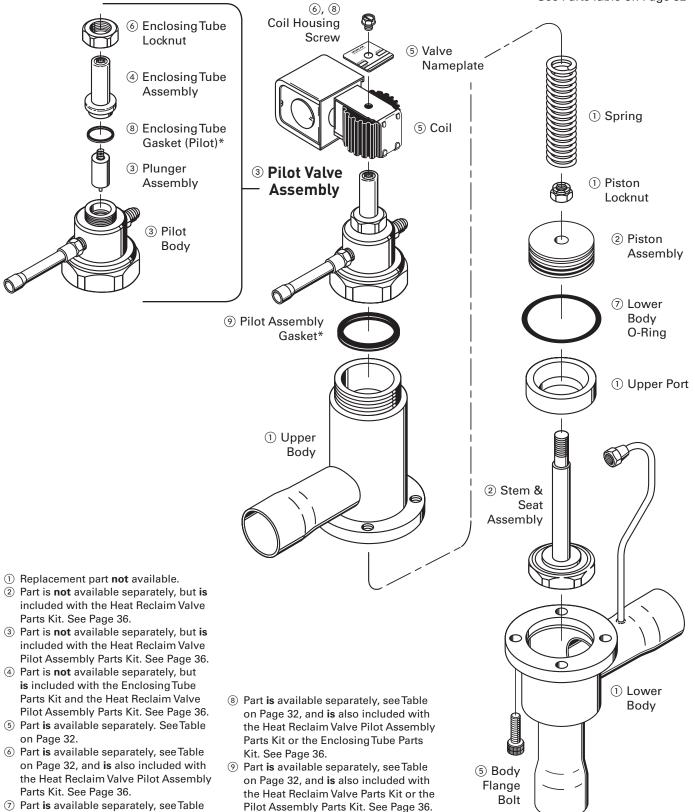

See Table on Page 23 regarding part

numbers for the enclosing tube gas-


ket and the new wolverine gasket.

7) Part is available separately, see Table on Page 32, and is also included with the Heat Reclaim Valve Parts Kit. See Page 36.

*

Solenoid Valves (S)8D and (S)16D* 3-Way Heat Reclaim and Split Condenser Series

See Parts Table on Page 32

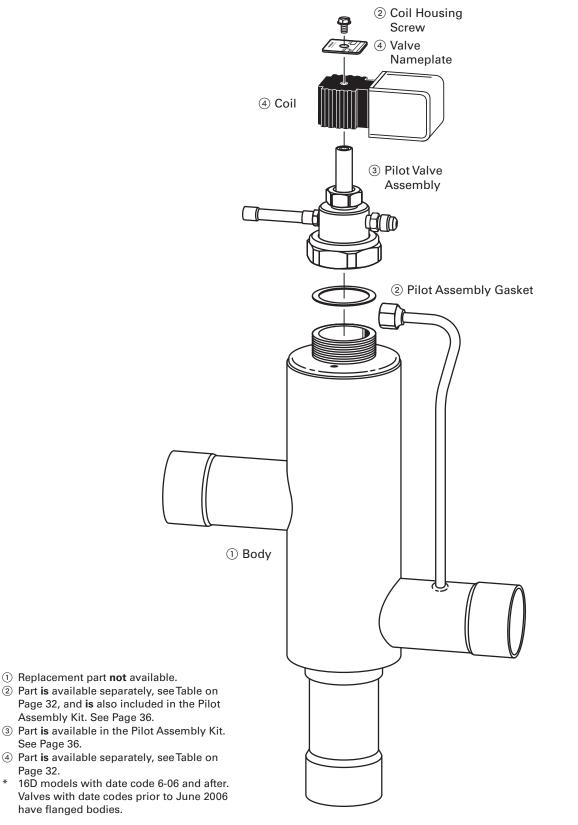

Solenoid Valves Parts Kits

| | DISC / PISTON / D | IAPHR <u>ag</u> | M KITS | DISC / PISTON / DIAPHRAGM KITS | | | | | | |
|--------------------------------|-------------------|-----------------|---|---|--------------------|-------------|--|--|--|--|
| | NORMALLY CL | OSED VAI | VES | | NORMALLY O | PEN VALV | 'ES | | | |
| VALVE TYPE | KIT NUMBER | ITEM NO. | DESCRIPTION OF CONTENTS | VALVE TYPE | KIT NUMBER | ITEM NO. | DESCRIPTION OF CONTENTS | | | |
| A3/E3/E5 | N/A | <u> </u> | Hermetic Valve | 0E6, 0E8, 0E35, 0E43 | **KS-0E6/0E8 | 380857 | | | | |
| S4/S6/S7 | N/A | — | Non-Repairable | 0B9/0E9 | KS-0B9/0E9 | 381405 | | | | |
| (M)B6/(M)E6 | KS-B6/E6 | 381145 | | OB10/0E10 | KS-0B10/0E10 | 381353 | | | | |
| (M)B9/(M)E9 | KS-B9/E9 | 381171 | | 0B14/0E14 | KS-0B14/0E14 | 381366 | | | | |
| (M)B10/(M)E10 | KS-B10/E10 | 381002 | | OB19/0E19 | KS-0B19/0E19 | 381379 | | | | |
| (M)B14/(M)E14 | KS-B14/E14 | 381028 | | 0B25/0E25 | KS-0B25/0E25 | 381392 | 1 Disc or Piston Assembly | | | |
| (M)B19/(M)E19 | KS-B19/E19 | 381054 | | OE6-HP/OE8-HP | KS-OE6-HP/ | 380846 | 1 Enclosing Tube Assembly 1 Enclosing Tube Gasket | | | |
| (M)B25/(M)E25 | KS-B25/E25 | 381080 | | | OE8-HP | | 1 Spacer Cup, 1 Spacer Ring | | | |
| (C)(M)B9/(C)(M)E9 | KS-CB9/CE9 | 381262 | | OE9-HP | KS-0E9-HP | 380848 | 1 Coil Housing Locknut | | | |
| (C)(M)B10/(C)(M)E10 | KS-CB10/CE10 | 381223 | | OE10S1-HP | KS-0E10S1-HP | 380849 | | | | |
| (C)(M)B14/(C)(M)E14 | KS-CB14/CE14 | 381236 | | OE10S2-HP | KS-0E10S2-HP | 380850 | | | | |
| (C)(M)B19/(C)(M)E19 | KS-CB19/CE19 | 381249 | | OE14-HP | KS-0E14-HP | 380851 | | | | |
| (M)B6/(M)E6-20 | KS-B6/E6-20 | 381158 | 1 Stem & Plunger Assembly | OE19-HP | KS-OE19-HP | 380852 | | | | |
| (M)B9/(M)E9-20 | KS-B9/E9-20 | 381184 | 1 Disc Assembly 1 Enclosing Tube Gasket | OE25-HP | KS-0E25-HP | 380853 | | | | |
| (M)B10/(M)E10-20 | KS-B10/E10-20 | 381015 | 1 Enclosing Tube Assembly | 0E35 (Prior to 3417) | KS-0E35 | 381130 | | | | |
| (M)B14/(M)E14-20 | KS-B14/E14-20 | 381041 | | 0E35 W | | | 1 Upper Valve Assembly | | | |
| (M)B19/(M)E19-20 | KS-B19/E19-20 | 381067 | | (3417 and newer) | KS-0E35 W | 381147 | 1 Piston Assembly | | | |
| (M)B25/(M)E25-20 | KS-B25/E25-20 | 381093 | | OE35-HP | KS-0E35-HP | 381140 | 1 Closing Spring 1 Body Flange Gasket | | | |
| (M)E6-HP | KS-B6/E6-HP | 381111 | | (Prior to 3417) | | | 1 Spacer Ring, 1 Spacer Cup | | | |
| (M)E8-HP | KS-E8-HP | 380855 | | OE35-HP W (3417 and newer) | KS-0E35-HP W | 381143 | 1 Coil Housing Locknut | | | |
| (M)E9-HP | KS-B9/E9-HP | 380819 | | 0E43-HP | KS-0E43-HP | 381423 | | | | |
| (M)E10S1 | KS-E10S1 | 380856 | | DISC TYPE - INDUSTRIAL VALVES | | | | | | |
| (M)E14-HP | KS-B14/E14-HP | 380818 | | W6 | KS-W6 | 381509 | 1 Stem & Plunger Assembly | | | |
| (M)E19-HP | KS-B19/E19-HP | 380817 | | W14 | KS-W14 | 381457 | 1 Closing Spring | | | |
| (M)E25-HP | KS-B25/E25-HP | 381128 | | W19 | KS-W19 | 381470 | (Type W14, W19, W25 Only), 1 Disc Assembly | | | |
| (M)E35 | KS-E35 | 381118 | | W25 | KS-W25 | 381483 | 1 Enclosing Tube Gasket | | | |
| (Prior to 3417) (M)E35 W | | | | DI | APHRAGM TYPE - I | NDUSTRI | AL VALVES | | | |
| (IVI)E35 VV (3417 or newer) | KS-E35 W | 381146 | 1 Coil Housing Screw | (K)R18 | KS-R18 | 381431 | | | | |
| (M)E35-HP | | 050741 | 1 Upper Valve Assembly 1 Piston Assembly | (K)(B)R18 | KS-BR18 | 381197 | 1 Plunger Assembly | | | |
| (Prior to 3417) | KS-E35-HP | 958741 | 1 Closing Spring | (K)R24 | KS-R24 | 381444 | 1 Diaphragm Assembly 1 Enclosing Tube O-Ring | | | |
| (M)E35-HP W (3417 or newer) | KS-35-HP W | 381142 | 1 Body Flange Gasket or Flat Gasket | (K)(B)R24 | KS-BR24 | 381210 | 5 5 | | | |
| (M)E43 | KS-E43 | 381421 | | * Rapid Cycle Valves ** Use as replaceme | | | same valve series kit. | | | |
| (M)E43-HP | KS-E43-HP | 381422 | | Ose as replaceme | In phot for OE35 a | | non-m valves. | | | |
| | RAPID CYCL | E VALVES | * | | | | | | | |
| XUP/XXF | KS-XUP/XXF | 381638 | 1 Stem & Plunger Assembly | | | | | | | |
| XRN | KS-XRN | 381587 | 1 Disc Assembly 1 Enclosing Tube Assembly | | | | | | | |
| XRM | KS-XRM | 381574 | 1 Coil Housing Locknut 1 Spacer Ring, 1 Spacer Cup | | | | | | | |
| | | 1 | I I Spacor Ring 1 Spacor Lun L | | | | | | | |

Converting Solenoid Valves

Solenoid valves can be converted from a standard valve to a high pressure (HP) style valve by installing the "HP" parts kit into the standard valve. Likewise, the "HP" valve can be converted to a standard valve by installing a standard parts kit. Care must be taken when converting from a "HP" version to a standard version to ensure the valve will not be used on higher pressure refrigerants such as R-410A.


A Normally Closed solenoid valve can be converted to a normally open solenoid by installing the respective Normally Open parts kit. Likewise, the Normally Open solenoid valve can be converted to a Normally Closed solenoid by installing the Normally Closed solenoid kit.

Solenoid Valves Parts Kits

| HEAT R | ECLAIM VALVES / SP | LIT CON | DENSER VALVES | | ENCLOSING | TUBE KIT | S |
|-------------------------------|-----------------------|-------------|---|--|---------------------|------------------|--|
| VALVE TYPE | KIT NUMBER | ITEM NO. | DESCRIPTION OF CONTENTS | VALVE TYPE | KIT NUMBER | ITEM NO. | DESCRIPTION OF CONTENTS |
| (S)8D7B/8D9B(-HP) | KS-8DB | 380897 | | (M)B6/(M)E6, (M)E35, | | | |
| (S)8D7C/8D9C(-HP) | KS-8DC | 380811 | | (M)E43 | | | |
| (S)8D9B-SC | KS-8DB-SC | 380896 | | W6/10G | KE-6 | 382435 | |
| (S)8D9C-SC | KS-8DC-SC | 380812 | 1 Enclosing Tube Gasket 1 Pilot Assembly Gasket | 16D & 16D-SC (12-03 & after) | | | |
| (S)12D11B/ 12D13B(-HP) | KS-12DB | 380871 | 1 Stem & Seat Assembly 1 Piston Assembly | (C)(M)B9/(C)(M)E9 | KE-9 | 382355 | |
| (S)12D11C/ 12D13C(-HP) | KS-12DC | 380813 | 1 Lower Body O-Ring 1 Lower Body Gasket (8D | (M)E34 (M)E42 | KE-9 | 382355 | 1 Enclosing Tube Assembly |
| (S)12D11B-SC/ 12D13B-SC | KS-12DB-SC | 380873 | Only) | 16D/16D-SC (Prior to 12/03) | | | 1 Enclosing Tube Gasket or O-Ring |
| (S)12D11C-SC/ 12D13C-SC | KS-12DC-SC | 380814 | | (C)(M)B10/(C)(M)E10 (C)(M)B14/(C)(M)E14 | KE-10/14 | 382390 | 1 Coil Housing Screw 2 Body Screws (KE-3 Only) |
| 16D17B | KS-16DB | 380886 | | W14 | | | |
| 16D17B (12-03 to 0606) | KS-16DB-A | 380822 | | (C)(M)B19/(C)(M)E19 | KE-19 | 382365 | |
| 16D17C | KS-16DC | 380815 | | W19 | KE-13 | 302303 | |
| 16D17C (12-03 to 0606) | KS-16DC-A | 380823 | 1 Stem & Seat Assembly | (M)B25/(M)E25 | KE-25 | 382400 | |
| 16D17B-SC | KS-16DB-SC | 380887 | 1 Upper Valve Seat | W25 | KL-2J | 302400 | |
| 16D17B-SC | | | 1 Piston Assembly | 8D/12D, 8D-SC/12D-SC | KE-8D/12D | 382327 | |
| (12-03 to 0606) | KS-16DB-SC-A | 380825 | 1 Lower Body O-Ring | | MANUAL LIF | 1 | (IT |
| 16D17C-SC | KS-16DC-SC | 380816 | | MB6/ME6, ME9 | KM-1 | 382460 | |
| 16D17C-SC (12-03 to 0606) | KS-16DC-SC-A | 380826 | | MB9 MB10, MB14 | KM-2 KM-3 | 382470 382480 | |
| PILOT | ASSEMBLY | | | ME14 | KM-4 | 382490 | |
| 8D, 12D, 8D-HP, | KS-8DP/12DP-HP | 382292 | | ME10 | | 002.00 | KM-1 thru -7 and -9 includes |
| 12D-HP | K3-0DF/12DF-HF | 302292 | | MB19, ME19 | | 382500 | 1 Manual Lift Stem Assembly (Includes P/N 2003-1) |
| S8D, S12D, S8D-HP, S12D-HP | KS-S8D/S12DP-HP | 958740 | 1 Pilot Assembly Gasket 1 Coil Housing Screw | MB33, ME33 | KM-5 | | † Seal Cap Available |
| 8D-SC, 12D-SC | KS-8D/12D/ 14DP-SC | 380803 | 1 Pilot Valve Assembly | ME34 MB25, ME25 | KM-6 | 382510 | Separately |
| 000 00 0100 00 | | 050744 | | ME35 | KM-7 | 382511 | |
| S8D-SC, S12D-SC | KS-S8D/S12DP-SC | 958744 | | ME42 | KM-8* | 382512 | |
| 16D | KS-16DP | 382291 | | ME43 | KM-9 | 382513 | |
| 16D (12/03 & after) | KS-16DP-A | 380824 | | * KM-8 contains severa | | | |
| S16D (12/03 & after) | KS-S16DP | 958748 | 1 Coil Housing Screw 1 Pilot Valve Assembly | † Seal cap (Item No. 382 | 2580) for KM-1 thru | -7 and -9 | is available separately. |
| 16D-SC | KS-16DP-SC | 380804 | 1 Pilot Assembly Gasket | | | | |
| 16D-SC (12/03 & after) | KS-16DP-SC-A | 380827 | | | | | |
| S16D-SC (12/03 & after) | KS-S16DP-SC | 958746 | | | | | |
| | HOT GAS DEFR | OST VAL | VES | | SOLENOID CO | II MAGN | IFT |
| 10G79B | | | 1 Enclosing Tube Gasket 2 Pilot Assembly Gaskets | ITEM NO. | 1 | | N OF CONTENTS |
| 10G711A, B, C | KS-10G | 380870 | 1 Plunger Assembly, 1 Pushrod | | | | |
| 10G713 | | | 1 Seat Assembly, 1 Piston Assembly, 1 Valve Spring | 310250 | Sporlan Solenoid | | SPORLAN |
| PILOT | ASSEMBLY | | 1 Enclosing Tube Gasket | | Service N | lagnet | |
| 10G-B | KS-10GP-B | 382285 | 1 Pilot Valve Assembly | | | | V. |
| 10G-C | KS-10GP-C | 382295 | 1 Coil Housing Screw | | | | |

Cap Screw, Bolt and Nut Specifications


| VALVE TYPE | | INLET and OUTLE | | INUT SPECIFICATION | BOLT | BOLT | BOLT | NII |
|--|--|---|--|---|---|---|------|------------------|
| | | INLET | | OUTLET | DIA. | LENGTH | QUAI | NTITY |
| | | | OTATIC E | XPANSION VALVES | Inches | Inches | REQU | JIKEL |
| | | | 7 | stributor | 1 | 4-1/2*** | | <u> </u> |
| | | 1/2, 5/8, 7/8 | | 5/8, 7/8, 1-1/8 | 1 | τ-1/2 | | |
| Н | | , _, _, ., . | | 10, 1192 Distributor | 7/16 | 4-1/2 | | |
| | | Up to 1/2 FPT | | Up to 1/2 FPT | 1 | | | |
| |] | | | 93 Distributor | | 5-1/2**** | 2 | 2 |
| | Flange | Up to 1-3/8 | 1119 Di | stributor | | 5-1/2 | 2 | 2 |
| M, V | | | | Up to 1-3/8 | | | - | |
| | | 1-5/8 ODF | Flamma | 1-5/8 ODF | 1/2 | 6 | | |
| | | Up to 1 FPT | Flange | Up to 1 FPT | { | 6-1/2 5 | - | |
| W | - | 1-1/8, 1-3/8, 1-5/8, 2-1/8 ODF | | 1-1/8, 1-3/8, 1-5/8, 2-1/8 ODF | 1 | 5-1/2 | 4 | 4 |
| | Flange | 1/4, 3/8, 1/2 FPT | | 1-1/0, 1-3/0, 1-3/0, 2-1/0 ODI | | 1-3/4 | - | - |
| | XD Stra | | 1 | _ | | 3 | | |
| | XD Stra | iner x MA5 Solenoid | | | | 4-1/2 | | |
| D | | | | 1/4, 3/8, 1/2 FPT | 7/16 | 1-3/4 |] | |
| | | _ | | 82 Distributor | - | 1-1/2 | | |
| | | | | stributor | - | 2-1/4 | 2 | |
| | Flange | 1/2 2/4 1 EDT | 1180 Di | stributor | | 2 | - | |
| | 8000 Str | 1/2, 3/4, 1 FPT | - | | | 1-3/4 | | |
| | | ainer x MA17 Solenoid | | _ | 1/2 | 5-1/2 | 1 | |
| А | 0000 01 | | Flange | 1/2, 3/4, 1 FPT | 1/2 | | 1 | |
| | | _ | | 85 Distributor | 1 | 1-3/4 | | |
| | Elango | on Valve Body | | Threaded | 3/8* | 1-1/4* | | |
| | Flatige | · | | tions on Element | 3/0 | 1-1/4 | _ | |
| | | | DMBINAT | ION VALVES | 1 | - | | 1 |
| | MA5, SA-H | | | | 7/16 | 6 | 2 | - |
| | 17, SA-K9 | (87, Flange (Female) | | | | 6-1/2 7 | 2 | 2 |
| | | 0, Flange (Female) | | | 1/2 | 7-1/2 | 2 | 2 |
| | | SA-K90, Flange (Female)** | | | 1/2 | 8 | 2 | 2 |
| | 0,111200,1 | in the of the ngo (to malo) | DISTRI | BUTORS | | Ū | | |
| 1138 | | 1/2 2/4 1 EDT | | | 1/2 | | | |
| 1185 |] | 1/2, 3/4, 1 FPT | | | 1/2 | 2-1/2 | | |
| 1130 | | | | | | 2 1/2 | | |
| 1182 | Flange | 1/4 2/0 1/2 EDT | | — | 7/16 | 2 | 2 | 2 |
| 1133 1132 | - | 1/4, 3/8, 1/2 FPT | | | 7/16 | 2 | 1 | |
| 1180 | - | | | | | 3 | | |
| | 1 | | SOLENO | D VALVES | | | | |
| | Flance | | Flange | 1/4, 3/8, 1/2 FPT | | 4 | | 2 |
| MA5A3 | гапде | 1/4, 3/8, 1/2 FPT | Type D | Expansion Valve | 7/16 | | 1 | Ē |
| WIZJA9 | XD Stra | iner | | 1/4, 3/8, 1/2 FPT | ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,, | 5-1/2 | | 2 |
| | | ···- - · | | Expansion Valve | | 4-1/2 | 2 | _ |
| | Flange | 1/2, 3/4 1 FPT | | 1/2, 3/4, 1 FPT | - | 6 5-1/2 | - | 2 |
| | - | | T A | Funnanaian Malua | | | | |
| MA17A3 | | | | Expansion Valve | 1/2 | | 1 | 2 |
| MA17A3 | 8000 Str | | Flange | 1/2, 3/4, 1 FPT | 1/2 | 5-1/2 | | 2 |
| | | | Flange Type A | 1/2, 3/4, 1 FPT Expansion Valve | 1/2 | 5-1/2 5-1/2 | | - |
| MA17A3 MA32P3 | Flange | ainer | Flange Type A | 1/2, 3/4, 1 FPT | 1/2 | 5-1/2 | 8 | 2 |
| MA32P3 | Flange 9008, 90 Flange | ainer 1, 1-1/4 FPT 10 Strainer 1-1/2 FPT | Flange Type A Flange | 1/2, 3/4, 1 FPT Expansion Valve | | 5-1/2 5-1/2 | 8 | - |
| MA32P3 MA42P3 | Flange 9008, 90 Flange 9012 Str | ainer 1, 1-1/4 FPT 10 Strainer 1-1/2 FPT ainer (Obsolete) | Flange Type A Flange Flange | 1/2, 3/4, 1 FPT Expansion Valve 1, 1-1/4 FPT 1-1/2 FPT | 5/8 | 5-1/2 5-1/2 | | 8 |
| MA32P3 MA42P3 MA42S3 | Flange 9008, 90 Flange 9012 Str Flange | ainer 1, 1-1/4 FPT 10 Strainer 1-1/2 FPT ainer (Obsolete) 1-5/8, 2-1/8 ODF | Flange Type A Flange Flange Flange | 1/2, 3/4, 1 FPT Expansion Valve 1, 1-1/4 FPT 1-1/2 FPT 1-5/8, 2-1/8 ODF | | 5-1/2 5-1/2 3 3-1/4 | 8 | - |
| MA32P3 MA42P3 MA42S3 | Flange 9008, 90 Flange 9012 Str | ainer 1, 1-1/4 FPT 10 Strainer 1-1/2 FPT ainer (Obsolete) 1-5/8, 2-1/8 ODF 2-1/8, 2-5/8 ODF | Flange Type A Flange Flange Flange | 1/2, 3/4, 1 FPT Expansion Valve 1, 1-1/4 FPT 1-1/2 FPT | | 5-1/2 5-1/2 3 3-1/4 3-1/2 | | 8 |
| MA32P3 MA42P3 MA42S3 MA50S3 | Flange 9008, 90 Flange 9012 Str Flange Flange | ainer 1, 1-1/4 FPT 10 Strainer 1-1/2 FPT ainer (Obsolete) 1-5/8, 2-1/8 ODF 2-1/8, 2-5/8 ODF 1-1/8, 1-3/8 ODF | Flange Type A Flange Flange Flange | 1/2, 3/4, 1 FPT Expansion Valve 1, 1-1/4 FPT 1-1/2 FPT 1-5/8, 2-1/8 ODF | | 5-1/2 5-1/2 3 3-1/4 3-1/2 7 | | 8 |
| MA32P3 MA42P3 MA42S3 MA50S3 | Flange 9008, 90 Flange 9012 Str Flange Flange | ainer 1, 1-1/4 FPT 10 Strainer 1-1/2 FPT ainer (Obsolete) 1-5/8, 2-1/8 ODF 2-1/8, 2-5/8 ODF | Flange Type A Flange Flange Flange Flange Flange | 1/2, 3/4, 1 FPT Expansion Valve 1, 1-1/4 FPT 1-1/2 FPT | 5/8 | 5-1/2 5-1/2 3 3-1/4 3-1/2 | 8 | 8 |
| MA32P3 MA42P3 MA42S3 MA50S3 (M)B33S2 | Flange 9008, 90 Flange 9012 Str Flange Flange | ainer 1, 1-1/4 FPT 10 Strainer 1-1/2 FPT ainer (Obsolete) 1-5/8, 2-1/8 ODF 2-1/8, 2-5/8 ODF 1-1/8, 1-3/8 ODF | Flange Type A Flange Flange Flange Flange Flange | 1/2, 3/4, 1 FPT Expansion Valve 1, 1-1/4 FPT 1-1/2 FPT | 5/8 | 5-1/2 5-1/2 3 3-1/4 3-1/2 7 7-1/2 | 8 | 8 2 |
| MA32P3 MA42P3 MA42S3 MA50S3 M)B33S2 XD-074 | Flange 9008, 90 Flange 9012 Str Flange Flange | ainer 1, 1-1/4 FPT 10 Strainer 1-1/2 FPT ainer (Obsolete) 1-5/8, 2-1/8 ODF 2-1/8, 2-5/8 ODF 1-1/8, 1-3/8 ODF | Flange Type A Flange Flange Flange Flange Flange STRA | 1/2, 3/4, 1 FPT Expansion Valve 1, 1-1/4 FPT 1-1/2 FPT | 5/8 | 5-1/2 5-1/2 3 3-1/4 3-1/2 7 7-1/2 3-1/2 | 8 | 8 2 |
| MA32P3 MA42P3 MA42S3 MA50S3 M)B33S2 XD-074 8000 | Flange 9008, 90 Flange 9012 Str Flange Flange Flange | ainer 1, 1-1/4 FPT 10 Strainer 1-1/2 FPT ainer (Obsolete) 1-5/8, 2-1/8 ODF 2-1/8, 2-5/8 ODF 1-1/8, 1-3/8 ODF | Flange Type A Flange Flange Flange Flange Flange STRA | 1/2, 3/4, 1 FPT Expansion Valve 1, 1-1/4 FPT 1-1/2 FPT | 5/8 | 5-1/2 5-1/2 3 3-1/4 3-1/2 7 7-1/2 3-1/2 2-1/2 | 8 | 8 8 2 2 |
| MA32P3 MA42P3 MA42S3 MA50S3 (M)B33S2 XD-074 | Flange 9008, 90 Flange 9012 Str Flange Flange Flange | ainer 1, 1-1/4 FPT 10 Strainer 1-1/2 FPT ainer (Obsolete) 1-5/8, 2-1/8 ODF 2-1/8, 2-5/8 ODF 1-1/8, 1-3/8 ODF | Flange Type A Flange Flange Flange Flange STRA Flange | 1/2, 3/4, 1 FPT Expansion Valve 1, 1-1/4 FPT 1-1/2 FPT | 5/8 | 5-1/2 5-1/2 3 3-1/4 3-1/2 7 7-1/2 3-1/2 | 8 | 8 8 2 |
| MA32P3 MA42P3 MA42S3 MA50S3 (M)B33S2 XD-074 8000 | Flange 9008, 90 Flange 9012 Str Flange Flange Flange | ainer 1, 1-1/4 FPT 10 Strainer 1-1/2 FPT ainer (Obsolete) 1-5/8, 2-1/8 ODF 2-1/8, 2-5/8 ODF 1-1/8, 1-3/8 ODF | Flange Type A Flange Flange Flange Flange STRA Flange | 1/2, 3/4, 1 FPT Expansion Valve 1, 1-1/4 FPT 1-1/2 FPT | 5/8 | 5-1/2 5-1/2 3 3-1/4 3-1/2 7 7-1/2 3-1/2 2-1/2 | 8 | 8 8 2 2 |



Ordering Instructions

CAP SCREW: This

terminology refers to a bolt that mates to a threaded flange and does not require a nut.



CAP SCREW To Order, Specify "Cap Screw" (and give bolt diameter and length).

BOLT and/or NUT

To Order a Bolt, specify "Bolt" (and give bolt diameter and length). To order a Nut, specify "Nut" (and give hole diameter).

- Note those combinations which bolt to either the Type D or A Valve do not require nuts since valve flanges are threaded.
- ** The combination with the MB33 Solenoid Valve would not normally be bolted to a TEV (Type M Valve) due to the long length (13") of the bolt.
- *** 4" bolts less nuts required for older style 1124 Distributors with threaded bolt holes.
- **** 5" bolts less nuts required for older style 1121 & 1193 distributors with threaded bolt holes.

Replaceable Core Catch-All® Filter-Driers C-R420 Series


| | C-R420 SERIES REPLACEMENT PARTS and PARTS KITS | | | | | | | | | | |
|----------------|--|----------|----------------------------------|-----------------|---------------------------|--|--|--|--|--|--|
| ITEM NUMBER | NUMBER PART NUMBER | | DESCRIPTION | NOT SUPPLIED | C-R420 SERIES INTERNAL | | | | | | |
| CURRENT | CURRENT | OBSOLETE | | IN KIT | PARTS KIT * | | | | | | |
| 481300 | JP-711-000 | 4163-9 | Bolt, 5/16" x 1-1/2" (6 Req'd)** | Х | | | | | | | |
| 481220 | JP-679-000 | 6162 | Core Retainer Assembly | | 1 | | | | | | |
| 481216 | JP-335-001 | 6154 | Endplate (Plain) | Х | | | | | | | |
| 481217 | JP-335-000 | 6154-2 | Endplate ("-G" Type) | Х | | | | | | | |
| 481103 | 1288-005 | 6153-2 | Gasket, Endplate | Х | | | | | | | |
| 481161 | JP-571-001 | 6155-2 | Gasket, Outlet Seal | Х | | | | | | | |
| 481322 | JP-710-000 | _ | Nut, 5/16" (6 Req'd) | Х | | | | | | | |
| 481101 | 5310 | _ | Pipe Plug ("-G") | Х | | | | | | | |
| 481224 | JP-676-000 | 6163 | Plate, Outlet Core Retainer | | 1 | | | | | | |
| 481288 | JP-513-005 | 6172-1 | Screen, Outlet – 10 Mesh | | 1 | | | | | | |
| 481280 | JP-514-005 | 6171-4 | Screen, Outlet – 100 Mesh | | 1 | | | | | | |

1) Access Valve (Item No.: 183174) is available.

Valve Core (Item No.: 480088) may be purchased separately.


* Kit Item No.: 481340, Description: K-RC420

** Grade 5 bolts used on C-R420 Series



Mounting Bracket

Item No.: 481312, A-175-1 Mounting Bracket for shell types C-R424-G, C-R425-G, C-R427-G and ROF-413-T ONLY. One bracket per package. Usually one bracket is adequate for mounting these Catch-Alls or Oil Filters. All brackets are supplied with a bolt, nut, and washer.

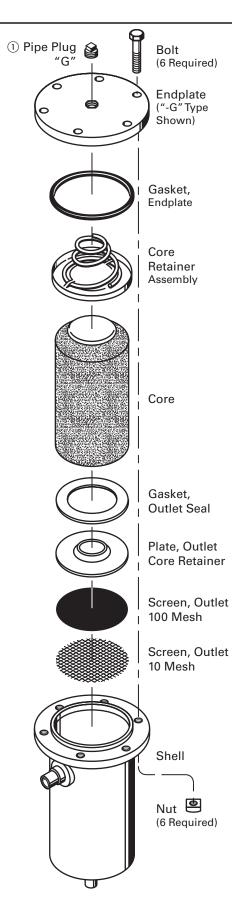


Replaceable Core Catch-All® Filter-Driers C-480 Series through C-1920 Series

| | | C | -480 THROUGH C-1920 REPL | ACEABL <u>E C</u> | ORE PARTS ar | d PARTS KITS | | |
|---|--|--|--|--|----------------------|----------------------|----------------------|----------------------|
| | | | | NOT | C-480 \$ | SERIES | C-960 \$ | SERIES |
| DESIGN | ITEM | PART | NUMBER and DESCRIPTION | SUPPLIED | | ITEM N | UMBER | |
| DESIGN | NUMBER | | DRAWING ON PAGE 40 | IN KIT | 481350 | 481349 | 481360 | 481359 |
| | | | | | K-RC480-B | K-RC480-C | K-RC960-B | K-RC960-C |
| B, C | 481292 | 4141-1 | Bolt 5/16" x 1-3/4" (8 Req'd) ① Grade 8 | х | | | | |
| В, С | 480077 | 5318-1 | Endplate (Plain) | Х | | | | |
| B, C | 480031 | 5318-5 | Endplate ("-G" Type) | Х | | | | |
| B, C | 481125 | 1288-001 | Gasket, Endplate (1/16" Thick) | Х | | | | |
| В | — | | Gasket, Outer Retainer Plate | | 1 | | 1 | |
| С | 481116 | 5383-5 | Gasket, Outer Retainer Plate | | | 1 | | 1 |
| В | 183361 | 4543-000 | Gasket, Outlet Screen (Felt) | | 1 | | 1 | |
| В, С | 481287 | 6244-2 | Nut - 5/16" (8 Req'd) Grade 8 | Х | | | | |
| В, С | 481101 | 5310 | Pipe Plug ("-G") | Х | | | | |
| В, С | 481091 | 5296-5 | Plate, Core Positioning (Solid) | | 1 | 1 | 1 | 1 |
| В, С | 481093 | 5296-3 | Plate, Core Spacer | | | | 1 | 1 |
| В | 481095 | 5296-4 | Plate, Outlet Core Retainer | | 1 | | 1 | |
| С | 481090 | 5295-2 | Plate, Outlet Core Retainer | | | 1 | | 1 |
| В | 481276 | 6172-6 | Screen, Outlet - 10 Mesh | | 1 | | 1 | |
| B, C | 481272 | 6171-5 | Screen, Outlet - 100 Mesh | | 1 | 1 | 1 | 1 |
| B, C | 481203 | 5806.1 | Spring, End | | 1 | 1 | 1 | 1 |
| B, C | 481228 | 5320-1 | Tie Rod C-480 | | 3 | 3 | | |
| B, C | 481232 | 5320-2 | Tie Rod C-960 | | | | 3 | 3 |
| | | | | | | | | |
| | | | | NOT | C-1440 | SERIES | | |
| DESIGN | ITEM | | NUMBER and DESCRIPTION | | | | | |
| | | | | SUPPLIED | | ITEM N | | |
| | NUMBER | | DRAWING ON PAGE 40 | SUPPLIED IN KIT | 481370 | 481369 | 481380 | 481379 |
| | NUMBER | | | | 481370 K-RC1440-B | | | 481379 K-RC1920-C |
| B, C | 481292 | 4141-1 | Bolt 5/16" x 1-3/4" (8 Req'd) ① Heat Treated Steel - Grade 8 | IN KIT X | | 481369 | 481380 | |
| B, C | 481292 481164 | 4141-1 5318-3 | Bolt 5/16" x 1-3/4" (8 Req'd) ① Heat Treated Steel - Grade 8 Endplate (Plain) | IN KIT X X | | 481369 | 481380 | |
| B, C B, C | 481292 | 4141-1 5318-3 5318-5 | Bolt 5/16" x 1-3/4" (8 Req'd) ① Heat Treated Steel - Grade 8 Endplate (Plain) Endplate ("-G" Type) | IN KIT X X X | | 481369 | 481380 | |
| B, C B, C B, C | 481292 481164 480031 481125 | 4141-1 5318-3 5318-5 1288-001 | Bolt 5/16" x 1-3/4" (8 Req'd) ① Heat Treated Steel - Grade 8 Endplate (Plain) Endplate ("-G" Type) Gasket, Endplate (1/16"Thick) | IN KIT X X | K-RC1440-B | 481369 | 481380 K-RC1920-B | |
| B, C B, C B, C B, C B | 481292 481164 480031 481125 — | 4141-1 5318-3 5318-5 1288-001 — | Bolt 5/16" x 1-3/4" (8 Req'd) ① Heat Treated Steel - Grade 8 Endplate (Plain) Endplate ("-G" Type) Gasket, Endplate (1/16"Thick) Gasket, Outer Retainer Plate | IN KIT X X X | | 481369 K-RC1440-C | 481380 | |
| B, C B, C B, C B C | 481292 481164 480031 481125 — 481116 | 4141-1 5318-3 5318-5 1288-001 — 5383-5 | Bolt 5/16" x 1-3/4" (8 Req'd) ① Heat Treated Steel - Grade 8 Endplate (Plain) Endplate ("-G" Type) Gasket, Endplate (1/16"Thick) Gasket, Outer Retainer Plate Gasket, Outer Retainer Plate | IN KIT X X X | K-RC1440-B | 481369 | 481380 K-RC1920-B | |
| B, C B, C B, C B C B | 481292 481164 480031 481125 — 481116 183361 | 4141-1 5318-3 5318-5 1288-001 — 5383-5 4543-000 | Bolt 5/16" x 1-3/4" (8 Req'd) ① Heat Treated Steel - Grade 8 Endplate (Plain) Endplate ("-G" Type) Gasket, Endplate (1/16"Thick) Gasket, Outer Retainer Plate Gasket, Outer Retainer Plate Gasket, Outlet Screen (Felt) | IN KIT X X X X X X | K-RC1440-B | 481369 K-RC1440-C | 481380 K-RC1920-B | K-RC1920-C |
| B, C B, C B, C B C B B, C B, C | 481292 481164 480031 481125 481116 183361 481287 | 4141-1 5318-3 5318-5 1288-001 — 5383-5 4543-000 6244-2 | Bolt 5/16" x 1-3/4" (8 Req'd) ① Heat Treated Steel - Grade 8 Endplate (Plain) Endplate ("-G" Type) Gasket, Endplate (1/16"Thick) Gasket, Outer Retainer Plate Gasket, Outer Retainer Plate Gasket, Outlet Screen (Felt) Nut - 5/16" (8 Req'd) | IN KIT X X X X X X X X X X X X X X X X X X X | K-RC1440-B | 481369 K-RC1440-C | 481380 K-RC1920-B | K-RC1920-C |
| B, C B, C B, C B C B B, C B, C B, C | 481292 481164 480031 481125 481116 183361 481287 481101 | 4141-1 5318-3 5318-5 1288-001 — 5383-5 4543-000 6244-2 5310 | Bolt 5/16" x 1-3/4" (8 Req'd) ① Heat Treated Steel - Grade 8 Endplate (Plain) Endplate ("-G" Type) Gasket, Endplate (1/16"Thick) Gasket, Outer Retainer Plate Gasket, Outer Retainer Plate Gasket, Outlet Screen (Felt) Nut - 5/16" (8 Req'd) Pipe Plug ("-G") | IN KIT X X X X X X | K-RC1440-B | 481369 K-RC1440-C | 481380 K-RC1920-B | K-RC1920-C |
| B, C B, C B, C B C B B, C B, C B, C B, C | 481292 481164 480031 481125 481116 183361 481287 481101 481091 | 4141-1 5318-3 5318-5 1288-001 — 5383-5 4543-000 6244-2 5310 5296-5 | Bolt 5/16" x 1-3/4" (8 Req'd) ① Heat Treated Steel - Grade 8 Endplate (Plain) Endplate ("-G" Type) Gasket, Endplate (1/16"Thick) Gasket, Outer Retainer Plate Gasket, Outer Retainer Plate Gasket, Outlet Screen (Felt) Nut - 5/16" (8 Req'd) Pipe Plug ("-G") Plate, Core Positioning (Solid) | IN KIT X X X X X X X X X X X X X X X X X X X | K-RC1440-B | 481369 K-RC1440-C | 481380 K-RC1920-B | K-RC1920-C |
| B, C B, C B, C B C B B, C B, C B, C B, C | 481292 481164 480031 481125 481116 183361 481287 481101 481091 481093 | 4141-1 5318-3 5318-5 1288-001 — 5383-5 4543-000 6244-2 5310 5296-5 5296-3 | Bolt 5/16" x 1-3/4" (8 Req'd) ① Heat Treated Steel - Grade 8 Endplate (Plain) Endplate ("-G" Type) Gasket, Endplate (1/16"Thick) Gasket, Outer Retainer Plate Gasket, Outer Retainer Plate Gasket, Outlet Screen (Felt) Nut - 5/16" (8 Req'd) Pipe Plug ("-G") Plate, Core Positioning (Solid) Plate, Core Spacer | IN KIT X X X X X X X X X X X X X X X X X X X | K-RC1440-B | 481369 K-RC1440-C | 481380 K-RC1920-B | K-RC1920-C |
| B, C B, C B, C B C B B, C B, C B, C B, C | 481292 481164 480031 481125 481116 183361 481287 481101 481091 481093 481095 | 4141-1 5318-3 5318-5 1288-001 — 5383-5 4543-000 6244-2 5310 5296-5 5296-3 5296-4 | Bolt 5/16" x 1-3/4" (8 Req'd) ① Heat Treated Steel - Grade 8 Endplate (Plain) Endplate ("-G" Type) Gasket, Endplate (1/16"Thick) Gasket, Outer Retainer Plate Gasket, Outer Retainer Plate Gasket, Outlet Screen (Felt) Nut - 5/16" (8 Req'd) Pipe Plug ("-G") Plate, Core Positioning (Solid) Plate, Core Spacer Plate, Outlet Core Retainer | IN KIT X X X X X X X X X X X X X X X X X X X | K-RC1440-B | 481369 K-RC1440-C | 481380 K-RC1920-B | K-RC1920-C |
| B, C B, C B, C B C B B, C B, C B, C B, C | 481292 481164 480031 481125 481116 183361 481287 481101 481091 481093 481095 481090 | 4141-1 5318-3 5318-5 1288-001 5383-5 4543-000 6244-2 5310 5296-5 5296-3 5296-4 5295-2 | Bolt 5/16" x 1-3/4" (8 Req'd) ① Heat Treated Steel - Grade 8 Endplate (Plain) Endplate ("-G" Type) Gasket, Endplate (1/16"Thick) Gasket, Outer Retainer Plate Gasket, Outer Retainer Plate Gasket, Outlet Screen (Felt) Nut - 5/16" (8 Req'd) Pipe Plug ("-G") Plate, Core Positioning (Solid) Plate, Core Spacer Plate, Outlet Core Retainer Plate, Outlet Core Retainer | IN KIT X X X X X X X X X X X X X X X X X X X | K-RC1440-B | 481369 K-RC1440-C | 481380 K-RC1920-B | K-RC1920-C |
| B, C B, C B, C B C B, C B, C B, C B, C B | 481292 481164 480031 481125 481116 183361 481287 481101 481091 481093 481095 481090 481276 | 4141-1 5318-3 5318-5 1288-001 5383-5 4543-000 6244-2 5310 5296-5 5296-3 5296-4 5295-2 6172-6 | Bolt 5/16" x 1-3/4" (8 Req'd) ① Heat Treated Steel - Grade 8 Endplate (Plain) Endplate ("-G" Type) Gasket, Endplate (1/16"Thick) Gasket, Outer Retainer Plate Gasket, Outer Retainer Plate Gasket, Outlet Screen (Felt) Nut - 5/16" (8 Req'd) Pipe Plug ("-G") Plate, Core Positioning (Solid) Plate, Core Spacer Plate, Outlet Core Retainer Plate, Outlet Core Retainer Screen, Outlet - 10 Mesh | IN KIT X X X X X X X X X X X X X X X X X X X | K-RC1440-B | 481369 K-RC1440-C | 481380 K-RC1920-B | K-RC1920-C |
| B, C B, C B, C B C B, C B, C B, C B, C B | 481292 481164 480031 481125 481116 183361 481287 481101 481091 481093 481095 481090 481276 481272 | 4141-1 5318-3 5318-5 1288-001 5383-5 4543-000 6244-2 5310 5296-5 5296-3 5296-4 5295-2 6172-6 6171-5 | Bolt 5/16" x 1-3/4" (8 Req'd) ① Heat Treated Steel - Grade 8 Endplate (Plain) Endplate ("-G" Type) Gasket, Endplate (1/16"Thick) Gasket, Outer Retainer Plate Gasket, Outer Retainer Plate Gasket, Outlet Screen (Felt) Nut - 5/16" (8 Req'd) Pipe Plug ("-G") Plate, Core Positioning (Solid) Plate, Core Spacer Plate, Outlet Core Retainer Plate, Outlet Core Retainer Screen, Outlet - 10 Mesh Screen, Outlet - 100 Mesh | IN KIT X X X X X X X X X X X X X X X X X X X | K-RC1440-B | 481369 K-RC1440-C | 481380 K-RC1920-B | K-RC1920-C |
| B, C B, C B, C B C B, C B, C B, C B, C B | 481292 481164 480031 481125 481116 183361 481287 481101 481091 481093 481095 481090 481276 481272 481203 | 4141-1 5318-3 5318-5 1288-001 5383-5 4543-000 6244-2 5310 5296-5 5296-3 5296-4 5295-2 6172-6 6171-5 5806.1 | Bolt 5/16" x 1-3/4" (8 Req'd) ① Heat Treated Steel - Grade 8 Endplate (Plain) Endplate ("-G" Type) Gasket, Endplate (1/16"Thick) Gasket, Outer Retainer Plate Gasket, Outer Retainer Plate Gasket, Outlet Screen (Felt) Nut - 5/16" (8 Req'd) Pipe Plug ("-G") Plate, Core Positioning (Solid) Plate, Core Spacer Plate, Outlet Core Retainer Plate, Outlet Core Retainer Screen, Outlet - 10 Mesh Screen, Outlet - 100 Mesh Spring, End | IN KIT X X X X X X X X X X X X X X X X X X X | K-RC1440-B | 481369 K-RC1440-C | 481380 K-RC1920-B | K-RC1920-C |
| B, C B, C B, C B C B, C B, C B, C B, C B | 481292 481164 480031 481125 481116 183361 481287 481101 481091 481093 481095 481090 481276 481272 | 4141-1 5318-3 5318-5 1288-001 5383-5 4543-000 6244-2 5310 5296-5 5296-3 5296-4 5295-2 6172-6 6171-5 | Bolt 5/16" x 1-3/4" (8 Req'd) ① Heat Treated Steel - Grade 8 Endplate (Plain) Endplate ("-G" Type) Gasket, Endplate (1/16"Thick) Gasket, Outer Retainer Plate Gasket, Outer Retainer Plate Gasket, Outlet Screen (Felt) Nut - 5/16" (8 Req'd) Pipe Plug ("-G") Plate, Core Positioning (Solid) Plate, Core Spacer Plate, Outlet Core Retainer Plate, Outlet Core Retainer Screen, Outlet - 10 Mesh Screen, Outlet - 100 Mesh | IN KIT X X X X X X X X X X X X X X X X X X X | K-RC1440-B | 481369 K-RC1440-C | 481380 K-RC1920-B | K-RC1920-C |

① Grade 8 bolts are used on the C-480 through C-1920 Catch-All shells.

Replaceable Core Catch-All® Filter-Driers C-480 Series through C-1920 Series

See Parts Table on Page 39

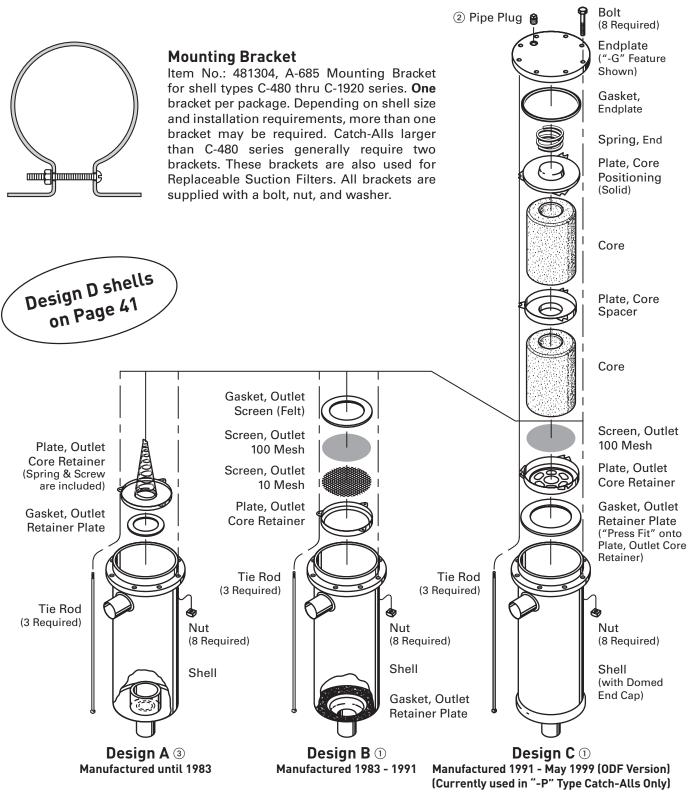

① The B & C/D designs can be differentiated by external shell appearance. The welded cap on the outlet of the shell fits inside the body shell on B versions and it slides over the body shell on C/D versions.

(2) Access valve (P/N: 183174) is available. Valve core (P/N: 480088) can be purchased separately.

③ Design A components are no longer available.

Replaceable Core Catch-All® Filter-Driers C-480 Series through C-1920 Series


| | C-480 I | HROUGH C-1920 REPL/ | ACEABLE | CORE PAI | RTS and PA | ARTS KITS C-1440 | C-1920 |
|----------------------|--------------|--|-------------|--------------------------------|--------------|---------------------------|-------------|
| | | | NOT | SERIES | SERIES | SERIES | SERIES |
| ITEM | | ART NUMBER and | SUPPLIED | | 1 | NUMBER | |
| NUMBER | | DESCRIPTION | IN KIT | 481313 | 481314 | 481315 | 481321 |
| | | | | K-RC480-D | | L PARTS KIT K-RC1440-D | K-RC1920-D |
| | | Bolt 5/16" x 1-3/4" | | K-110-00-D | K-HOJOO-D | K-1101440-D | K-1101320-D |
| 481292 | 4141-1 | (8 Reg'd) Grade 8 ① | X | | | | |
| 481287 | 6244-2 | Nut 5/16" (8 Req'd) Grade 8 | Х | | | | |
| 480077 | 5318-1 | End Plate (Plain) | Х | | | | |
| 480031 | 5318-5 | End Plate ("-G" Type) | Х | | | | |
| 481101 | 5310 | Pipe Plug ("-G") | Х | | | | |
| 481125 | 1288-001 | Gasket, End Plate (1/16" Thick) | х | | | | |
| 481116 | 5383-5 | Gasket, Outlet Retainer Plate | | 1 | 1 | 1 | 1 |
| 480016 | JP-741-000 | C-480 Outlet Plate Assembly | | 1 | | | |
| 480018 | JP-741-001 | C-960 Outlet Plate Assembly | | | 1 | | |
| 480020 | JP-741-002 | C-1440 Outlet Plate Assembly | | | | 1 | |
| 480022 | JP-741-003 | C-19200 Outlet Plate Assembly | | | | | 1 |
| 480024 | JP-738-000 | Plate, Inlet | | 1 | 1 | 1 | 1 |
| 480026 | | | | | 1 | 2 | 3 |
| 480028 | JP-743-000 | Screw | | 1 | 1 | 1 | 1 |
| 481203 | 5806-1 | End Spring | | 1 | 1 | 1 | 1 |
| | 1 | OPTIONAL SECONDAR | 1 | | | r | |
| | FIL | TER PART NUMBER | | DESCRIPTIO | | | REQUIRED |
| 481461 | | FS-480 | | or C-480 Seri | | | 1 |
| 481462 | | FS-960 | | or C-960 Seri | | | 1 |
| 481463 481464 | | FS-1440 FS-19200 | | or C-1440 Ser or C-1920 Ser | | | 1 1 |
| | | | | | | | I |
| | | e used on the C-480 thro required for each interna | 0 | | | | condary |
| | 0 | , Item No. 183702, P/N 6 | | | | | condury |
| | 0 | m No. 183174) is availab | | | | | rchased |
| separa | ately. | | | | | • | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| revious | Designs - I | Parts kits for the new int | ernal cons | struction fit | t in shell D | esigns B an | d C. |
| onvertir /N 5383- | 0 | sign B requires a thicker | outlet ret | ainer plate | gasket, Ite | m No. 4811 | 15, |
| he new | internal co | nstruction cannot be use | ed in Desig | gn A shells | 6. | | |
| he B and | d C/D desig | ns can be differentiated | by extern | al shell anı | nearance . | The welded | end can |
| n the ou | Itlet of the | shell fits inside the body sions (see illustrations o | shell on t | he B versio | | | • |
| | _ | Mounting Bracke | - | | | | |
| (| // | tem No.: 481304, A-685 | | Bracket fo | r shell type | s C-480 thr | u C-1920 |
| |) s | series. One bracket per | package. I | Depending | on shell s | size and ins | tallation |

Item No.: 481304, A-685 Mounting Bracket for shell types C-480 thru C-1920 series. **One** bracket per package. Depending on shell size and installation requirements, more than one bracket may be required. Catch-Alls larger than C-480 series generally require two brackets. These brackets are also used for Replaceable Suction Filters. All brackets are supplied with a bolt, nut, and washer.

Design D Manufactured June 1999 - Present (Liquid Line Only)


Replaceable Core Catch-All® Filter-Driers C-30000 and C-40000 Series

| | | C-30000 and C-40000 REPLACEMENT PART | S and PARTS KITS | | |
|----------------|----------|--|------------------|--------------------------|-------------------------|
| | | | NOT | C-30000 SERIES ITEM N | C-40000 SERIES UMBER |
| ITEM NUMBER | | PART NUMBER and DESCRIPTION | SUPPLIED | 481390 | 481400 |
| NOMBEN | | | IN KIT | INTERNAL | PARTS KIT |
| | | | | K-RC300 | K-RC400 |
| 481293 | 4103-15 | Bolt 3/8" x 2-1/4" (10 Req'd) Heat Treated Steel - Zinc Plated, Grade 5 ① | Х | | |
| 481197 | 6278-1 | Endplate (Plain) | Х | | |
| 481200 | 6278-3 | Endplate ("-G") | Х | | |
| 480096 | 1288-013 | Gasket, Endplate (1/16" Thick) | Х | | |
| 481151 | 6230-1 | Gasket, Outlet Retainer Plate | | 1 | 1 |
| 481286 | 6244-3 | Nut, 3/8" (10 Req'd) | Х | | |
| 481101 | 5310 | Pipe Plug ("-G") | Х | | |
| 481211 | 6260-5 | Plate, Core Positioning (Solid) | | 1 | 1 |
| 481213 | 6260-6 | Plate, Core Spacer | | 2 | 3 |
| 481212 | 6273-1 | Plate, Outlet Core Retainer | | 1 | 1 |
| 481264 | 6242-1 | Spring, End | | 1 | 1 |
| 481244 | 6243-2 | Tie Rod C-30000 | | 3 | |
| 481248 | 6243-1 | Tie Rod C-40000 | | | 3 |

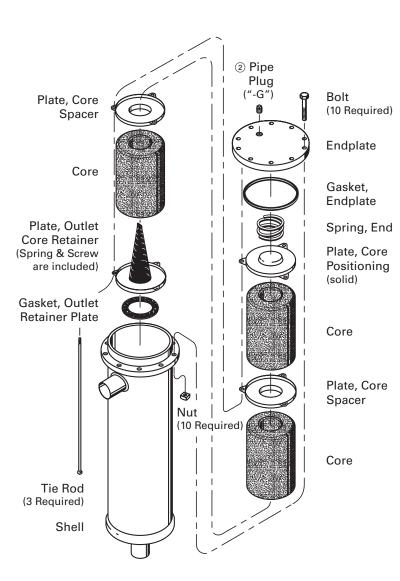

① Grade 5 bolts are used on the C-30000 and C-40000 Catch-All shells.

② Access valve (P/N: 183174) is available. Valve core (P/N: 480088) can be purchased separately.




Mounting Bracket

Item No.: 481308, A-175-2 Mounting Bracket for shell types C-30000 and C-40000 series. **Two** brackets per package. Two brackets are generally adequate for mounting these large Catch-Alls. All brackets are supplied with a bolt, nut, and washer.

Replaceable Suction Filters RSF-480 and RSF-960 Series

| | RSF-480 and RSF-960 REPLACEMENT PARTS and PARTS KITS | | | | | | | | | | | |
|--------|--|----------|--|----------|-------------|------------|------------|------------|--|--|--|--|
| | | | | | RSF-480 | SERIES | RSF-960 | SERIES | | | | |
| | 17584 | | | NOT | ITEM NUMBER | | | | | | | |
| DESIGN | ITEM NUMBER | P/ | ART NUMBER and DESCRIPTION | SUPPLIED | 801000 | 481404 | 801050 | 481406 | | | | |
| | NUNDER | | | IN KIT | | INTERNAL | PARTS KIT | • | | | | |
| | | | | | K-RSF480-B | K-RSF480-C | K-RSF960-B | K-RSF960-C | | | | |
| B, C | 183174 | | Access Valve Kit (1/4" SAE x 1/4" NPT) ② | Х | | | | | | | | |
| B, C | 481292 | 4141-1 | Bolt 5/16" x 1-3/4" (8 Req'd) Grade 8 | Х | | | | | | | | |
| B, C | 480031 | 5318-5 | Endplate | Х | | | | | | | | |
| B, C | 481125 | 1288-001 | Gasket, Endplate (1/16" Thick) | Х | | | | | | | | |
| В | — | | Gasket, Outlet Retainer Plate | | 1 | | 1 | | | | | |
| С | 481116 | 5383-5 | Gasket, Outlet Retainer Plate | | | 1 | | 1 | | | | |
| С | 481117 | 5383-6 | Gasket, Outlet Screen | | | 1 | | 1 | | | | |
| В, С | 481287 | 6244-2 | Nut 5/16" (8 Req'd) Grade 8 | Х | | | | | | | | |
| В, С | 481088 | 5289-1 | Plate, Element Positioning (Solid) | | 1 | 1 | 1 | 1 | | | | |
| С | 481089 | 5295-3 | Plate, Outlet Retainer | | | 1 | | 1 | | | | |
| В, С | 481095 | 5296-4 | Plate, Retainer (1 to 3 Req'd) | | 1 | | 3 | 2 | | | | |
| В | 481276 | 6172-6 | Screen, Outlet - 10 Mesh | | 1 | | 1 | | | | | |
| С | 481276 | 6172-6 | Screen, Outlet - 10 Mesh | | | 1 | | 1 | | | | |
| В, С | 481272 | 6171-5 | Screen, Outlet - 100 Mesh ③ | Х | | | | | | | | |
| В, С | 481260 | 4602-5 | Spring, Element Retainer | | 3 | 3 | 6 | 6 | | | | |
| В, С | 481203 | 5806-1 | Spring, End | | 1 | 1 | 1 | 1 | | | | |

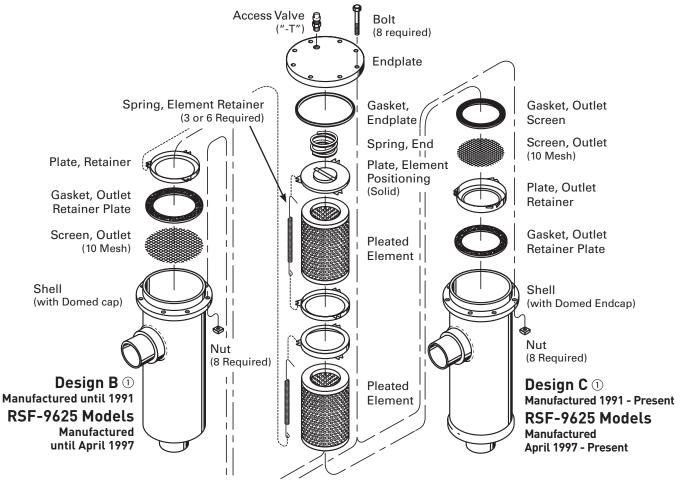

① The B and C designs can be differentiated by external shell appearance. The welded end cap on the outlet of the shell fits inside the body shell on the B versions and it slides over the body shell on the C versions.

(2) Access valve kit includes valve core and cap. Valve core can be purchased separately (P/N: 480088).

③ When using replaceable suction filters with cores (i.e. RC-4864, RCW-48 or RC-4864-HH) remember to use the 100 mesh safety screen.

Pressure Regulating Valves (S)ORIT-12, -15, -20

| | | (S)ORIT REPLACEMENT PARTS and PARTS KITS | | | | | | |
|--------|----------------|--|----|------|---------|----------|-----------|----|
| | | | | | LVE TYP | PE and S | | |
| ITEM | | PART NUMBER and DESCRIPTION | | ORIT | | | SORIT | |
| NUMBER | | DRAWING ON PAGE 45 | 12 | 15 | 20 | | 15 PED | 20 |
| | <u> </u> | REPLACEMENT PARTS SOLD SEPARATELY | | 00 | ANTIT | neuoli | neD | |
| 958070 | 2421-000 | | | 1 | | | 1 | |
| 958071 | 2422-000 | Adaptor | | | 1 | | | 1 |
| 183130 | 1806-102 | Adjustment Screw | 1 | 1 | 1 | 1 | 1 | 1 |
| 958173 | 2420-002 | | | 1 | | | 1 | |
| 958174 | 2423-002 | Body Flange | | | 1 | | | 1 |
| 958101 | 1390-000 | Coil Screw | | | | 1 | 1 | 1 |
| _ | 5014-xxx | Valve Nameplate (Specify Valve Type, Voltage & Frequency) | | | | 1 | 1 | 1 |
| 908024 | A-4 0/100 | Element | 1 | 1 | 1 | 1 | 1 | 1 |
| 908073 | A-4 75/150 | Element | 1 | 1 | 1 | 1 | 1 | 1 |
| 183058 | 2625-001 | | | | 4 | | | 4 |
| 183060 | 2625-002 | Cap Screw | | 4 | | | 4 | |
| _ | MKC-1 | Coil, specify voltage & frequency | | | | 1 | 1 | 1 |
| 183604 | 2539-000 | Adaptor Gasket - Wolverine | | | 1 | | | 1 |
| 183675 | 2645-000 | Adaptor Gasket - Tetraseal | 1 | 1 | | 1 | 1 | |
| 183184 | 4323-000 | Gasket (Enclosing Tube Locknut Style From Date Code 3998 to Present) | | | | 1 | 1 | 1 |
| 183690 | 621-016 | O-Ring (Enclosing Tube Locknut Style Prior to Date Code 3898) Not Shown | | | | 1 | 1 | 1 |
| 183685 | 621-014 | O-Ring (Enclosing Tube 4 Screw Style Only) Not Shown | | | | 1 | 1 | 1 |
| 382170 | 13681-1 | Locknut | 1 | | | 1 | | |
| 183602 | 621-028 | | | 1 | | | 1 | |
| 183607 | 4508-031 | O-Ring | | | 1 | | | 1 |
| 958042 | 2445-000 | Strainer | 1 | 1 | 1 | 1 | 1 | 1 |
| 481140 | JP-543-002 ① | Copper Flare Gasket | | | 1 | 1 | L | 1 |
| | | REPLACEMENT PARTS KITS | | | | | | |
| | | PILOT ASSEMBLY KITS | | | | | | |
| 958016 | K-Y1005-1 | All Kits include: Pilot Assembly, Inlet Strainer, Gaskets, Tetraseal and | | | | 1 | 1 | 1 |
| 958002 | K-Y1010 | Screws | 1 | 1 | 1 | | | |
| | | INTERNAL PARTS KITS | | | · | | | |
| 958005 | KS-0RI-12 2 | All Kits include: Gasket(s), Piston and Spring. The KS-ORI-12 also | 1 | | | 1 | | |
| 958007 | KS-ORI/CDA-15 | includes the Adaptor. The KS-ORI/CDA-15, KS-ORI/CDA-20 and | | 1 | | | 1 | |
| 958009 | KS-ORI/CDA-20 | KS-SHGB-15 also include a Body Sleeve & O-Ring | | | 1 | | | 1 |
| | | CDA TO SORIT CONVERSION KITS | | | | | | |
| 958076 | KSM-ORIT-12 | | 1 | | | | | |
| 958078 | KSM-ORIT-15 | | | 1 | | | | |
| 958080 | KSM-ORIT-20 | All Kits include: Pilot Assembly Kit and Adaptor. KSM-(S)ORIT-15 & 20 also include: Body Flange. KSM-(S)ORIT-12 also includes: Piston & | | | 1 | | | |
| 958075 | KSM-SORIT-12 ③ | Locknut | | | | 1 | | |
| 958077 | KSM-SORIT-15 3 | | | | | | 1 | |
| 958079 | KSM-SORIT-20 3 | | | | | | | 1 |


1 This part may be necessary to adapt a new (S)ORIT Pilot to some obsolete values.

② Replacement (S)ORIT-12 Internal Parts are only compatible with the Y1005 and Y1010 Pilot Valves. When using these parts with obsolete Pilot Valves, the Pilot Valves must also be replaced

③ If ordering an ORIT to (S)ORIT CONVERSION KIT or a CDA to SORIT CONVERSION KIT, an MKC-1 coil is required. Order coil as a separate item and specify electrical specifications.


Pressure Regulating Valves (S)ORIT-12, -15, -20

See Parts Table on Page 44

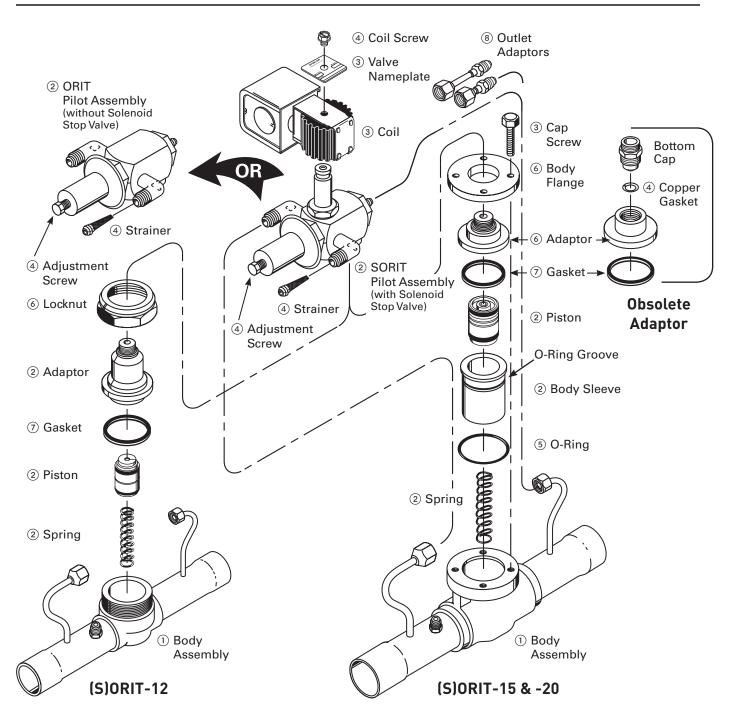

- ① Replacement part **not** available.
- ② Part is **not** available separately, but **is** included with the Parts Kit. See Page 44.
- ③ Part is available separately. See Page 44.
- ④ Part is available separately, and is also included with the Pilot Assembly Kit. See Page 44.
- (5) Part is available separately and is also included with the Internal Parts Kit. See Page 44.
- (6) Part is available separately and is also included with the CDA to SORIT CONVERSION KIT. See Page 44. Adapter for Y896 is no longer available.
- ⑦ Part is available separately and is also included with the Pilot Assembly Kit and the Internal Parts Kit. See Page 44.
- ⑧ Outlet adaptors applied to original (S)ORIT-15 and -20 (1981-1983). The components are no longer available. Fabricate in the field as required.

Pressure Regulating Valves (S)ORIT-PI-2, -3, -4, -5

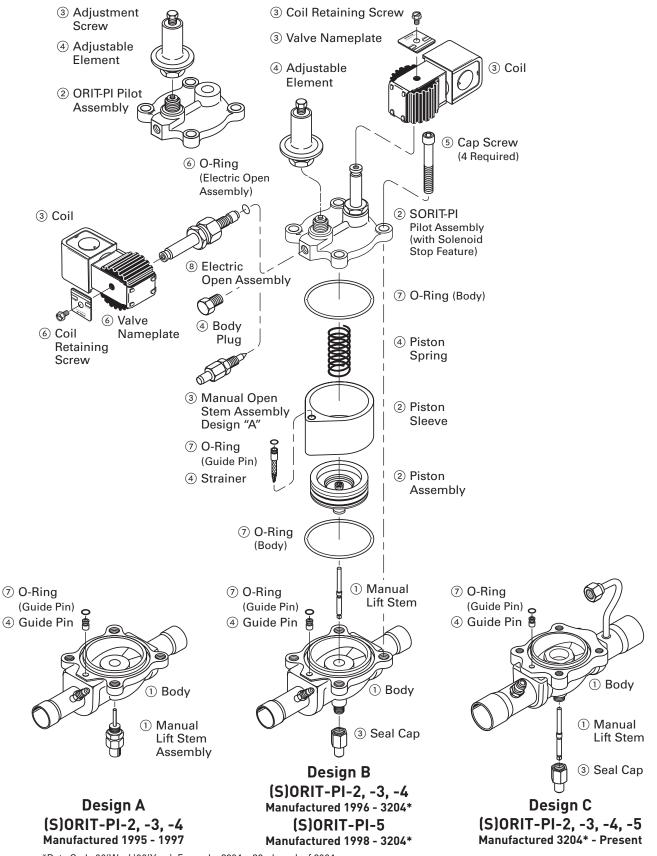

*Date Code 00(Week)00(Year), Example: 3204 = 32nd week of 2004

Pressure Regulating Valves (S)ORIT-PI-2, -3, -4, -5

| | | | VALVE | TYPE |
|-------------|----------------------|--|----------|----------|
| ITEM NO. | | PART NUMBER and DESCRIPTION DRAWING ON PAGE 46 | ORIT-PI | SORIT-P |
| NU. | | DRAWING UN PAGE 46 | QUANTITY | REQUIRED |
| | | REPLACEMENT PARTS SOLD SEPARATELY | | |
| 480088 | 5853-000 | Access Valve Core (Not shown) | 1 | 1 |
| 908024 | A-4-0/100 | Adjustable Element | 1 | 1 |
| 908073 | A-4-75/150 | Adjustable Element | 1 | 1 |
| 183130 | 1806-002 | Adjustment Screw | 1 | 1 |
| 958121 | 4089-000 | Body Plug | 1 | 1 |
| 958086 | JP-2520-003 | Cap, Access Valve (Not Shown) | 1 | 1 |
| 958171 | 506-012 | Cap Screws, Socket Head | 4 | 4 |
| _ | MKC-1* | Coil, specify voltage & frequency | | 1 |
| 958101 | 1390-000* | Coil Retaining Screw | | 1 |
| 958089 | 3743-000 | Guide Pin | 1 | 1 |
| _ | 2000-10 | Manual Open Stem Assembly (Required for Design "A" Only) | 1 | 1 |
| 958092 | 621-143 | O-Ring - Body | 2 | 2 |
| 958147 | 4508-010 | O-Ring - Guide Pin | 2 | 2 |
| 958147 | 4508-010 | O-Ring - Electric Open Assembly | 1 | 1 |
| 183184 | 4323-000 | Gasket - Enclosing Tube (Not Shown) For Date Codes 3598 to Present | — | 1 |
| 183690 | 621-016 | O-Ring - Enclosing Tube (Not Shown) For Date Codes through 3498 | — | 1 |
| 183184 | 4323-000 | Gasket - Electric Open Enclosing Tube (Not Shown) For Date Codes 3798 to Present | 1 | 1 |
| 183690 | 621-016 | 0-Ring - Electric Open Enclosing Tube (Not Shown) For Date Codes through 3698 | 1 | 1 |
| 958094 | 3742-000 | Piston Spring | 1 | 1 |
| 183200 | 4169-000 | Seal Cap | 1 | 1 |
| 183154 | 4269-000 | Strainer (200 mesh) | 1 | 1 |
| _ | 5014-xxx | Valve Nameplate (Specify valve type, voltage, & frequency) | — | 1 |
| — | 5773-006 | Valve Nameplate, Electric Open (Specify voltage & frequency) **** | 1 | 1 |
| | | REPLACEMENT PARTS KITS | | |
| 381610 | RK-ORIT-PI-2-0/100 | | | |
| 381611 | RK-ORIT-PI-2-75/150 | | | |
| 381612 | RK-ORIT-PI-3-0/100 | All Kits include: | | |
| 381614 | RK-ORIT-PI-3-75/150 | Pilot Assembly | | |
| 381615 | RK-ORIT-PI-4-0/100 | Pilot Assembly Piston Sleeve | | |
| 381616 | RK-ORIT-PI-4-75/150 | Equalizer and Pilot Tube with 1/4 SAE Flare Nut | | |
| 381617 | RK-ORIT-PI-5-0/100 | Body O-Ring (2) | | |
| 381618 | RK-ORIT-PI-5-75/150 | - Guide Pin O-Ring (2) | 1 | 1 |
| 381603 | RK-SORIT-PI-2-0/100 | Strainer | | I |
| 381606 | RK-SORIT-PI-2-75/150 | Piston Assembly | | |
| 381602 | RK-SORIT-PI-3-0/100 | - Piston Spring | | |
| 381605 | RK-SORIT-PI-3-75/150 | Guide Pin | | |
| 381604 | RK-SORIT-PI-4-0/100 | - Cap Screw (4) | | |
| 381607 | RK-SORIT-PI-4-75/150 | | | |
| 381608 | RK-SORIT-PI-5-0/100 | | | |
| 381609 | RK-SORIT-PI-5-75/150 | | | |
| 958088 | K-PI-E | Electric Open Assembly (Includes Nameplate, Coil Retaining Screw) | 1 1 | 1 |

Notes for drawing on Page 46.

① Replacement part **not** available.

Part is not available separately, but is included with the Replacement Parts Kit. See Table above.

- ③ Part is available separately. See Table above.
- ④ Part is available separately and is also included with the Replacement Parts Kit. See Table above.
- ⑤ Part is available separately, however 4 cap screws are included in the Replacement Parts Kit. See Table above.
- ⑥ Part is available separately and is also included with the K-PI-E Electric Open Assembly. See Table above.
- ⑦ Part is available separately and is also included with the Replacement Parts Kit and O-Ring Kit. See Table above.
- 8 Part is not available separately but is included with the K-PI-E Electric Open Assembly. See Table above.

| | (S)ORIT-PI CA | PACITY CONV | ERSION KI | T*** |
|-----------------------|-----------------------|-------------------------|---------------------|---------------------------------|
| CURRENT VALVE SIZE | DESIRED VALVE SIZE | REMOVE Existing seat | INSTALL NEW SEAT | PISTON ASSEMBLY AND SEAT KIT |
| (S)ORIT-PI-2 | (S)ORIT-PI-3 | Yes | Yes | SK-PI-4 to 3 |
| (S)ORIT-PI-2 | (S)ORIT-PI-4 | Yes | No | SK-PI-4** |
| (S)ORIT-PI-3 | (S)ORIT-PI-2 | Yes | Yes | SK-PI-4 to 2 |
| (S)ORIT-PI-3 | (S)ORIT-PI-4 | Yes | No | SK-PI-4** |
| (S)ORIT-PI-4 | (S)ORIT-PI-2 | N/A | Yes | SK-PI-4 to 2 |
| (S)ORIT-PI-4 | (S)ORIT-PI-3 | N/A | Yes | SK-PI-4 to 3 |
| (S)ORIT-PI-5 | (S)ORIT-PI-3 | N/A | Yes | SK-PI-5 to 3 |
| (S)ORIT-PI-5 | (S)ORIT-PI-4 | N/A | Yes | SK-PI-5 to 4 |

* Increase quantity required by one when electric open assembly is used.

** Seat not supplied or required.

*** For product with date code 3204 or later. Date Code 00(Week)00(Year), Example: 3204 = 32nd week of 2004


**** Enclosing tube gasket in not included with kit.

Pressure Regulating Valves (A)DRI(E), (A)DRS(E), (A)DRP(E) and (A)DRH(E)

| | | REPL | | Adjustable | | | | | | | |
|---|-------------------------------------|--|------------|-------------------|--------------|---------------|------------|------------|------------|---|-------------------|
| ITCAA | DADT | | | | VA | LVE TYPE | | | | Element | |
| ITEM NO. | | NUMBER and SCRIPTION | (A)DRI(E) | (A)DRS(E)-2 | (A)DRP(E)-3 | (A)DRH(E)-6 | DRS(E)-2 | DRP(E)-3 | DRH(E)-6 | | $\overline{(-)}$ |
| | | | | QUANTITY REQUIRED | | | | | ③ Seal Cap | | |
| | | | PLACEME | NT PARTS SC | OLD SEPARA | TELY | | | | | |
| 183701 | 621-024 | 0-Ring | | 1 | 1 | 1 | | | | ③ O-Ring | \frown |
| | 1373-000 558-000 | Seal Cap | | 1 | 1 | 1 | | | 1 | 3 O-hing | |
| 183157 | 559-000 | | | | 1 | - | | | 1 | () A diveting | |
| | 561-000 | Lower Spring | | | | | | 1 | | Adjusting Screw | |
| 183169 | 696-000 | | | 1 | | | 1 | | | Sciew | $\overline{\bot}$ |
| 183145 | 1031-000 | | 1 | | | | | | | | © |
| | 1524-000 | Inlet Str. 3/8 ODF | 1 | - | | | | | | | |
| | 877-003 | Inlet Str. 3/8 ODF | | 1 | 1 | | 1 | 1 | | ② Spring | |
| | 877-004 877-005 | Inlet Str. 1/2 ODF Inlet Str. 5/8 ODF | | 1 | 1 | 1 | 1 | 1 | 1 | | |
| | 877-005 | Inlet Str. 7/8 ODF | | I | 1 | 1 | 1 | 1 | 1 | | |
| | 877-009 | Inlet Str. 1-1/8 ODF | | | | 1 | | | 1 | ① Spring | \rightarrow |
| | | | ENT SPRIN | IG KITS (FOR | ADJUSTABL | E ELEMENTS |) | | | Guide | |
| | K-1800E-1 | 0/30 Adj. Range | | 1 | 1 | 1 | | | | Caldo | |
| 908025 | K-1800E-2 | 0/80 Adj. Range | | 1 | 1 | 1 | | | | | |
| | | | | ACEMENT EL | EMENTS | | | | | ④ Adjustable | |
| | A-4-*** | A 12 - 14 | 1 | 1 | | | | | | Element | |
| | A-8-* A-3-* | Adjustable | | 1 | 1 | 1 | | | | (Spring | |
| | B-3P-**AR | Adjustable | | | I | 1 | | 1 | | Type) | |
| | | Remote Bulb | | | | | | 1 | 1 | | |
| | D-8-*** | | | | | | 1 | | | | |
| | D-3P-*** | Non-Adjustable | | | | | | 1 | | | |
| — | D-3H-*** | Dome | | | | | | | 1 | | |
| | R-8-*** | Non-Adjustable | | | | | 1 | | | | h l |
| | R-3P-*** | Bulb | | | | | | 1 | | | 11 |
| | R-3H-*** | | | | | | | | 1 | ⑤ Pushrod | |
| | | | REPLACEN | ENT INTERN | AL PARTS KI | TS | <u></u> | | | I rusiliou | |
| | | Includes: Pushrod, Piston Assembly, | | | | | | | | | U U |
| 908043 | KH-6 | Lower Spring, | | | | 1 | | | 1 | 0 | |
| | | Bottom Cap | | | | | | | | | |
| * Sp | ecify 0/30 or | r 0/80 adjustment ra | nge. | | | | | | | | |
| | ecify 25/35, ecify pressu | 32/44, 55/70, 50/65, | or 65/80 a | djustment ra | nge. | | | | | ① Body | |
| Sμ | | /75 or 0/100 adjustm | nent range | . Available f | or replaceab | le element st | vle valves | s only. Th | e desian | | K/Id |
| | | aceable elements be | | | | | ., | , | j.: | , | |
| ~ - . | | | | | | | | | | | |
| | • | art not available. | | // | | 4 | Non-A | | | | |
| | | lable separately, I he Replacement S | | (((| (OF)) | | | note Bul | | | |
| | | e Replacement Ele | | | \bigcirc | | lype | Elemei | nt | 5 Pin Carrier | |
| | Table above | • | | | \leq | | n | | | Piston | |
| ③ Part | is available | e separately. See | Table | | / | K) |]] | | | Assembly | |
| abov | ••• | | | | | | // | | | | |
| ④ Part is available as a replacement ele- | | | | | | | | | | | <u>s</u> |
| | ment. See Table above. 5 Adjustable | | | | | | | | | | X |
| 5 Part available for (A)DRHE-6 only in KH-6 kit. Remote Bulb Type Element | | | | | | | | | | Spring | الالالال |
| Type Element | | | | | | | | | it. | 1 Lower | <u> </u> |
| | | | | | | | | | | | |
| | | | | \bigcirc | U | | _ | \frown | | Spring Guide | |
| | | | | | | | | | | Guide | |
| | | | | (4) No | n-Adiusta | ble Dome | | Ð |)) | 5 Bottom | |
| | | | | 0.10 | | e Element | | | 1 | Сар | |

Type Element


Pressure Regulating Valves HGB(E)-1, -5, -6

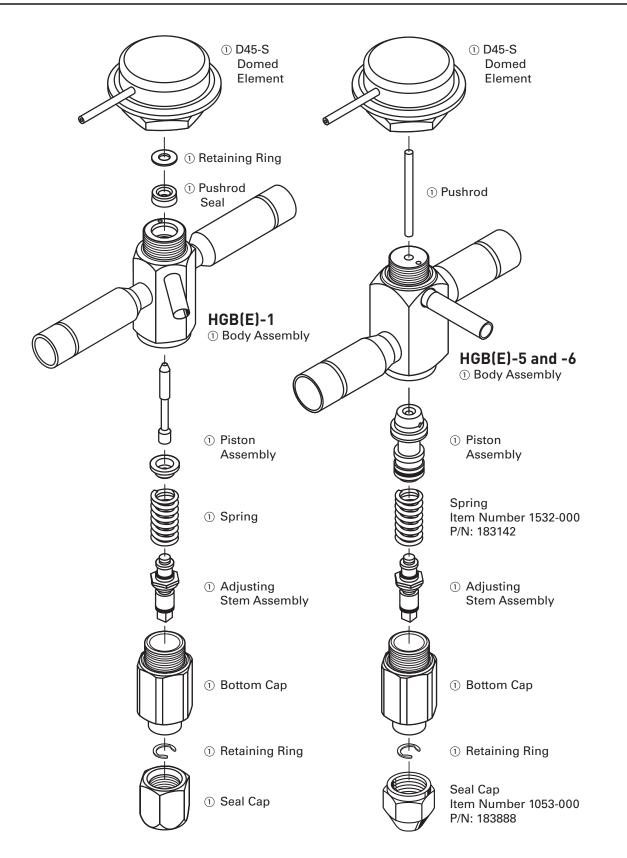


Pressure Regulating Valves (S)HGB(E)-8

| ITEM NUMBER | PART NUM | BER and DESCRIPTION | QUANTITY REQUIRED |
|--|--|---|----------------------|
| | REPLACEMENT | PARTS SOLD SEPARATELY | |
| 908024 | A-4-0/100 | Adjustable Element | 1 |
| 908073 | A-4-75/150 | - | |
| 958101 | 1390-000 | Coil Screw | 1 |
| — | MKC-1 Coil | MKC-1 Coil (Specify Voltage & Frequency) | 1 |
| 183620 | 123-002 | Gasket | 1 |
| — | 5041-000 | Valve Nameplate (SHGB-8) (Specify Voltage & Frequency) | 1 |
| _ | 5041-001 | Valve Nameplate (SHGBE-8) (Specify Voltage & Frequency) | 1 |
| | REPLAC | EMENT PARTS KITS | |
| | PILC | T ASSEMBLY KIT | |
| 958157 | K-(S)HGB(E)-8-0/75 | Includes: Pilot Valve | |
| 958156 | K-HGB(E)-8-75/150 | Assembly, Coil Screw, and | 1 |
| 958110 | K-(S)HGB(E)-8-0/100 | Valve Nameplate | |
| | INTI | ERNAL PARTS KIT | |
| 958120 | KS-(S)HGB(E)-8* | Includes: Adaptor, Gasket, Spring and Piston | 1 |
| The KS-(the HGB(| | s used with both the SHGB(E)-8 | and |
| Part is the Pa Part is | rts Kit. not available sepa | rately, but is included with rately, but is included with | |
|) Part is the Pil) Part is) Part is | not available sepa ot Assembly Parts available separate | Kit. ly. ly and is also included with | |

(6) Part is **not** available separately but **is** included with the Pilot Assembly Kit and the Internal Parts Kit.

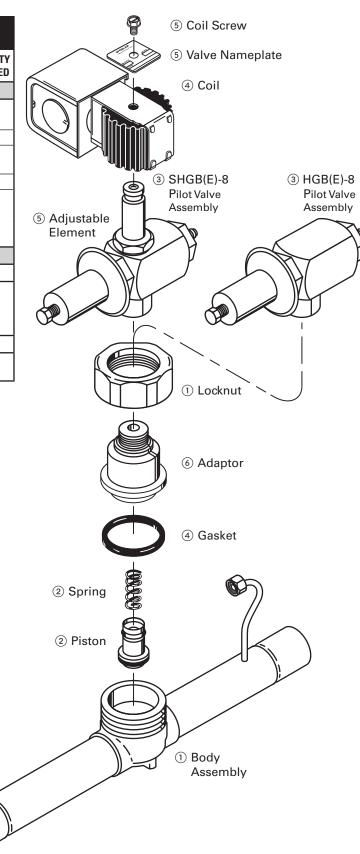

Pressure Regulating Valves SHGB(E)-15

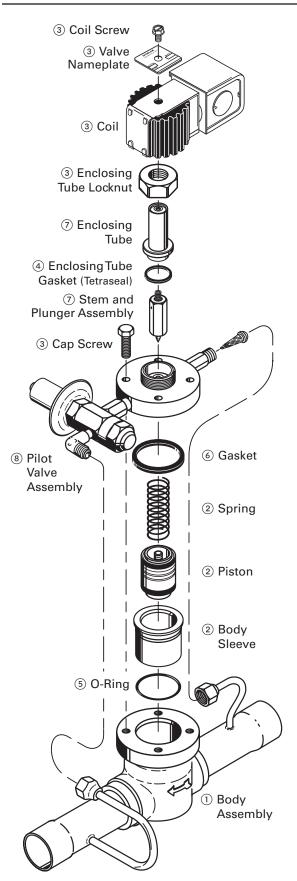

| | SHGB(E)-15-0/75 REPLACEMENT PARTS and PARTS KITS | | | | | |
|----------------|---|---|----------------------|--|--|--|
| ITEM NUMBER | PAR | T NUMBER and DESCRIPTION | QUANTITY REQUIRED | | | |
| | REPLACEMENT PARTS SOLD SEPARATELY | | | | | |
| 908024 | A-4-0/75 | Adjustable Element | 1 | | | |
| 183060 | 2625-002 | Cap Screw | 4 | | | |
| 958101 | 1390-000 | Coil Screw | 1 | | | |
| _ | MKC-2 Coil | MKC-2 Coil (Specify Voltage & Frequency) | 1 | | | |
| 183660 | 641-3* | Enclosing Tube Gasket | 1 | | | |
| 382150 | 13252-1 | Enclosing Tube Locknut | 1 | | | |
| 183675 | 2645-000 | Gasket | 1 | | | |
| 183602 | 621-028 | O-Ring | 1 | | | |
| 958042 | 2445-000 | Strainer | 1 | | | |
| _ | 548-001 | Valve Nameplate (SHGB) (Specify Voltage & Frequency) | 1 | | | |
| _ | 548-003 | Valve Nameplate (SHGBE) (Specify Voltage & Frequency) | 1 | | | |
| | R | EPLACEMENT PARTS KITS | | | | |
| | | PILOT ASSEMBLY KIT | | | | |
| 958022 | K-Y917 | Includes: Pilot Valve Assembly, Enclosing Tube Locknut, Enclosing Tube, Stem and Plunger Assembly, Enclosing Tube Gasket, Inlet Strainer Screen and Tetraseal, (4) Cap Screws | 1 | | | |
| | | INTERNAL PARTS KIT | | | | |
| 958021 | KS-SHGB-15 | Includes: Piston, Body Sleeve, O-Ring, Spring and Gasket | 1 | | | |
| | ENCLOSING TUBE KIT | | | | | |
| 382355 | KE-9 | Includes: Enclosing Tube Assembly, Enclosing Tube Gasket, Coil Screw | 1 | | | |

* Refer to the table below regarding part numbers for the enclosing tube gasket (tetraseal) and the new wolverine gasket.

| ltem Number | New Style Wolverine Gasket | ltem Number | Old Style Tetraseal Gasket |
|----------------|----------------------------------|----------------|----------------------------------|
| 380104 | 14000-2 | 183660 | 641-3 |

The SHGB(E)-15, OLDR-15, LDR-15, XTM, XTO, LDR-20, OLDR-20 and DDR-20 valves have been redesigned. The design change includes a new enclosing tube gasket that can easily be identified as a thin, synthetic coated metal gasket. The old gasket is a thicker type of O-ring with a square cross section, known as a tetraseal. See the partial cross sections of the valve body above.

The gaskets and the enclosing tubes of the two designs are not interchangeable. The new enclosing tube assembly with both a wolverine gasket and a tetraseal are included in the replacement parts kit for the valves listed above.


- ① Replacement part not available.
- 2 Part is **not** available separately, but **is** included with the Internal Parts Kit.
 3 Part **is** available separately.
- ④ Part is available separately and is also included with the Enclosing Tube Kit.
- (5) Part is available separately and is also included with the Internal Parts Kit.
- ⁶ Part **is** available separately and **is** also included with the Pilot Assembly
- Kit and the Internal Parts Kit.
 Part is **not** available separately but **is** included with the Pilot Assembly Kit and the Enclosing Tube Kit.
- (8) Part is not available separately but is included with the Pilot Assembly Kit.

Pressure Regulating Valves


| | | (O)LDR REPLA | CEMENT PARTS an | d PARTS KITS | | | | |
|-----------------------------------|-------------|--|---------------------------|--------------|--------|---------|--|--|
| ITEM NUMBER | | IUMBER and DESCRIPTION IGS ON PAGES 53, 54 and 55 | LDR-16 | OLDR-16 | LDR-21 | OLDR-21 | | |
| REPLACEMENT PARTS SOLD SEPARATELY | | | | | | | | |
| _ | 21028-7 | Cap Screw | 4 | 4 | | | | |
| _ | 15819-6 | cap sciew | | | 4 | 4 | | |
| _ | MKC-1 | Coil | | 1 | | 1 | | |
| — | OMKC-1 | (Specify Voltage & Frequency) | 1 | | 1 | | | |
| 382009 | 1025-7 | Coil Housing Locknut | 1 | | 1 | | | |
| 958101 | 1390-000 | Coil Housing Screw | | 1 | | 1 | | |
| 380103 | 14000-1 | Enclosing Tube Gasket (Tetraseal)* | 1 | 1 | 1 | 1 | | |
| 382155 | 13256-2 | Enclosing Tube Locknut | 1 | 1 | 1 | 1 | | |
| 183608 | 621-11 | O-Ring (small) | 2 | 2 | | | | |
| 968030 | 621-036 | O-Ring (large) | 1 | 1 | | | | |
| 183613 | 623-110 | O-Ring (small) | | | 2 | 2 | | |
| 183614 | 623-150 | O-Ring (large) | | | 1 | 1 | | |
| 382580 | 2003-1 | Seal Cap | 1 | 1 | 1 | 1 | | |
| 382623 | 638-106 | Seal Cap O-Ring | 1 | 1 | 1 | 1 | | |
| 382034 | 15582-6 | 0 | 1 | | | | | |
| 382037 | 15582-7 | — Spacer Cup | | | 1 | | | |
| 382008 | 14115 | Valve Nameplate (Specify Valve Type, Voltage & Frequency) | 1 | 1 | 1 | 1 | | |
| | | RE | PLACEMENT PARTS KIT | S | | | | |
| | | PILOT I | DIFFERENTIAL ASSEMB | LY KIT | | | | |
| | | | INTERNAL PARTS KIT | | | | | |
| 381653 | KS-OLDR-16 | Upper Valve Assembly Piston Assembly Enclosing Tube Locknut Closing Spring, O-Ring (large) O-Ring (small), Cap Screws | | 1 | | | | |
| 382652 | KS-OLDR -21 | Upper Valve Assembly Piston Assembly Enclosing Tube Locknut Closing Spring, O-Ring (large) O-Ring (small), Cap Screws | | | | 1 | | |
| | | | ENCLOSING TUBE KIT | | | | | |
| 382435 | KE-6 | | | 1 | | 1 | | |

* Refer to the table on Page 51 regarding part numbers for the enclosing tube gasket (tetraseal) and the new wolverine gasket.


Pressure Regulating Valves **(O)LDR-16**

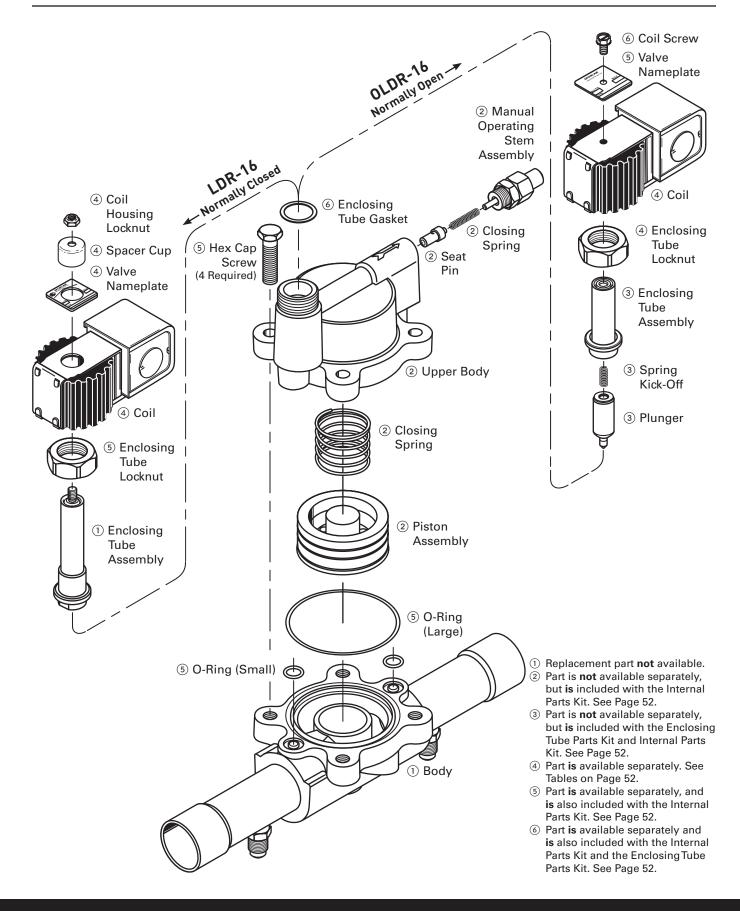

Pressure Regulating Valves (0)LDR-21

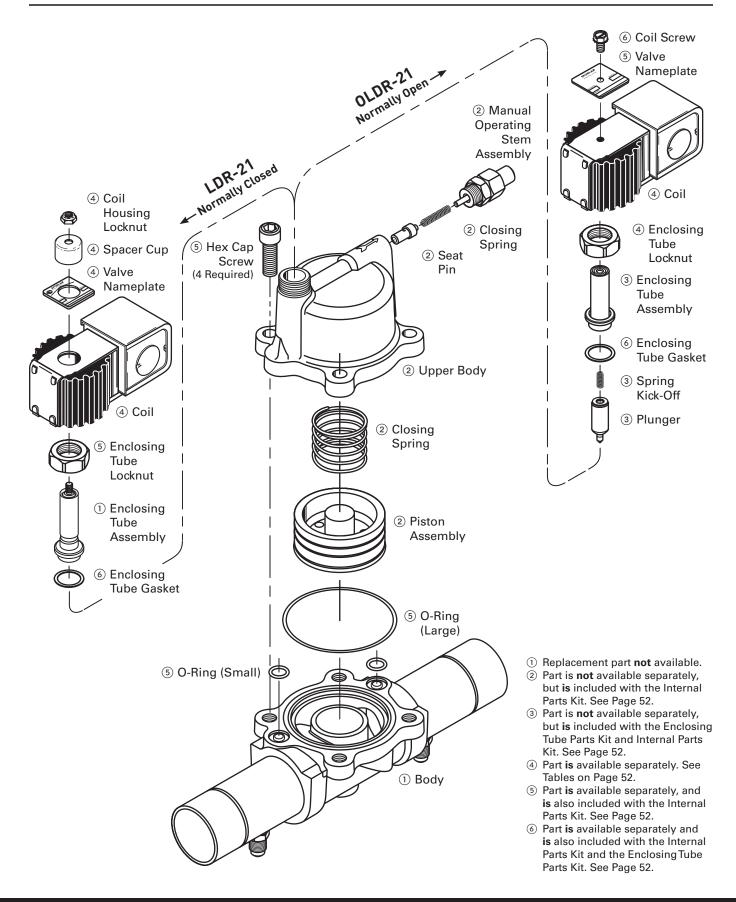

Pressure Regulating Valves **DDR-20**

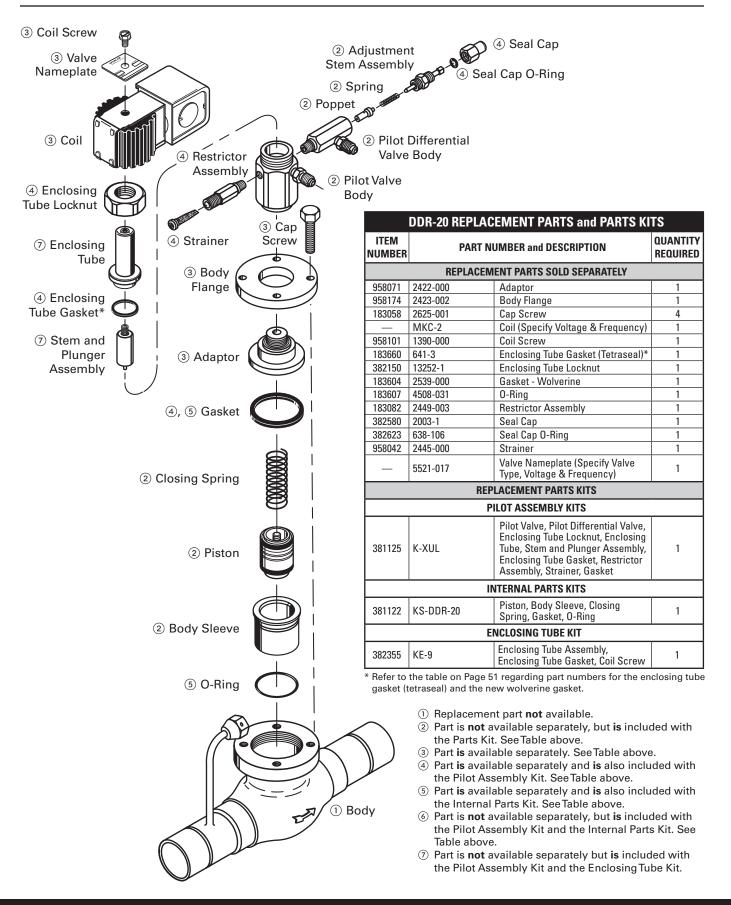

Pressure Regulating Valves **Replacement Parts**

| | CRANKCASE PRVs - EVAPORATOR PRVs - HEAD PRESSURE REGULATING VALVES | | | | | | | |
|--------|--|-----------------------------|----------|------------|-----------|----------|-----------|--------|
| ITEM | | ABER and DESCRIPTION | | VALVE TYPE | | | | |
| NUMBER | FANT NUM | MBER allu DESCRIFTION | CRO(E)-4 | CRO(T)-6 | CRO(T)-10 | ORI(T)-6 | ORI(T)-10 | OROA-5 |
| 908039 | 838-000 ③ | Valve Cap | | 1 | | 1 | | |
| 908041 | 895-000 ③ | valve cap | | | 1 | | 1 | |
| 183690 | 621-016 | O-Ring, Valve Cap | | 1 | | 1 | | |
| 183601 | 621-023 | U-hilly, valve cap | | | 1 | | 1 | |
| 908017 | KO-6-100/290 | Spring Kit ① | | | | 1 | | |
| 908019 | KO-10-100/290 | Spring Kit ② | | | | | 1 | |
| 908008 | A4-S-0/20 | Adjustable Element | 1 | | | | | |
| 908010 | A4-S-0/50 | | 1 | | | | | |
| 908074 | 825-003 | Inlet Strainer (3/8" ODF) | 1 | | | | | |
| 908002 | 825-004 | Inlet Strainer (1/2" ODF) | 1 | | | | | |
| 908001 | 825-005 | Inlet Strainer (5/8" ODF) | | | | | | 1 |
| 908003 | 825-007 | Inlet Strainer (7/8" ODF) | | 1 | | 1 | | 1 |
| 908005 | 825-009 | Inlet Strainer (1-1/8" ODF) | | | 1 | | 1 | |
| 908007 | 825-011 | Inlet Strainer (1-3/8" ODF) | | | | | | |

| | CONSTANT PRESSURE (AUTOMATIC) EXPANSION VALVES | | | | | | |
|--------|--|---------------------|---|---|------------|-----|---------------------|
| ITEM | TEM | | | | VALVE TYPE | | |
| NUMBER | PART NUM | BER and DESCRIPTION | C | S | Р | PDA | AJ(E) or ADRI(E) |
| 908026 | A-2-0/80 | | | | | 1 | |
| 908028 | A-3-0/30 | | | | 1 | | |
| 908030 | A-3-0/80 | | | | | | |
| 908020 | A4-0/55 | Adjustable Element | | | | | 1 |
| 908022 | A4-0/75 | Adjustable Element | | | | | |
| 908073 | A4-75/150 | | | | | | |
| 908027 | A-8-0/30 |] | 1 | 1 | | | |
| 908029 | A-8-0/80 | | | | | | |

Internal Parts Kits for Constant Pressure Expansion Valves are identical to the corresponding G, C, S, or PTEV Internal Parts Kits (refer to Page 20), however, the pushrod height requirements are different. The PDA-1-0/80 requires a pushrod height 0.008" greater than a DA(E)-1, the C and S Constant Pressure Expansion Valves require a pushrod height 0.018" greater than a C or SThermostatic Expansion Valve and the P Constant Pressure Expansion Valve requires a pushrod height 0.010" greater than a P Thermostatic Expansion Valve. Internal Parts Kits are not available for AJ(E), NJ(E), or (A)DRI(E) valves.


① Can be used with ORI-6-65/225 to change adjustment range to 80/325.

② Can be used with ORI-10-65/225 to change adjustment range to 100/290.

 $\bar{(3)}\,$ Specify value type and adjustment range.

| HEAD PRESSURE CONTROL VALVES | | | | | |
|------------------------------|-----------------------------|------------------------------------|-------|------------|--------|
| ITEM | PART NUMBER and DESCRIPTION | | | VALVE TYPE | |
| NUMBER | ſ | ANT NUMBER allu DESCRIFTION | LAC-4 | LAC-5 | LAC-10 |
| 908074 | 825-003 | Inlet Strainer (3/8" ODF) | 0 | | |
| 908002 | 825-004 | Inlet Strainer (1/2" ODF) | 2 | | |
| 908084 | R-3L-210 | Non-adjustable Remote Bulb Element | | | |
| 908066 | D-3L 100 | Non-adjustable Dome Element | | | |
| 908086 | D-3L 120 | Non-adjustable Dome Element | | 1 | 1 |
| 908063 | D-3L 180 | Non-adjustable Dome Element | | | |
| 908081 | D-3L 210 | Non-adjustable Dome Element | | | |


Electronic Temperature Control Systems - Electric Valves **CDS Series**

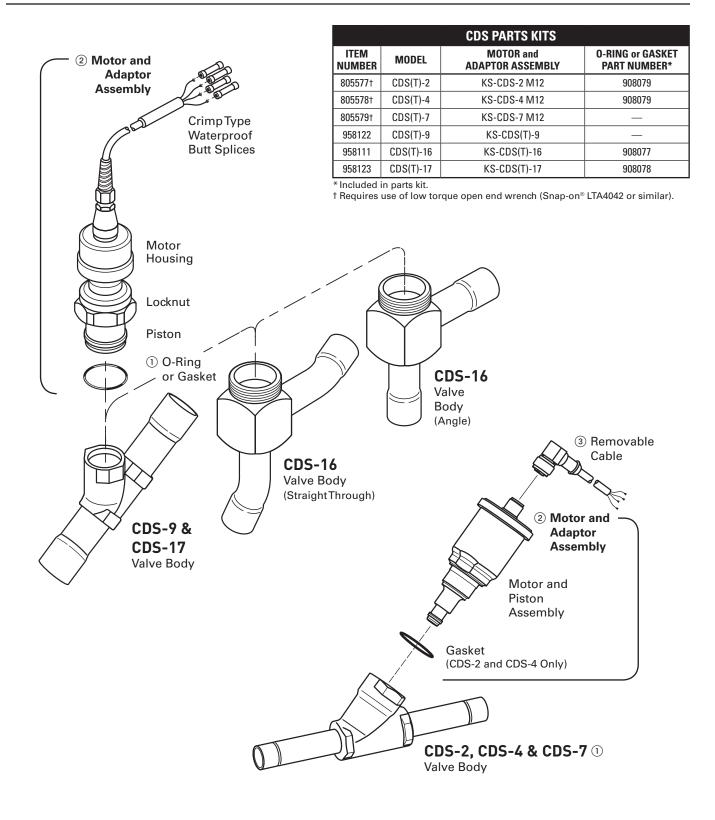

① CDS-7 and CDS-9 do not require an O-Ring or Gasket.

- 2 All joints are sealed and no attempt should be made to disassemble.
- ③ Replacement motor kit will have M12 connector for CDS-2, 4, and 7. Replacement of existing cable may be necessary. Cable styles are shown on page 66 for reference.

Electronic Temperature Control Systems - Electric Valves SORIT / A8 / A9 to CDS Series

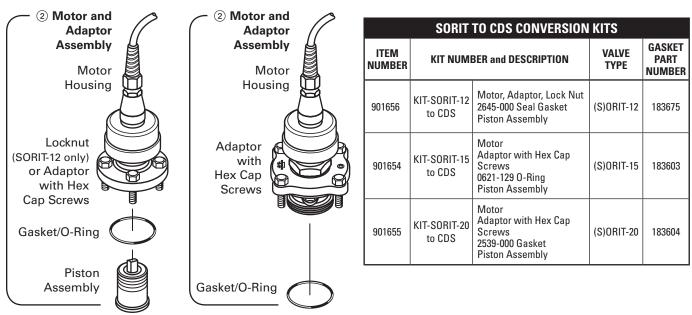


SORIT to CDS Conversion Kit

A8/A9 to CDS[†] Conversion Kit

| | CON | VERSION KIT CROSS REFER | ENCE† | |
|-----------------------|-----------|-------------------------|-------------|--|
| VALVE TYPE | PORT SIZE | CONVERSION KIT | ITEM NUMBER | GASKET PART NUMBER |
| A81 | 5/8" | | | |
| A8A | 3/8″ | | | |
| AOA | 5/8″ | A81 to SDR-5 | 183903 | |
| (S)PORT or (S)PORT-II | 3/8″ | | | |
| | 5/8″ | | | |
| | 7/8″ | | 183904 | 202701 Parker Refrigerating Specialties |
| A81 | 1-1/8″ | - | | |
| | 1-3/8″ | | | |
| A8A | 7/8″ | A81 to CDS-17 | | |
| | 7/8″ | | | |
| (S)PORT or (S)PORT-II | 1-1/8″ | | | |
| | 1-3/8″ | | | |
| A82* | 1-5/8″ | | 183905 | |
| A02 | 2-1/8″ | A82 to CDS-17 | | |
| (S)PORT* | 1-5/8″ | A02 10 00 3-17 | 103303 | |
| | 2-1/8″ | | | |
| | 3/8″ | | | |
| A9 | 5/8″ | A9 to CDS | 805580 | |
| AJ | 7/8″ | A3 10 003 | 003300 | |
| | 1-1/8″ | | | |

*2-5/8" port not supported.


Electronic Temperature Control Systems - Electric Valves **SDR Series**

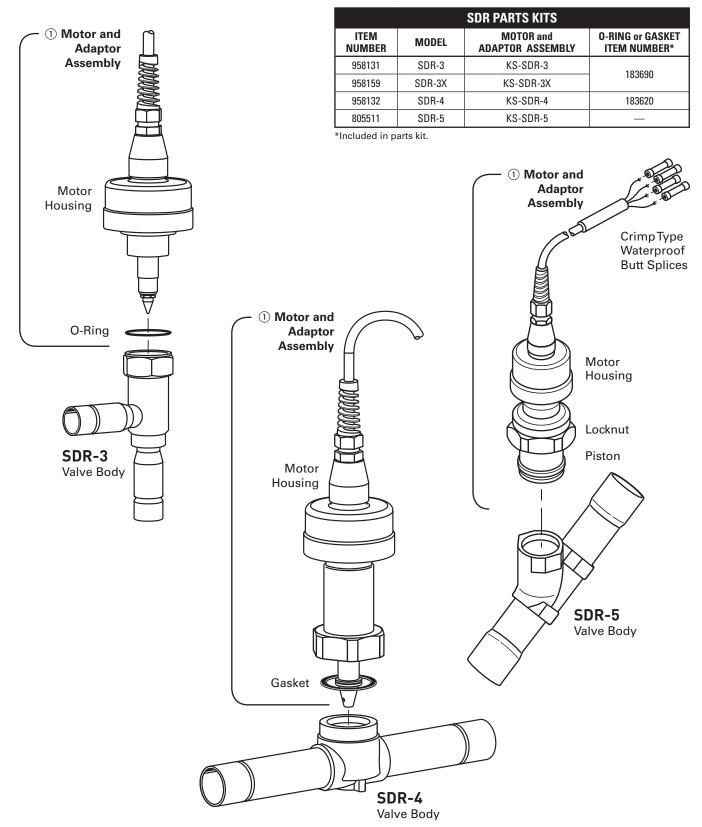

No motor kit available for SDR-1X, 2, and 2X.

1) All joints are sealed and no attempt should be made to disassemble.

Electronic Temperature Control Systems - Electric Valves **SEI, SEH and SEHI Series**

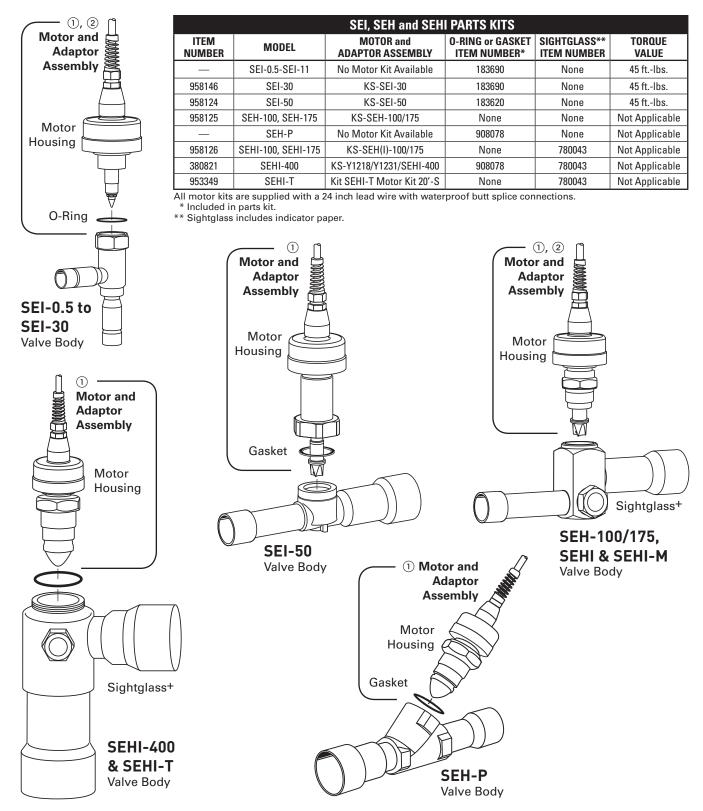

SEI valves are considered obsolete, see EEV Cross Reference on page 62 for recommend valve replacement. Number of steps and chopping current set points may have to be modified for replacement valve.

① All joints are sealed and no attempt should be made to disassemble.

2 Motor kit not available for SEI-0.5 - SEI-11 but may be serviced without removing the body.

+ Knife edge joint, no gasket required.

Electronic Temperature Control Systems - Electric Valves SER, SERI and SSER Series

SER valves ending in a number are considered obsolete, see EEV Cross Reference on page 62 for recommend valve replacement. Number of steps and chopping current set points may have to be modified for replacement valve.

(1) SSER-AA, A, B, and C are similar to corresponding SER models but have **Removable Strainer P/N: 183002**. Motor assemblies are not serviceable.

(2) Replacement motor kit will have M12 connector. Cable replacement may be necessary. See page 66.

+ Knife edge joint, no gasket required.

Electronic Temperature Control Systems - Electric Valves **EEV Cross Reference**


| EEV CROSS REFERENCE | | | | | | | | | |
|---------------------|-----------------------------|---------|---------------------|----------|--|--|--|-----------|--|
| | ORIGINAL VALVE | | | ED VALVE | | | | | |
| Steps | Мо | del | Model | Steps | | | | | |
| | SEI5 | | SER-AA | | | | | | |
| | SEI-1.5 | SER-1.5 | SER-A SER-B | | | | | | |
| 1,596 | SEI-2.5 SEI-3.5 SEI-6 | SER-6 | SER-C | | | | | | |
| | SEI-8.5 SEI-11 | SER-11 | SER-D | 2,500 | | | | | |
| 3,193 | SEI-30 | SER-20* | SERI-F SERI-G(S) | | | | | | |
| | | | | | | | | SERI-J(S) | |
| 6 206 | SEI-50 | — | SERI-K(S) | | | | | | |
| 6,386 | SEH(I)-100 | — | SERI-L(S) | | | | | | |
| | | | SEH(I)-175 | | | | | | |
| | | | SEH-P | 6 206 | | | | | |
| | | | SEHI-400 | 6,386 | | | | | |
| | | | SEHI-T | | | | | | |

*SER-20 has 1,596 steps.

Electronic Temperature Control Systems - Electric Valves **MTW Series**

| ITEM NUMBER | ITEM DESCRIPTION | Assembly |
|----------------|--|-------------------------|
| 183936 | KT-MTW-7S - Kit contains replacement motor assembly and gasket. | |
| 183924 | KT-MTW-9S Assembly - Kit contains new motor, top piston, bottom piston, screw, and bottom cap. | Motor |
| 183925 | KT-MTW-17S Assembly - Kit contains new motor, top piston, bottom piston, screw, and bottom cap. | Housing |
| 183926 | KT-MTW-21S Assembly - Kit contains new motor, top piston, bottom piston, screw, and bottom cap. | Top Piston |
| | t parts are not offered separately. bly will have a 20' cable with stripped and | |
| | | Gasket (MTW-17 Only) |
| | | |
| | MTW-9, - Valve Bc | |
| | | |
| | Bottom Pis Sc | ston rew |
| | Sc | sket |

Electronic Temperature Control Systems - Electric Valves **GC and FGB Series**

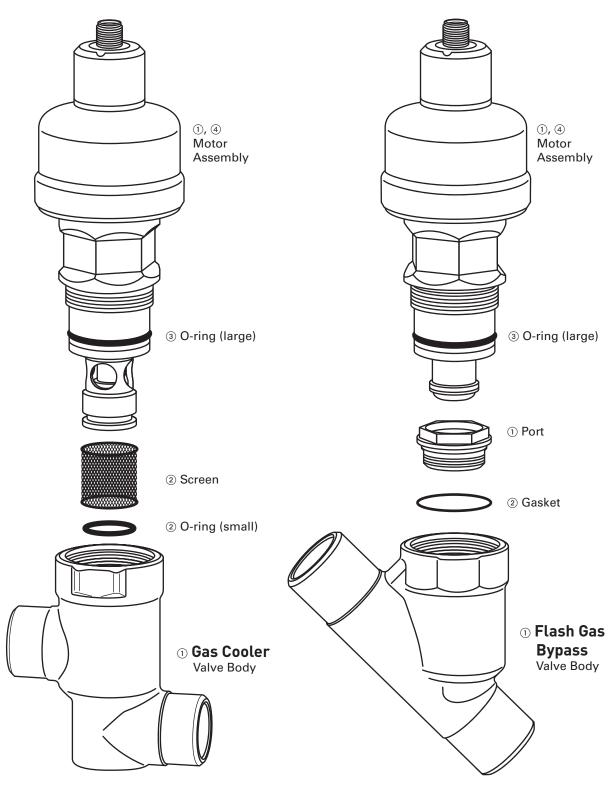


① Replacement part **not** available.

- ⁽²⁾ Part is not available separately, but is included with the GC/FGB Service Kit P/N: 953378.
- ③ Part is available separately (621-125 O-Ring, Large O-Ring P/N: 968019), and is also included with the GC/FGB Service Kit P/N: 953378.
- ④ Motor assembly requires a M12 connector.

GC/FGB Service Kit P/N: 953378 includes screen, FGB gasket, 2 large o-rings, and 1 small o-ring. One kit will do both valves.

Electronic Temperature Control Systems - Electric Valves **SPW Series**

| | SERVICE PARTS | | | | | |
|----------------|--------------------------------|---|--|--|--|--|
| ITEM NUMBER | ITEM DESCRIPTION | NOTES | | | | |
| 953423 | SERVICE KIT - SPW VALVE | O-ring and screen (1 each) | | | | |
| 953424 | PORT KIT - SPW VALVE | SPW ports sizes 0 through 7, o-ring, and screen (1 each) | | | | |
| 020404-52 | KIT - SPW RTNR & WASHR (25PCS) | Coil retaining rings and coil spring washers (25 each) | | | | |
| 21223-000-KIT | KIT - SPW-0 PORT 5PCS | SPW-0 ports and o-rings (5 each) | | | | |
| 21223-001-KIT | KIT - SPW-1 PORT 5PCS | SPW-1 ports and o-rings (5 each) | | | | |
| 21223-002-KIT | KIT - SPW-2 PORT 5PCS | SPW-2 ports and o-rings (5 each) | | | | |
| 21223-003-KIT | KIT - SPW-3 PORT 5PCS | SPW-3 ports and o-rings (5 each) | | | | |
| 21223-004-KIT | KIT - SPW-4 PORT 5PCS | SPW-4 ports and o-rings (5 each) | | | | |
| 21223-005-KIT | KIT - SPW-5 PORT 5PCS | SPW-5 ports and o-rings (5 each) | | | | |
| 21223-006-KIT | KIT - SPW-6 PORT 5PCS | SPW-6 ports and o-rings (5 each) | | | | |
| 21223-007-KIT | KIT - SPW-7 PORT 5PCS | SPW-7 ports and o-rings (5 each) | | | | |

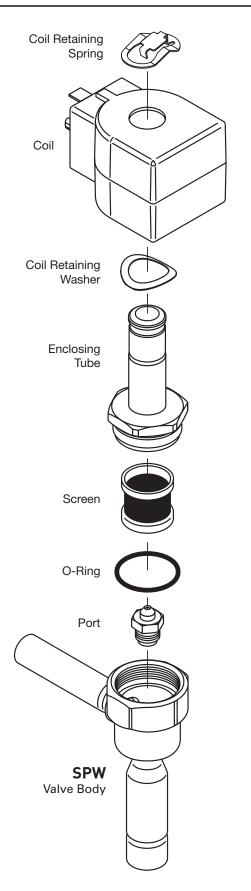


Electronic Temperature Control Systems - Electric Valves Electric Valve Cable Kits


| CABLE KIT REPLACEMENT PARTS | | | |
|--|------------------------|--|--|
| MODEL | CABLE KIT | | |
| CDS-2, -4, -7 † SER Number Valves SER-F, -G, -J, -K, -L † SDR-1X, 2, 2X | Cable Assembly SER 10' | | |
| | Cable Assembly SER 20' | | |
| | Cable Assembly SER 30' | | |
| | Cable Assembly SER 40' | | |
| | KIT - SER Cable Clips | | |

| M12 CABLE KITS | | | |
|----------------|--------------------------------|--|--|
| ITEM NUMBER | PART NUMBER and DESCRIPTION | | |
| 805194 | KIT - CABLE - M12-10'-S-4 WIRE | 10' Cable with stripped and tinned ends | |
| 805195 | KIT - CABLE - M12-20'-S-4 WIRE | 20' Cable with stripped and tinned ends | |
| 805343 | KIT - CABLE - M12-30'-S-4 WIRE | 30' Cable with stripped and tinned ends | |
| 805344 | KIT - CABLE - M12-40'-S-4 WIRE | 40' Cable with stripped and tinned ends | |

* Clamshell style cables are no longer available.

[†] Valve with clamshell style cable is obsolete as of December 2017. Confirm valve cable type before ordering.

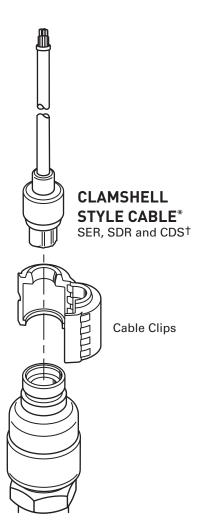



M12 cables can be installed in any orientation.


Electronic Temperature Control Systems - Control Boards **IB and ESX Series**

| INTERFACE BOARDS | | | |
|----------------------------|--------------------------|----------------|--|
| DESCRIPTION - OLD VERSION | REPLACEMENT | ITEM NUMBER | |
| IB1, IB2, IB3, IB6, IB ESX | IB-G | 953580 | |
| IB1, IB2, IB3, IB6, IB ESX | IB-G w/Conformal Coating | 953680 | |



TCB Series

| TCB TEMPERATURE CONTROL AND ACCESSORIES | | | |
|---|---|--|--|
| ITEM NUMBER | DESCRIPTION | | |
| 952664 | TCB with Potentiometer | | |
| 952660 | TCB less Potentiometer | | |
| 952669 | Air Sensor (-40°F – 210°F) | | |
| 952662 | 2K Surface Sensor with Tie Wrap (-40°F – 210°F) | | |
| 952792 | High Amp TCB to control 2 valves | | |
| 952793 | High Amp TCB with Potentiometer | | |
| 952714 | TCB quik response (EEV Interface)* | | |
| 953276 | SMA-12 Diagnostic Tool | | |



* When TCB quick response is used to control an Electric Expansion Valve (EEV), the external controller must sense and control superheat. Failure to do so may lead to floodback and system damage.

Electronic Temperature Control Systems - Controller Packages **CO₂ Series**

| PSK3L CO ₂ CONTROLLER | | |
|----------------------------------|-----------------------|--|
| ITEM ITEM DESCRIPTION | | |
| PSD4BX3XXXVP | PSD4B Interface Board | |

Electronic Temperature Control Systems - Controller Packages **Kelvin II Series**

| KELVIN II SERIES CONTROLS | | | | |
|---------------------------|--|--|--|--|
| ITEM NUMBER | | | | |
| 953463 | Chiller Control | | | |
| 952570 | Kelvin II Subcool Control | | | |
| 952567 | Kelvin II Superheat Control with Display | | | |
| 952569 | Kelvin II Superheat Control w/o Display | | | |
| 953462 | Kelvin II Temperature Control | | | |
| 952568 | Kelvin IId Remote Display Unit | | | |
| 953474 | Pressure Control | | | |
| 953553 | Secondary Fluid w/o Display | | | |

PSK Series

| PSK REFRIGERATION CONTROLS | | | |
|----------------------------|--------------------------------|--|--|
| ITEM NUMBER | MODELS | | |
| PSK201N5 | PSK201N5 115 VAC MT 1/2HP | | |
| PSK201N7 | PSK201N7 230 VAC MT 1.5HP | | |
| PSK203N5 | PSK203N5 115 VAC LT 1/2HP | | |
| PSK203N7 | PSK203N7 230 VAC LT 1.5HP | | |
| PSK204N9 | PSK204N9 115-230 VAC LT | | |
| PSK214N9EXBS | PSK214N9EXBS 115-230 V 4 RELAY | | |
| PSK221N5EXBS | PSK221N5EXBS 115 VAC MT 1/2HP | | |
| PSK221N7EXBS | PSK221N7EXBS 230 VAC MT 1.5HP | | |
| PSK223N5EXBS | PSK223N5EXBS 120 VAC LT 1/3HP | | |
| PSK223N7EXBS | PSK223N7EXBS 230 VAC LT 1/2HP | | |
| PSK231N5EXBS | PSK231N5EXBS 115 VAC MT 1HP | | |
| PSK231N7EXBS | PSK231N7EXBS 230 VAC MT 2HP | | |
| PSK233N5EXBS | PSK233N5EXBS 115 VAC LT 1HP | | |
| PSK233N7EXBS | PSK223N7EXBS 230 VAC LT 1/2HP | | |

S3C Series

| S3C SERIES CONTROLS | | | |
|---------------------|-------------------------------------|--|--|
| ITEM NUMBER | ITEM DESCRIPTION | | |
| 953621 | Case Control | | |
| 953623E | Valve Module | | |
| 961626S | Display Module | | |
| S3C SERIES SENSORS | | | |
| 953503 | Temperature and Humidity Sensor | | |
| 953507 | Current Transformer 25 amp to 5 VDC | | |

See accessories on page 69.

*S3C Controls use 10k temperature probes.



Superheat

.............

| PSK ACCESSORIES | | | |
|-----------------|---------------------------------|--|--|
| ITEM NUMBER | MODELS | | |
| 952899 | NTC Temperature Probe 5' cable | | |
| 952898 | NTC Temperature Probe 10' cable | | |
| PSKey | PSK Programming Key | | |
| PSPS01 | PSKey Power Supply | | |
| PSIF20TSX | TTL to RS485 Adaptor | | |



Electronic Temperature Control Systems - Controller Packages **Control Accessories**

| VALVE CONTROL ACCESSORIES | | | | |
|---------------------------|------------------------------------|--|------------------|---|
| ITEM NUMBER | ITEM DESCRIPTION | | NOTES | |
| arker-Sporla | n Tempera | ture Probes | | |
| 952669 | | Air Sensor | | 10′ (3.0 m) |
| 952795 | 2k | Well Sensor | | Single Shielded Black Cable - 12' (3.7 m) |
| 952662 | | Surface Sensor | () | Single Shielded Black Cable - 12' (3.7 m) |
| 230545 | | Surface | I'M H | 20′ (6.1 m) |
| 230546 | – 3k | Air | | 20′ (6.1 m) |
| 230072 | | | | Orange Cable - 20' (6.1 m) |
| 230076 | | Surface (Recommended) | | Blue Cable -20' (6.1 m) |
| 230078 | | (| | Red Cable - 20' (6.1 m) |
| 230073 | 10k | Air | | Green Cable - 20' (6.1 m) |
| 230075 | | (Recommended) | 0 | Yellow Cable - 20' (6.1 m) |
| 952899 | | NTC Temperature Probes for PSK PSTPN615F200 | | 5′ (1.5 m) |
| 952898 | | PSTPN630F200 | | 10' (3.0 m) |
| 952565 | 98.6k | Surface (High Temperature) | | 15′ (4.6 m) |
| - | | Transducers | | |
| 992579 | PSPT0652SVSP-SD | | | 0-625 psis transducer (R744) |
| 992576 | - | 00SVSP-SD | | 0-500 psig / 0-34.5 bar transducer (R-744 subcritic |
| 992574 992572 | PSPT0300SVSP-SD | | And a first data | 0-300 psig / 0-20.7 bar transducer (R-410A) 0-150 psig / 0-10.3 bar transducer (all other refrigerar |
| 993291 | PSPT0150SVSP-SD PSPT0150AVSP-SD | | | 0-150 psig / 0-10.3 bar transducer (an outer reingeral |
| | | | | |
| 953192 | | Pressure Transducer Cables PSPT 000000 CP20 | | 6.5' (2 meter) cable |
| 953100 | | 00000 CP50 | | 16' (5 meter) cable |

Electronic Temperature Control Systems - Controller Packages **Control Accessories**

| VALVE CONTROL ACCESSORIES | | | | |
|---------------------------|--|-------------------------|--|--|
| ITEM NUMBER | ITEM DESCRIPTION | ITEM NUMBER | ITEM DESCRIPTION | |
| Troubleshootin 953276 | g Accessories SMA-12 Handheld digital instrument for testing electric valve performance. | 958112 | 4 PIN Packard (18 AWG x 18") Cable | |
| 953193 | CDS/CPC 2.5mm Pigtail (18.5") Cable | 958113 | 5 PIN Packard (20 AWG x 24") Cable | |
| 953158 | SMA-12 w/CPC 2.5mm Conn Assembly | 953277 | SMA-12 ASSY w/Packard Pigtail* (20 AWG x 24") Assembly | |
| 952919 | CDS/CPC Pigtail (18.5") Cable | 805620 | M-12 Connector | |
| 953229 | SMA-12 Assy w/CPC Pigtail Assembly | Miscellaneous 953444 | Power Supply Input: 100-240 VAC Output: 24VDC, 60W | |

*Both 4 and 5 PIN Packard Pigtails are included in this assembly.

Moisture and Liquid Indicators See-All[®] Series



Replacement is through the bottom



Replacement Indicator Paper--Sporlan Kit K-SA-4 consisting of a new slotted cylinder and indicator paper assembly is available for replacing the indicator in the fused glass style Sporlan See-Alls (1/4" thru 1-1/8" sizes) manufactured since 1984. Replacement is through the bottom. Use a 6 point 1/2" boxed end wrench or 6 point socket to remove and reinstall the indicator post plug. If the indicator becomes damaged, it is generally recommended that the entire See-All be replaced. However, the parts kit can be used in situations where it is difficult to remove the See-All.

Types SA-211, 213 and 217 features a **removable cartridge** containing the moisture indicating element. The cartridge has a knife edge joint and is available as a separate unit for field replacement purposes if necessary. It is designated as AC-20 and fits all three sizes.

| | SEE-ALL REPLACEMENT PARTS | | | | | | | |
|----------------|---------------------------|--|--|--|--|--|--|--|
| ITEM NUMBER | I | PART NUMBER and DESCRIPTION | | | | | | |
| 780002 | K-SA-4 | Indicator Assembly | | | | | | |
| 780005 | AC-20 | Replaceable Cartridge | | | | | | |
| 780009 | JP-1099-000 | Dust Cover for SA-12, SA-13 | | | | | | |
| 780011 | JP-1023-000 | Dust Cover for SA-14, SA-15, SA-17, SA-19 | | | | | | |
| 481201 | JP-1121-000 | Dust Cover for SA-211, SA-213, SA-217, AC-20 | | | | | | |


Oil Level Control Systems **Oil Filters**

| OIL FILTER REPLACEMENT PARTS | | | | | | |
|--|------------|------------------------------------|-------------------------|--|--|--|
| ITEM NUMBER | | PART NUMBER and DESCRIPTION | USED ON | | | |
| 481300 | JP-711-000 | Bolt 5/16" x 1-1/2" (6 required)** | | | | |
| _ | _ | Endplate** | | | | |
| 481103 | 1288-005 | Gasket, Endplate (Comes with OFE) | DOE 410 T | | | |
| 481322 | JP-710-000 | Nut 5/16" (6 Required) | ROF-413-T Oil Filter | | | |
| 183174 Access Valve Kit (1/4" SAE x 1/4" NPT) Valve Core (P/N: 480088) can be purchased separately. | | | | | | |
| 960015 | OFE-1 | Oil Filter Element with Gasket | | | | |

* Grade 5 bolts used on ROF.

** Replacement endplate no longer available.

Oil Level Control Systems Adaptor Kits

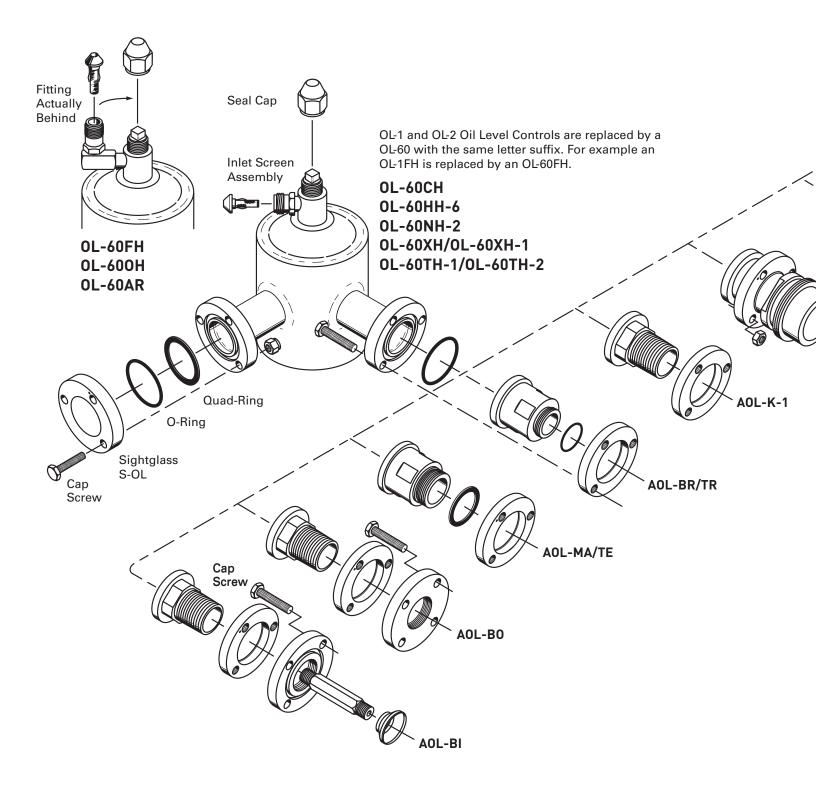

Oil Level Control Systems Adaptor Kits

| | Cap S | Screw | | | L RESER | /OIR REPLA | CEMENT | PARTS |
|--|---|--|---|--|----------------------------------|---------------------------------------|------------------------------|------------------------------------|
| | | | | ITEM NUMBER | F | ART NUMBER | and DESCR | IPTION |
| | Drill mar | k (OF) | | ** | 14000-8 | | eservoir Sig eservoir Obs | |
| / | indicates | | | ** | AC-20-K27 | Sightglass | for OR-1½ (|)il Reservoir |
| / | top hole. | | ng from | ** | _ | POR Sight | glass | |
| < | Δ | Com | pressor | 053683-00 | _ | 0-Ring for | POR Sightg | ass |
| < | (Λ_{a}) | | R-1 | 059577-00 | _ | | servoir Kit* | |
| | 1 ((() () () () () () () () (| > | | | | for Adaptor K valves, 2 brac | | |
| Ą | | O-Ring from | | ** No longe | | | kets, z nuts | |
| `````````````````````````````````````` | E C | Compressor | ADAPTOR KITS | | | | | |
| | 80 | AOL-C | COMPRESSOR MANUFACTURER | COMPRESSO MODEL NUM | זג או | MPRESSOR Tachment Pattern | ITEM NUMBER | SPORLAN Adaptor Kit Number** |
| 0 | 1000 | | | 2KC, 2JC, 2HC, 2 2FC, 2EC, 2DC, 2 4FC, 4EC, 4DC,4 | 2CC, 1-1/ | 3″ Thread | 968026 | AOL-MA/TE ② |
| | | OL-A | Bitzer | 4VC, 4TC, 4PC, 4 | | lt, 1-7/8" B.C. Smm B.C.) | _ | NONE ① |
| | | | | 4J, 4H, 4G, 6J, 6 6G, 6F | ^{iH,} 4 Bo | lt, 50mm B.C. | _ | NONE ① |
| | | | | 8GC, 8FC | - | lt, 1-7/8" B.C. Smm B.C.) | 968023 | A0L-R-1 ① |
| | | | Bock | HA3-5, HG3-5, AM/F2-5, HA8, I | 166 | lt, 50mm B.C. | | |
| | | | | F | (47.6 | lt, 1-7/8" B.C. Smm B.C.) | 968023 | AOL-R-1 ① |
| 011 | | | Bristol | | | 6" - 20 Thread | <u> </u> | |
| ITEM | | ROL REPLACEMENT PARTS | Carrier | 06EA, 06ER | (47.6 | lt, 1-7/8" B.C. Smm B.C.) | 968023 | A0L-R-1 ① |
| NUMBER | | | | 06DA, 06DR, 5F, | | 2" - 18 Thread | 968009 | AOL-C 2 |
| 968019 | 621-125 | O-Ring 1-5/16 ID | | Over 5 Ton | | lt, 1-7/8" B.C. Smm B.C.) | 968023 | AOL-R-1 ① |
| 183888 968003 | 1053-000 JP-1222-000 | Seal Cap Quad Ring 1-5/16 ID | Copeland | Under 5 HP | | 3" - 12 Thread | 968007 | AOL-A 2 |
| 183190 | JP-1222-000 | Sightglass Cap Screw 1/4 - 20 x 3/4 | | 8R, 3D Front, 2D | , 4D, 3 Bo | lt, 1-7/8″ | 968023 | A0L-R-1 ① |
| 183192 | JP-1218-001 | Cap Screw 1/4 - 20 x 1 | | 6D, 8D | | imm) B.C. | 300020 | |
| 183194 | | Cap Screw 1/4 - 20 x 1-1/4 Fits AOL-P, AOL-A, AOL-C and | Dorin | 4 cyl-15 HP | (47.6 | lt, 1-7/8" 5mm) B.C. It, 1-7/8" | | |
| | | AOL-R-1 Adaptors | Dunham-Bush | Big 4 | | 6mm) B.C. | 968023 | A0L-R-1 ① |
| 183118 | 3952-000 | Cap Screw 1/4 - 20 x 2 Fits AOL-BI, AOL-BO, AOL-MA/TE, AOL-BR/TR and AOL-K-1 Adaptors | Frascold | All models | | lt, 1-7/8" imm) B.C. | 500025 | |
| 968006 | JP-1215-000 | Inlet Screen Assembly | Maneurop | MT, LT, | 1-1/ | 3" - 18 Thread | 968026 | AOL-MA/TE 2 |
| 300000 | 01-1210-000 | (1) JP-0726-000 Sightglass | Prestcold | E, C | | 1M Thread | | AOL-P 2 |
| 968013 | S-OL Kit | (1) JP-1222-000 Quad Ring (1) 621-125 O-Ring | Tecumseh | P, R, S, PA, RA, 3 CK, CM, CH, CG | 1-1/ | 3″ 12 Thread | 968007 | AOL-A 2 |
| | | (3) JP-1218-001 1/4 - 20 x 1 Cap Screws | | | | 3" - 18 Thread | 968026 | AOL-MA/TE (2 |
| | | (3) JP-1223-000 1/4 - 20 Locknuts (2) JP-1222-000 Quad Ring | Trans | M, R | (47.6 | lt, 1-7/8" 6mm) B.C. | 968023 | AOL-R-1 ① |
| 968031 | K-OL-AD | (2) 621-125 O-Ring | Trane | К | 3/4" | NPT | 968024 | A0L-K-1 2 |
| | | (4) JP-1218-001 1/4 - 20 x 1 Cap Screws (4) JP-1223-000 1/4 - 20 Locknuts | | | | 6" - 20 Thread | <u> </u> | |
| | | (1) 0621-024 O-ring | York | GC, GS, JS | | lt, 1-7/8" 6mm) B.C. | 968023 | AOL-R-1 ① |
| 968029 | K-OL-Seal- Kit | (1) 0621-118 O-ring (3) 0621-125 O-ring (1) JP-1222-000 Quad Ring (1) JP-0745-000 Seal Ring (1) 4238-000 Seal Ring | ** BOLD items use ITALIC items use BOLD ITALIC item ① Use sightglass f ② Use sightglass f | e Teflon® tape as ms use the seal f from compresso | the sealing from the co r. |) method. | the sealing | method. |

Temperature Sensors and Pressure Transducers SMART Service Tools

| ITEM PART NUMBER and DESCRIPTION NUMBER | | | | | | |
|---|---|--|--|--|--|--|
| 953495 | SMART Service Tool Kit - SVD | | | | | |
| MART Servic | e Tool Kit Parts | | | | | |
| 953499 | SMART Temp Clamp | | | | | |
| 953501 | SMART Low Pressure Sensor 300 psi | | | | | |
| 953502 | SMART High Pressure Sensor 700 psi | | | | | |
| 050700 | 953700 SMART Caps | | | | | |
| 993/00 | SimAll Caps | | | | | |
| 953700 183701 | 621-024 O-ring | | | | | |
| 183701 MART Service R2450 replaced | 621-024 O-ring Tool pressure transducers and temperature clamps use a able battery. | | | | | |
| 183701 MART Service | 621-024 O-ring Tool pressure transducers and temperature clamps use a able battery. | | | | | |
| 183701 MART Service R2450 replaces MART Pro/R | 621-024 O-ring Tool pressure transducers and temperature clamps use a able battery. Parts | | | | | |
| 183701 MART Service R2450 replaces MART Pro/R 953702 | 621-024 O-ring Tool pressure transducers and temperature clamps use a able battery. Parts SMART Pro/R Temp Sensor | | | | | |



SMART Service Tools




SMART Pro/R Sensors

Strainers

| | STRAINER REPLACEMENT PARTS | | | | | | | |
|------------|----------------------------|-------------|-------------------|-------------|--|--|--|--|
| STRAINER | GAS | KET | STRAINER SCREEN** | | | | | |
| ТҮРЕ | ITEM NUMBER | PART NUMBER | ITEM NUMBER | PART NUMBER | | | | |
| XD-074* | 207790 | 609 | — | 635-3 | | | | |
| 8004* | 183855 | 4160 | 500045 | 4007.0 | | | | |
| 8006* | 103000 | 4100 | 580045 | 4097-3 | | | | |
| 9008* | 102040 | 4111 | F00040 | 4110.0 | | | | |
| 9010* | 183840 | 4111 | 580048 | 4110-3 | | | | |
| 9012* | | 4119 | | 4117-4 | | | | |
| 6022, 6023 | | | 580006 | 4385-2 | | | | |
| 6034 | N | ot | 580009 | 4395-2 | | | | |
| 6056 | Requ | uired | 580012 | 4405-1 | | | | |
| 6088 | | | 580013 | 4415-1 | | | | |

* For industrial refrigeration and R717 applications, please contact Sporlan Division -Refrigeration Business Unit at (708) 681-6300. ** All replacement screens are supplied with gasket, if applicable.

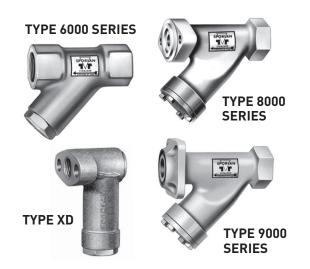

Flame-Free Refrigerant Fittings ZoomLock[®] MAX

Original ZoomLock product is obsolete and is no longer supported.

PRESS TOOLS AND JAWS

Parker Hannifin recommends the use of ROTHENBERGER press tools in combination with ZoomLock MAX ROTHENBERGER jaws. However other press tools may be used in combination with ZoomLock MAX ROTHENBERGER jaws. See table below for tool compatibility.

PRESS TOOLS

ROTHENBERGER ROMAX 4000

Includes the ROTHENBERGER ROMAX $^{\circledast}$ 32 kN press tool, 2 batteries and battery charger.

- Description: MZK-TK-R4000
- Part Number: 871441

ROTHENBERGER Twin Turbo US

Includes the ROTHENBERGER Twin Turbo US 24 kN press tool, 2 batteries and battery charger.

- Description: MZK-TK-RCTT
- Part Number: 871439





ROTHENBERGER ROMAX 4000 32 kN ROTHENBERGER Twin Turbo US 24 kN

| COMF | PATIBLE PRESS TOOLS | 32 kN | 24 kN | 19 kN |
|--------------|-------------------------------|-----------------------|-----------------------|-----------------------|
| | ROMAX [®] 3000 | ✓ | — | — |
| | ROMAX [®] 3000 AC | V | - | - |
| | ROMAX [®] 4000 | V | - | - |
| ROTHENBERGER | ROMAX [®] AC ECO | V | _ | _ |
| | Twin Turbo US (TT US) | _ | ✓ | - |
| | ROMAX [®] Compact TT | - | - | ✓ |
| | ROMAX [®] Compact | - | - | ✓ |
| DEWALT | DCE200 | ✓ | - | - |
| | UAP2/UNP2 | V | - | - |
| | UAP3L/UAP4L | V | - | - |
| KLAUKE | UP2EL14 | V | - | - |
| | MAP2L19 | _ | - | ✓ |
| | MAP219 | _ | - | V |
| MILWAUKEE | M12 Force Logic | _ | ✓ | - |
| WILVVAUKEE | M18 Force Logic | ✓ | _ | - |
| HILTI | NPR 019 | - | i – | ✓ |
| NUDCO | PC-100 | ✓ | l – | - |
| NIBCO | PC-280 | V | - | - |
| REMS | Power-Press | V | - | - |
| REIVI3 | Akku-Press | ✓ | - | - |
| | 320-E | ✓ | - | - |
| | CT400 | ✓ | - | - |
| | RP 241 | - | V | - |
| | RP 240 | - | ✓ | - |
| RIDGID | RP 210-B | _ | ✓ | — |
| KIDGID | RP 200-B | _ | ✓ | - |
| | RP 330-B | ✓ | - | - |
| | RP 330-C | V | - | - |
| | RP 340 | V | - | - |
| | RP 350 | V | | |
| VIRAX | Viper [®] P25+ | V | - | - |
| VINAA | Viper [®] P25+ | V | _ | - |

ZoomLock MAX fittings can only be connected with jaws designed for use with ZoomLock MAX products as shown on page 76.

Flame-Free Refrigerant Fittings ZoomLock[®] MAX

Original ZoomLock product is obsolete and is no longer supported.

| | JAW SE | TS / PART NUMBERS | | | |
|--|-------------------------------|----------------------------|----------------------------|--|--|
| | 32 kN | 24 kN | 19 kN | | |
| | ROTHENBERGER | ROTHENBERGER | ROTHENBERGER | | |
| | Jaw Set | Jaw Set | Jaw Set | | |
| Jaw Sets 7 Piece 1/4, 3/8, 1/2, 5/8, 3/4, 7/8, 1-1/8 | | | | | |
| | MZK-32KN JAW KIT (7 PIECE) | MZK-24KN JAW KIT (7 PIECE) | MZK-19KN JAW KIT (7 PIECE) | | |
| | 871408 | 871409 | 871410 | | |
| | INDIVIDUAL | JAWS / PART NUMBERS | | | |
| 1/4″ | MZK-32KN JAW-1/4" | MZK-24KN JAW-1/4" | MZK-19KN JAW-1/4" | | |
| | 871428 | 871419 | 871411 | | |
| 3/8″ | MZK-32KN JAW-3/8" | MZK-24KN JAW-3/8" | MZK-19KN JAW-3/8" | | |
| | 871429 | 871420 | 871412 | | |
| 1/2″ | MZK-32KN JAW-1/2" | MZK-24KN JAW-1/2" | MZK-19KN JAW-1/2" | | |
| | 871430 | 871421 | 871413 | | |
| 5/8″ | MZK-32KN JAW-5/8" | MZK-24KN JAW-5/8" | MZK-19KN JAW-5/8" | | |
| | 871431 | 871422 | 871414 | | |
| 3/4″ | MZK-32KN JAW-3/4" | MZK-24KN JAW-3/4" | MZK-19KN JAW-3/4″ | | |
| | 871432 | 871423 | 871415 | | |
| 7/8″ | MZK-32KN JAW-7/8" | MZK-24KN JAW-7/8" | MZK-19KN JAW-7/8″ | | |
| | 871433 | 871424 | 871416 | | |
| 1-1/8″ | MZK-32KN JAW-1 1/8" | MZK-24KN JAW-1 1/8" | MZK-19KN JAW-1 1/8 | | |
| | 871435 | 871426 | 871418 | | |
| 1-3/8"* | MZK-32KN JAW-1 3/8" 871436 | | _ | | |

*Depth gauge (P/N 870517) is included with the 1-3/8" jaw.



Flame-Free Refrigerant Fittings ZoomLock[®] MAX

Original ZoomLock product is obsolete and is no longer supported.

REPLACEMENT PARTS AND ACCESSORIES



TUBING CUTTER ZoomLock approved tubing cutter.

- Description: 1/4" to 1-1/8" Capacity Tubing Cutter
- Part Number: 770006



DEBURRING TOOL ZoomLock approved deburring tool.

- Description: 1/4" to 1-3/8" Capacity Tube Deburring Tool
- Part Number: 770007



INSTALLATION KIT

3 piece kit includes depth gauge for sizes 1/4" through 1-1/8", permanent marker, and general purpose hand pad. Depth gauge for 1-3/8" fitting size sold separately.

- Description: MZK-IK
- Part Number: 870516

DEPTH GAUGE

Plastic depth gauge confirms the proper insertion depth of the tubing. For use with 1-3/8" fitting size only.

- Description: MZK-IK-22 Install Kit 1-3/8
- Part Number: 870517



641-6

2645-000

Gasket

Old to New Part Numbers Sporlan Alpha-Numeric Parts List

Sporlan has changed to a new part numbering system for the parts of some product groups. The following tables only include those items that have had a part number change. The table on this Page is sorted in alpha-numeric order on the old part number. Page 78 is a table of the same parts only sorted on the new part number.

| OLD PART NUMBER | NEW PART | DESCRIPTION | OLD PART NUMBER | NEW PART | DESCRIPTION | OLD PART NUMBER | NEW PART NUMBER | DESCRIPTION |
|--------------------|----------------------|--------------------------|--------------------|------------|----------------------------|--------------------|--------------------|--|
| 05-40-1 | 144-000 | Conduit Hub for LMC | 1542 | 1542-000 | Screen, Inlet 1/4 SAE | 6171-4 | JP-514-005 | Screen, Outlet 100 Mesl |
| 05-44 | 148-000 | Male Pipe Adaptor | 1543 | 1543-000 | Screen, Inlet 3/8 SAE | 6172-1 | JP-513-005 | Screen, Outlet 10 Mesh |
|)5-45 | 149-000 | Spacer for LMC | 1543-2 | 1543-002 | Screen, Inlet 1/4 ODF | 621-14 | 621-014 | |
| 06-A | 106-000 | Gasket, Element | 208-1 | 208-001 | Discharge Tube (D-1/32) | 621-16 | 621-016 | |
| 06-F | 123-001 | Gaskel, Element | 208-10 | 208-003 | Discharge Tube (D-7/64) | 621-18 | 621-018 | Gasket, Encl Tube |
| 08-20 | 108-000 | Discharge Tube (A-1/8) | 208-15 | 208-004 | Discharge Tube (D-5/32) | 621-19 | 621-019 | |
| 08-30 | 108-001 | Discharge Tube (A-5/32) | 208-2 | 208-002 | Discharge Tube (D-1/16) | 621-22 | 621-022 | |
| 08-50 | 108-002 | Discharge Tube (A-3/16) | 208-5 | 208-000 | Discharge Tube (D-5/64) | 621-28 | 621-028 | |
| 12-A-1 | 356-000 | Spring, Inner M/V/A | 212-A | 212-000 | | 621-31 | 621-031 | - O-Ring For SORIT/CDA |
| 14-A | 106-001 | Gasket, Bottom Cap | 212-F | 558-000 | | 621-8 | 621-008 | Gasket |
| 14-F | 123-002 | Gasket, Bottom/Bushing | 212-M | 559-000 | Spring | 712 | 712-000 | Spring, Outer V |
| 15-A | 106-002 | Gasket, Element | 212-S | 560-000 | | 717-C | 958-000 | Bottom Cap Locknut (W |
| 76 | 1176-000 | | 212-V | 561-000 | | 720 | 720-000 | Seal Cap |
| 77 | 1177-000 | Adaptar | 220-A | 220-000 | Cool Con | 728 | 728-000 | Pushrod Pckg Nut (1) |
| 178 | 1178-000 | Adaptor | 220-A-1 | 220-001 | - Seal Cap | 729 | 729-000 | Pushrod Pckg Gland (1) |
| 79 | 1179-000 | | 225-F-1/4" | 573-000 | FPT Flange | 735-A | 735-000 | Screen, Inlet Flange |
| 7-C | 358-000 | Bottom Cap Locknut (M/V) | 225-F-23 | 574-000 | Bushing, 3/8" ODF | 735-B | 961-000 | Retainer Ring, Screen |
| 2-1 | 122-000 | Screen, Inlet Flange | 225-F-24 | 574-001 | Bushing, 1/2" ODF | 736 | 736-000 | Pushrod Pckg Nut (1) |
| 23-A | 106-003 | 0.1.1.5 | 225-F-25 | 574-002 | Bushing, 5/8" ODF | 737 | 737-000 | Pushrod Pckg Gland (1) |
| 3-F | 123-000 | Gasket, Flange | 225-F-26 | 574-003 | Bushing, Solder | 738 | 738-000 | Spring |
| 4-A | 124-000 | Ring, Inlet Strainer | 225-F-27 | 574-004 | Bushing, 7/8" ODF | 740 | 123-005 | Gasket, Bottom Cap |
| 5-0 | 377-000 | Flange, Socket Weld | 225-F-29 | 575-000 | Bushing, 1-1/8" ODF | 741 | 123-004 | Gasket, Flange |
| 5-F-11F | 368-001 | Bushing, 1-3/8" ODF | 225-F-3/8" | 573-001 | FPT Flange, 3/8 FPT | 742-1-1/8" | 742-000 | |
| 5-F-13F | 370-000 | Bushing, 1-5/8" ODF | 225-G | 576-000 | Flange, 3/8 - 7/8" ODF | 742-1-3/8″ | 742-001 | |
| 5-F-1" | 362-000 | FPT Flange | 225-H | 577-000 | Flange, 1-1/8" ODF | 742-1-5/8″ | 742-002 | – Flange, Solder |
| 5-F-1-1/8" | 361-001 | | 225-K | 578-000 | Retainer Ring, Screen | 742-2-1/8″ | 742-003 | |
| 5-F-1-3/8" | 363-000 | Flange, Solder | 225-L | 579-000 | | 825-11 | 825-011 | |
| 5-F-1-5/8" | 364-000 | | 225-M | 580-000 | – Flange, Socket Weld | 825-4 | 825-004 | |
| 25-F-1/2" | 360-000 | | 225-M-1/2" | 225-002 | | 825-5 | 825-005 | 40 Mesh Strainer |
| 25-F-3/4" | 360-001 | FPT Flange | 225-M-1/4" | 225-000 | FPT Flange | 825-7 | 825-007 | |
| 25-F-7F | 367-001 | Bushing, 7/8" ODF | 225-M-3/8" | 225-001 | | 825-9 | 825-009 | - |
| 25-F-7/8 | 361-000 | Flange, Solder | 226-K | 226-000 | Screen, Inlet Flange | 838 | 838-000 | CRO-6/ORI-6 Caps |
| 25-F-9F | 368-000 | Bushing, 1-1/8" ODF | 319-A | 106-005 | Gasket, Seal Cap | 877-11 | 877-011 | |
| 25-L-7 | 372-000 | 2 doining, 1 1/0 021 | 327-D | 588-000 | Screen, Inlet 3/8 SAE | 877-3 | 877-003 | - |
| 25-L-9 | 373-000 | Flange, Angle Solder | 327-E | 589-000 | Screen, Inlet 1/2 SAE | 877-4 | 877-004 | - |
| 25-M-1″ | 375-000 | | 327-G | 590-000 | Screen, Inlet 5/8 SAE | 877-5 | 877-005 | – 100 Mesh Strainer |
| 25-M-1/2" | 374-000 | FPT Flange | 412-HV | 698-000 | | 877-7 | 877-007 | - |
| 25-M-3/4" | 374-001 | | 412-MF | 694-000 | - | 877-9 | 877-009 | - |
| 25-N | 376-000 | Flange, Socket Weld | 412-MFL | 696-000 | - | JP-1023 | JP-1023-000 | S/A Dust Cvr, 1/2 Up |
| .8 | 128-000 | Pushrod Packing Nut | 412-S | 692-000 | - Spring | JP-1066 | JP-1066-000 | Color Tag (SAK-16) |
| .o !8-A | 128-001 | Pushrod Pckg Nut (1) | 412-SL | 695-000 | - | JP-1067 | JP-1067-000 | Color Tag (SAK-13) |
| 29-A | 129-000 | Pushrod Pckg Gland (1) | 412-3L | 697-000 | - | JP-1072-1 | JP-1072-001 | Saddle Adaptor, 1-3/8 |
| 39 19 | 139-000 | Capscrew, Element (A) | 4163-9 | JP-711-000 | Bolt/Nut, 5/16 x 1.5 Steel | JP-1072-2 | JP-1072-002 | Saddle Adaptor, 1-5/8 |
| 12-DG | 1412-000 | Capscrew, Liement (A) | 420-B | 20326-000 | Seal Cap | JP-1072-3 | JP-1072-002 | Saddle Adaptor, 2-1/8 |
| 12-DG | | | 472-D | 770-000 | Screen, Inlet 3/8 SAE | JP-1099 | JP-1099-000 | |
| | 1031-000 | Spring | | | Screen, Inlet 1/4 SAE | | 1 | S/A Dust Cvr, 1/4 & 3/8 Adaptor, Cap Tube |
| 12-VG 12-VG-1 | 1030-000 1284-000 | Spring | 427-F | 772-000 | , , , | JP-232 | JP-232-000 | Gasket, Copper 3/8 SAE |
| | | | 6153-2 | 1288-005 | Gasket, Endplate | JP-543-1 | JP-543-001 | |
| 12-VG-2 | 1285-000 | Carean Inlat 1/0 CAF | 6154 | JP-335-001 | Endplate (Plain) | JP-543-2 | JP-543-002 | Gasket, Copper 1/2 SAE |
| 156 | 1456-000 | Screen, Inlet 1/2 SAE | 6154-2 | JP-335-000 | Endplate "-G" Type | JP-534-3 | JP-543-003 | Gasket, Copper 5/8 SAE |
| 524 | 1524-000 | Screen, Inlet 3/8 ODF | 6155-2 | JP-571-000 | Gasket, Outlet Seal | JP-543-4 | JP-543-004 | SPL Gskt, Copper 1/4 |
| 32-1 | 1532-000 | Spring | 6162 | JP-679-000 | Plate, Core Retainer | JP-543-5 | JP-543-005 | SPL Gskt, Copper 3/8 |
| 38 | 1538-000 | Screen, Inlet 3/8 SAE | 6163 | JP-676-000 | Plate, Outlet Core Ret | JP-543-6 | JP-543-006 | SPL Gskt, Copper 1/2 |
| 477-1 | 173-000 | Strainer | | | | | | |

New to Old Part Numbers Sporlan Alpha-Numeric Parts List

| NEW PART NUMBER | OLD PART NUMBER | DESCRIPTION | NEW PART NUMBER | OLD PART NUMBER | DESCRIPTION | NEW PART NUMBER | OLD PART NUMBER | DESCRIPTION |
|--------------------|--------------------|--------------------------|--------------------|--------------------|--------------------------|--------------------|--------------------|---------------------------|
| 1030-000 | 1412-VG | | 356-000 | 112-A-1 | Spring, Inner M/V/A) | 697-000 | 412-V | |
| 031-000 | 1412-FG | Spring | 358-000 | 117-C | Bottom Cap Locknut (M/V) | 698-000 | 412-HV | Spring |
| 06-000 | 106-A | Gasket, Element | 360-000 | 125-F-1/2" | | 712-000 | 712 | Spring, Outer V |
| 06-001 | 114-A | Gasket, Bottom Cap | 360-001 | 125-F-3/4" | FPT Flange | 720-000 | 720 | Seal Cap |
| 06-002 | 115-A | Gasket, Element | 361-000 | 125-F-7/8" | | 728-000 | 728 | Pushrod Pckg Nut (1) |
| 06-003 | 123-A | Gasket, Flange | 361-001 | 125-F-1-1/8" | Flange, Solder | 729-000 | 729 | Pushrod Pckg Gland (1) |
| 06-005 | 319-A | Gasket, Seat Cap | 362-000 | 125-F-1" | FPT Flange | 735-000 | 735-A | Screen, Inlet Flange |
| 08-000 | 108-20 | Discharge Tube (A-1/8) | 363-000 | 125-F-1-3/8" | | 736-000 | 736 | Pushrod Pckg Nut (1) |
| 08-001 | 108-30 | Discharge Tube (A-5/32) | 364-000 | 125-F-1-5/8" | Flange, Solder | 737-000 | 737 | Pushrod Pckg Gland (1) |
| 08-002 | 108-50 | Discharge Tube (A-3/16) | 367-001 | 125-F-7F | Bushing, 7/8" ODF | 738-000 | 738 | Spring |
| 176-000 | 1176 | 210011a1go 1abo (710,707 | 368-000 | 125-F-9F | Bushing, 1-1/8" ODF | 742-000 | 742-1-1/8″ | |
| 177-000 | 1170 | | 368-001 | 125-F-11F | Bushing, 1-3/8" ODF | 742-001 | 742-1-3/8″ | Flamma Californ |
| 178-000 | 1178 | Adaptor | 370-000 | 125-F-13F | Bushing, 1-5/8" ODF | 742-002 | 742-1-5/8″ | Flange, Solder |
| 179-000 | 1179 | | 372-000 | 125-L-7 | | 742-003 | 742-2-1/8″ | |
| | | Carean Inlat Flance | 372-000 | 125-L-7 | Flange, Angle Solder | 772-000 | 427-F | Screen, Inlet 1/4 SAE |
| 22-000 | 122-1 | Screen, Inlet Flange | | | | 825-004 | 825-4 | |
| 23-000 | 123-F | Gasket, Flange | 374-000 | 125-M-1/2" | | 825-005 | 825-5 | |
| 23-001 | 106-F | Gasket, Element | 374-001 | 125-M-3/4" | FPT Flange | 825-007 | 825-7 | 40 Mesh Strainer |
| 23-002 | 114-F | Gasket, Bottom/Bushing | 375-000 | 125-M-1" | | 825-009 | 825-9 | |
| 23-004 | 741 | Gasket, Flange | 376-000 | 125-N | Flange, Socket Weld | 825-011 | 825-11 | |
| 23-005 | 740 | Gasket, Bottom Cap | 377-000 | 125-0 | | 838-000 | 838 | CRO-6/ORI-6 Caps |
| 24-000 | 124-A | Ring, Inlet Strainer | 558-000 | 212-F | | 877-003 | 877-3 | |
| 284-000 | 1412-VG-1 | Spring | 559-000 | 212-M | Spring | 877-004 | 877-4 | |
| 285-000 | 1412-VG-2 | | 560-000 | 212-S | | 877-005 | 877-5 | |
| 288-005 | 6153-2 | Gasket, Endplate | 561-000 | 212-V | | 877-007 | 877-7 | 100 Mesh Strainer |
| 28-000 | 128 | Pushrod Packing Nut | 573-000 | 225-F-1/4" | FPT Flange | 877-009 | 877-9 | |
| 28-001 | 128-A | Pushrod Pckg Nut (1) | 573-001 | 225-F-3/8" | | 877-011 | 877-11 | |
| 29-000 | 129-A | Pushrod Pckg Gland (1) | 574-000 | 225-F-23 | Bushing, 3/8" ODF | 958-000 | 717-C | Bottom Cap Locknut (W) |
| 39-000 | 139 | Capscrew, Element (A) | 574-001 | 225-F-24 | Bushing, 1/2" ODF | 961-000 | 735-B | Retainer Ring, Screen |
| 412-000 | 1412-DG | Spring | 574-002 | 225-F-25 | Bushing, 5/8" ODF | JP-1023-000 | JP-1023 | S/A Dust Cvr, 1/2 Up |
| 44-000 | 105-40-1 | Conduit Hub for LMC | 574-003 | 225-F-26 | Bushing, Solder | JP-1066-000 | JP-1066 | Color Tag (SAK-16) |
| 456-000 | 1456 | Screen, Inlet 1/2 SAE | 574-004 | 225-F-27 | Bushing, 7/8" ODF | JP-1067-000 | JP-1067 | Color Tag (SAK-13) |
| 48-000 | 105-44 | Male Pipe Adaptor | 575-000 | 225-F-29 | Bushing, 1-1/8" ODF | JP-1072-001 | JP-1072-1 | Saddle Adaptor, 1-3/8 |
| 49-000 | 105-45 | Spacer for LMC | 576-000 | 225-G | Flange, 3/8 - 7/8" ODF | JP-1072-002 | JP-1072-2 | Saddle Adaptor, 1-5/8 |
| 524-000 | 1524 | Screen, Inlet 3/8 ODF | 577-000 | 225-H | Flange, 1-1/8" Odf | JP-1072-003 | JP-1072-3 | Saddle Adaptor, 2-1/8 |
| 532-000 | 1532-1 | Spring | 578-000 | 225-K | Retainer Ring, Screen | JP-1099-000 | JP-1099 | S/A Dust Cvr, 1/4 & 3/8 |
| 538-000 | 1538 | Screen, Inlet 3/8 SAE | 579-000 | 225-L | | JP-232-000 | JP-232 | Adaptor, Cap Tube |
| 542-000 | 1542 | Screen, Inlet 1/4 SAE | 580-000 | 225-M | Flange, Socket Weld | JP-335-000 | 6154-2 | Endplate "-G" Type |
| 543-000 | 1543 | Screen, Inlet 3/8 SAE | 588-000 | 227-D | Screen, Inlet 3/8" SAE | JP-335-001 | 6154 | Endplate (Plain) |
| 543-002 | 1543-2 | Screen, Inlet 1/4 ODF | 589-000 | 227-E | Screen, Inlet 1/2" SAE | JP-513-005 | 6172-1 | Screen Outlet 10 Mesh |
| 08-000 | 208-5 | Discharge Tube (D-5/64) | 590-000 | 227-G | Screen, Inlet 5/8" SAE | JP-514-005 | 6171-4 | Screen Outlet 100 Mesh |
| 08-001 | 208-1 | Discharge Tube (D-1/32) | 621-008 | 621-8 | Gasket | JP-543-001 | JP-543-1 | Gasket, Copper 3/8 SAE |
| 08-002 | 208-2 | Discharge Tube (D-1/16) | 621-014 | 621-14 | | JP-543-002 | JP-543-2 | Gasket, Copper 1/2 SAE |
| 08-002 | 208-10 | Discharge Tube (D-7/64) | 621-016 | 621-16 | | JP-543-003 | JP-543-3 | Gasket, Copper 5/8 SAE |
| 08-003 | 208-15 | Discharge Tube (D-5/32) | 621-018 | 621-18 | Gasket, Enclosing Tube | JP-543-004 | JP-543-4 | SPL Gskt, Copper 1/4 |
| 0326-000 | 420-B | Seal Cap | 621-019 | 621-10 | Caokoc, Enclosing Tube | JP-543-005 | JP-543-5 | SPL Gskt, Copper 3/8 |
| 12-000 | 420-B | | 621-013 | 621-22 | - | JP-543-006 | JP-543-6 | SPL Gskt, Copper 1/2 |
| | | Spring | 621-022 | 621-22 | | JP-571-000 | 6155-2 | Gasket, Outlet Seal |
| 20-000 | 220-A | Seal Cap | | | O-Ring for SORIT/CDA | JP-676-000 | 6163 | Plate, Outlet Core Ret |
| 20-001 | 220-A-1 | | 621-031 | 621-31 | | JP-679-000 | 6162 | Plate, Core Retainer |
| 25-000 | 225-M-1/4" | | 692-000 | 412-S | - | JP-711-000 | 4163-9 | Bolt/Nut, 5/16 x 1.5 Stee |
| 25-001 | 225-M-3/8" | FPT Flange | 694-000 | 412-MF | Spring | | | |
| 25-002 | 225-M-1/2" | | 695-000 | 412-SL | | | | |
| 26-000 | 226-K | Screen, Inlet Flange | 696-000 | 412-FML | | | | |

PARKER-HANNIFIN CORPORATION OFFER OF SALE

1. <u>Definitions.</u> As used herein, the following terms have the meanings indicated.

Buyer: means any customer receiving a Quote for Products.

Goods: means any tangible part, system or component to be supplied by Seller.

Products: means the Goods, Services and/or Software as described in a Quote.

Quote: means the offer or proposal made by Seller to Buyer for the supply of Products.

Seller: means Parker-Hannifin Corporation, including all divisions and businesses thereof.

Services: means any services to be provided by Seller.

Software: means any software related to the Goods, whether embedded or separately downloaded.

Terms: means the terms and conditions of this Offer of Sale.

2. <u>Terms.</u> All sales of Products by Seller are expressly conditioned upon, and will be governed by the acceptance of, these Terms. These Terms are incorporated into any Quote provided by Seller to Buyer. Buyer's order for any Products whether communicated to Seller verbally, in writing, by electronic data interface or other electronic commerce, shall constitute acceptance of these Terms. Seller objects to any contrary or additional terms or conditions of Buyer. Reference in Seller's order acknowledgement to Buyer's purchase order or purchase order number shall in no way constitute an acceptance of any of Buyer's terms or conditions of purchase. No modification to these Terms will be binding on Seller unless agreed to in writing and signed by an authorized representative of Seller.

3. <u>Price: Payment.</u> The Products set forth in the Quote are offered for sale at the prices indicated in the Quote. Unless otherwise specifically stated in the Quote, prices are valid for thirty (30) days and do not include any sales, use, or other taxes or duties. Seller reserves the right to modify prices at any time to adjust for any raw material price fluctuations. Unless otherwise specified by Seller, all prices are F.C.A. Seller's facility (INCOTERMS 2020). All sales are contingent upon credit approval and full payment for all purchases is due thirty (30) days from the date of invoice (or such date as may be specified in the Quote). Unpaid invoices beyond the specified payment date incur interest at the rate of 1.5% per month or the maximum allowable rate under applicable law.

4. Shipment; Delivery; Title and Risk of Loss. All delivery dates are approximate, and Seller is not responsible for damages resulting from any delay. Regardless of the manner of shipment, delivery occurs and title and risk of loss or damage pass to Buyer, upon placement of the Products with the carrier at Seller's facility. Unless otherwise agreed prior to shipment and for domestic delivery locations only, Seller will select and arrange, at Buyer's sole expense, the carrier and means of delivery. When Seller selects and arranges the carrier and means of delivery, freight and insurance costs for shipment to the designated delivery location will be prepaid by Seller and added as a separate line item to the invoice. Buyer shall be responsible for any additional shipping charges incurred by Seller due to Buyer's acts or omissions. Buyer shall not return or repackage any Products without the prior written authorization from Seller, and any return shall be at the sole cost and expense of Buyer.

5. <u>Warranty.</u> The warranty for the Products is as follows: (i) Goods are warranted against defects in material or workmanship for a period of twelve (12) months from the date of delivery or 2,000 hours of use, whichever occurs first; (ii) Services shall be performed in accordance with generally accepted practices and using the degree of care and skill that is ordinarily exercised and customary in the field to which the Services pertain and are warranted for a period of six (6) months from the date of completion of the Services; and (iii) Software is only warranted to perform in accordance with applicable specifications provided by Seller to Buyer for ninety (90) days from the date of delivery or, when downloaded by a Buyer or end-user, from the date of the initial download. All prices are based upon the exclusive limited warranty stated above, and upon the following disclaimer: EXEMPTION CLAUSE; DISCLAIMER OF WARRANTY, CONDITIONS, REPRESENTATIONS: THIS WARRANTY IS THE SOLE AND ENTIRE WARRANTY, CONDITION, AND **REPRESENTATION, PERTAINING TO PRODUCTS. SELLER DISCLAIMS** ALL OTHER WARRANTIES, CONDITIONS, AND REPRESENTATIONS, WHETHER STATUTORY, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THOSE RELATING TO DESIGN, NONINFRINGEMENT, MER-CHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE. SELLER DOES NOT WARRANT THAT THE SOFTWARE IS ERROR-FREE OR FAULT-TOLERANT, OR THAT BUYER'S USE THEREOF WILL BE SECURE OR UNINTERRUPTED. UNLESS OTHERWISE AUTHORIZED IN WRITING BY SELLER, THE SOFTWARE SHALL NOT BE USED IN CONNECTION

WITH HAZARDOUS OR HIGH RISK ACTIVITIES OR ENVIRONMENTS. EXCEPT AS EXPRESSLY STATED HEREIN, ALL PRODUCTS ARE PRO-VIDED "AS IS".

6. <u>Claims; Commencement of Actions.</u> Buyer shall promptly inspect all Products upon receipt. No claims for shortages will be allowed unless reported to Seller within ten (10) days of delivery. Buyer shall notify Seller of any alleged breach of warranty within thirty (30) days after the date the non-conformance is or should have been discovered by Buyer. Any claim or action against Seller based upon breach of contract or any other theory, including tort, negligence, or otherwise must be commenced within twelve (12) months from the date of the alleged breach or other alleged event, without regard to the date of discovery.

7. LIMITATION OF LIABILITY. IN THE EVENT OF A BREACH OF WAR-RANTY, SELLER WILL, AT ITS OPTION, REPAIR OR REPLACE THE NON-CONFORMING PRODUCT, RE-PERFORM THE SERVICES, OR REFUND THE PURCHASE PRICE PAID WITHIN A REASONABLE PERIOD OF TIME. IN NO EVENT IS SELLER LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES INCLUDING ANY LOSS OF REVENUE OR PROFITS, WHETHER BASED IN CONTRACT, TORT OR OTHER LEGAL THEORY. IN NO EVENT SHALL SELLER'S LIABILITY UNDER ANY CLAIM MADE BY BUYER EXCEED THE PURCHASE PRICE PAID FOR THE PRODUCTS.

8. <u>Confidential Information</u>. Buyer acknowledges and agrees that any technical, commercial, or other confidential information of Seller, including, without limitation, pricing, technical drawings or prints and/or part lists, which has been or will be disclosed, delivered or made available, whether directly or indirectly, to Buyer ("Confidential Information"), has been and will be received in confidence and will remain the property of Seller. Buyer further agrees that it will not use Seller's Confidential Information for any purpose other than for the benefit of Seller.

9. Loss to Buyer's Property. Any tools, patterns, materials, equipment or information furnished by Buyer or which are or become Buyer's property ("Buyer's Property"), will be considered obsolete and may be destroyed by Seller after two (2) consecutive years have elapsed without Buyer ordering the Products manufactured using Buyer's Property. Furthermore, Seller shall not be responsible for any loss or damage to Buyer's Property while it is in Seller's possession or control.

10. <u>Special Tooling.</u> "Special Tooling" includes but is not limited to tools, jigs, fixtures and associated manufacturing equipment acquired or necessary to manufacture Goods. Seller may impose a tooling charge for any Special Tooling. Such Special Tooling shall be and remain Seller's property notwithstanding payment of any charges by Buyer. In no event will Buyer acquire any interest in the Special Tooling, even if such Special Tooling has been specially converted or adapted for manufacture of Goods for Buyer and notwithstanding any charges paid by Buyer. Unless otherwise agreed, Seller has the right to alter, discard or otherwise dispose of any Special Tooling or other property owned by Seller in its sole discretion at any time.

11. <u>Security Interest.</u> To secure payment of all sums due from Buyer, Seller retains a security interest in all Products delivered to Buyer and, Buyer's acceptance of these Terms is deemed to be a Security Agreement under the Uniform Commercial Code. Buyer authorizes Seller as its attorney to execute and file on Buyer's behalf all documents Seller deems necessary to perfect Seller's security interest.

12. <u>User Responsibility</u>. Buyer, through its own analysis and testing, is solely responsible for making the final selection of the Products and assuring that all performance, endurance, maintenance, safety and warning requirements of the application of the Products are met. Buyer must analyze all aspects of the application and follow applicable industry standards, specifications, and any technical information provided with the Quote or the Products, such as Seller's instructions, guides and specifications. If Seller provides options of or for Products based upon data or specifications provided by Buyer, Buyer is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the Products. In the event Buyer is not the end-user of the Products, Buyer will ensure such end-user complies with this paragraph.

13. <u>Use of Products, Indemnity by Buyer.</u> Buyer shall comply with all instructions, guides and specifications proviwded by Seller with the Quote or the Products. <u>Unauthorized Uses</u>. If Buyer uses or resells the Products in any way prohibited by Seller's instructions, guides or specifications, or Buyer otherwise fails to comply with Seller's instructions, guides and specifications, Buyer acknowledges that any such use, resale, or non-compliance is at Buyer's sole risk. Further, Buyer shall indemnify, defend, and hold Seller harmless from any losses, claims, liabilities, damages, lawsuits, judgments and costs (including attorney fees and defense costs), whether for personal injury, property damage, intellectual property infringement or any other claim, arising out of or in connection with: (a) improper selection, design,

PARKER-HANNIFIN CORPORATION OFFER OF SALE (Continued)

specification, application, or any misuse of Products; (b) any act or omission, negligent or otherwise, of Buyer; (c) Seller's use of patterns, tools, equipment, plans, drawings, designs, specifications or other information or things furnished by Buyer; (d) damage to the Products from an external cause, repair or attempted repair by anyone other than Seller, failure to follow instructions, guides and specifications provided by Seller, use with goods not provided by Seller, or opening, modifying, deconstructing, tampering with or repackaging the Products; or (e) Buyer's failure to comply with these Terms. Seller shall not indemnify Buyer under any circumstance except as otherwise provided in these Terms.

14. <u>Cancellations and Changes.</u> Buyer may not cancel or modify, including but not limited to movement of delivery dates for the Products, any order for any reason except with Seller's written consent and upon terms that will indemnify, defend and hold Seller harmless against all direct, incidental and consequential loss or damage and any additional expense. Seller, at any time, may change features, specifications, designs and availability of Products.

15. <u>Limitation on Assignment.</u> Buyer may not assign its rights or obligations without the prior written consent of Seller.

16. Force Majeure. Seller is not liable for delay or failure to perform any of its obligations by reason of events or circumstances beyond its reasonable control. Such circumstances include without limitation: accidents, labor disputes or stoppages, government acts or orders, acts of nature, pandemics, epidemics, other widespread illness, or public health emergency, delays or failures in delivery from carriers or suppliers, shortages of materials, war (whether declared or not) or the serious threat of same, riots, rebellions, acts of terrorism, fire or any reason whether similar to the foregoing or otherwise. Seller will resume performance as soon as practicable after the event of force majeure has been removed. All delivery dates affected by force majeure shall be tolled for the duration of such force majeure and rescheduled for mutually agreed dates as soon as practicable after the force majeure shall not include financial distress, insolvency, bankruptcy, or other similar conditions affecting one of the parties, affiliates and/ or sub-contractors.

17. <u>Waiver and Severability</u>. Failure to enforce any provision of these Terms will not invalidate that provision; nor will any such failure prejudice either party's right to enforce that provision in the future. Invalidation of any provision of these Terms shall not invalidate any other provision herein and, the remaining provisions will remain in full force and effect.

18. <u>Termination.</u> Seller may terminate any agreement governed by or arising from these Terms for any reason and at any time by giving Buyer thirty (30) days prior written notice. Seller may immediately terminate, in writing, if Buyer: (a) breaches any provision of these Terms, (b) becomes or is deemed insolvent, (c) appoints or has appointed a trustee, receiver or custodian for all or any part of Buyer's property, (d) files a petition for relief in bankruptcy on its own behalf, or one is filed against Buyer by a third party, (e) makes an assignment for the benefit of creditors; or (f) dissolves its business or liquidates all or a majority of its assets.

19. <u>Ownership of Software.</u> Seller retains ownership of all Software supplied to Buyer hereunder. In no event shall Buyer obtain any greater right in and to the Software than a right in the nature of a license limited to the use thereof and subject to compliance with any other terms provided with the Software.

20. Indemnity for Infringement of Intellectual Property Rights. Seller is not liable for infringement of any patents, trademarks, copyrights, trade dress, trade secrets or similar rights ("Intellectual Property Rights") except as provided in this Section. Seller will defend at its expense and will pay the cost of any settlement or damages awarded in an action brought against Buyer based on a third party claim that one or more of the Products sold hereunder infringes the Intellectual Property Rights of a third party in the country of delivery of the Products by Seller to Buyer. Seller's obligation to defend and indemnify Buyer is contingent on Buyer notifying Seller within ten (10) days after Buyer becomes aware of any such claim, and Seller having sole control over the defense of the claim including all negotiations for settlement or compromise. If one or more Products sold hereunder is subject to such a claim, Seller may, at its sole expense and option, procure for Buyer the right to continue using the Products, replace or modify the Products so as to render them non-infringing, or offer to accept return of the Products and refund the purchase price less a reasonable allowance for depreciation. Seller has no obligation or liability for any claim of infringement: (i) arising from information provided by Buyer; or (ii) directed to any Products provided hereunder for which the designs are specified in whole or part by Buyer; or (iii) resulting from the modification, combination or use in a system of any Products provided hereunder. The foregoing provisions of this Section constitute Seller's sole and exclusive liability and Buyer's sole and exclusive remedy for claims of infringement of Intellectual Property Rights.

21. <u>Governing Law.</u> These Terms and the sale and delivery of all Products are deemed to have taken place in, and shall be governed and construed in accordance with, the laws of the State of Ohio, as applicable to contracts executed and wholly performed therein and without regard to conflicts of laws principles. Buyer irrevocably agrees and consents to the exclusive jurisdiction and venue of the courts of Cuyahoga County, Ohio with respect to any dispute, controversy or claim arising out of or relating to the sale and delivery of the Products.

22. Entire Agreement. These Terms, along with the terms set forth in the main body of any Quote, forms the entire agreement between the Buyer and Seller and constitutes the final, complete and exclusive expression of the terms of sale and purchase. In the event of a conflict between any term set forth in the main body of a Quote and these Terms, the terms set forth in the main body of the Quote shall prevail. All prior or contemporaneous written or oral agreements or negotiations with respect to the subject matter shall have no effect. These Terms may not be modified unless in writing and signed by an authorized representative of Seller.

23. Compliance with Laws. Buyer agrees to comply with all applicable laws, regulations, and industry and professional standards, including those of the United States of America, and the country or countries in which Buyer may operate, including without limitation the U.S. Foreign Corrupt Practices Act ("FCPA"), the U.S. Anti-Kickback Act ("Anti-Kickback Act"), U.S. and E.U. export control and sanctions laws ("Export Laws"), the U.S. Food Drug and Cosmetic Act ("FDCA"), and the rules and regulations promulgated by the U.S. Food and Drug Administration ("FDA"), each as currently amended. Buyer agrees to indemnify, defend, and hold harmless Seller from the consequences of any violation of such laws, regulations and standards by Buyer, its employees or agents. Buyer acknowledges that it is familiar with all applicable provisions of the FCPA, the Anti-Kickback Act, Export Laws, the FDCA and the FDA and certifies that Buyer will adhere to the requirements thereof and not take any action that would make Seller violate such requirements. Buyer represents and agrees that Buyer will not make any payment or give anything of value, directly or indirectly, to any governmental official, foreign political party or official thereof, candidate for foreign political office, or commercial entity or person, for any improper purpose, including the purpose of influencing such person to purchase Products or otherwise benefit the business of Seller. Buyer further represents and agrees that it will not receive, use, service, transfer or ship any Products from Seller in a manner or for a purpose that violates Export Laws or would cause Seller to be in violation of Export Laws. Buyer agrees to promptly and reliably provide Seller all requested information or documents, including end-user statements and other written assurances, concerning Buyer's ongoing compliance with Export Laws.

© 2023 Parker Hannifin Corporation.



Parker Hannifin Corporation **Sporlan Division** 206 Lange Drive • Washington, MO 63090 USA phone 636 239 1111 sporlan.com Bulletin 122 / 62023