


EMERGENCY SHOWERS EYEWASHX

The most popular combination unit of drench shower cum eyewash for any industry, this unit is highly recommended in all accident / contamination prone areas.

GENERAL FEATURES

- Shower and Eyewash Bowl: 280mm (11") dia bowls are injection moulded in chemical resistant ABS in bright yellow.
- Eyewash Assembly:
 Stainless steel with ABS sprayhead with instant flip-open protective dust-covers. The built-in automatic pressure compensating valve assures safe steady flow under varying water supply conditions. Sprayheads also include a filter to protect users against particles from the water flow which may be damaging to the eyes and face.
- Control Valve:

 1" fast-action stainless steel(316) ball valve is used for the shower assembly with a stainless steel pull rod. 1/2" fast-action stainless steel(316) ball valve is used for the eyewash assembly with a stainless steel push plate.
- Pedestal: 250mm (10") dia aluminium pedestal with 3 mounting holes for 9mm bolts. Pedestal is epoxy powder coated in bright yellow.
- Pipe and Fitting:
 " Galvanised Iron pipe epoxy powder coated in bright yellow.
- Waste:
 1" IPS.
- Certified to: ANSI / SEAZ358.81 - 2009 AS 4775-2007
- Water Supply:
 1" IPS.
- Signage: Drench Shower and Eyewash.
- Pipe Threads:
 Pipe threads in accordance to BS supplied as standard.

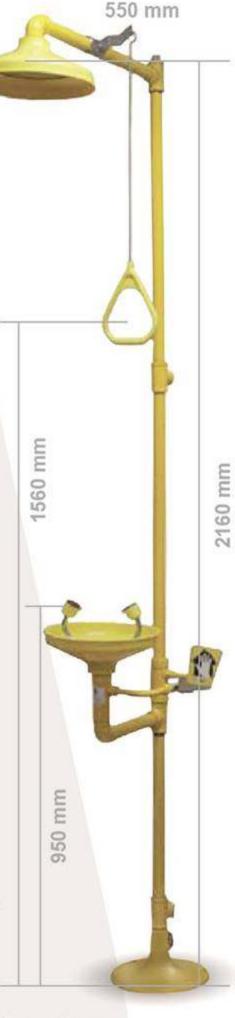

Singapore

Malaysia

Myanmar

Indonesia

Thailand

U.A.E .

Vietnam