MOTOMAN GP165R



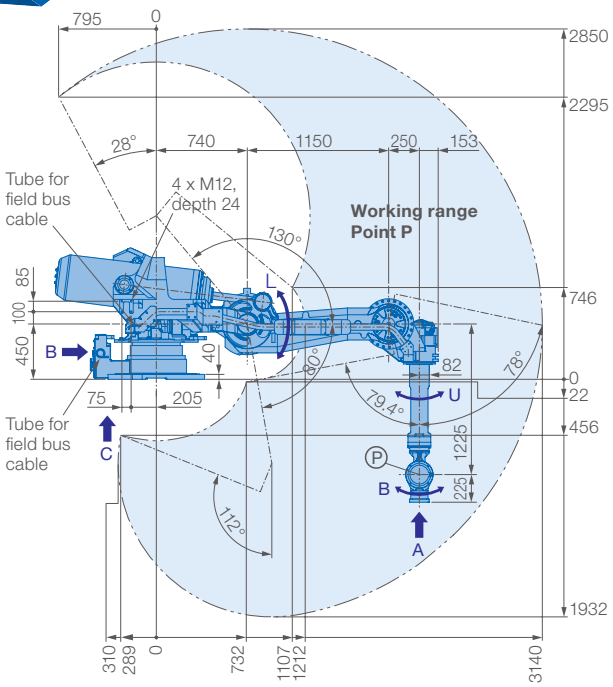

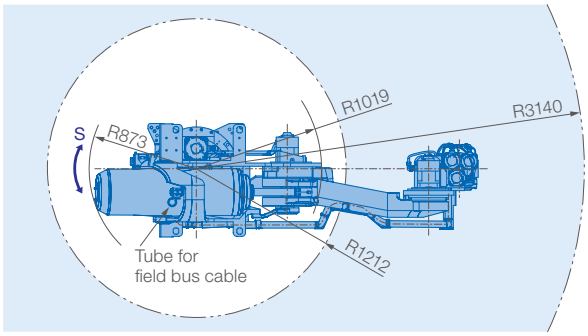

View A

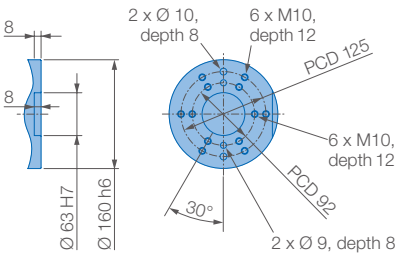

View B

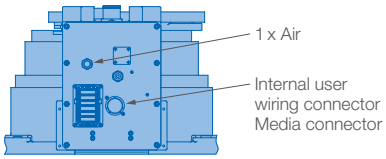

View C

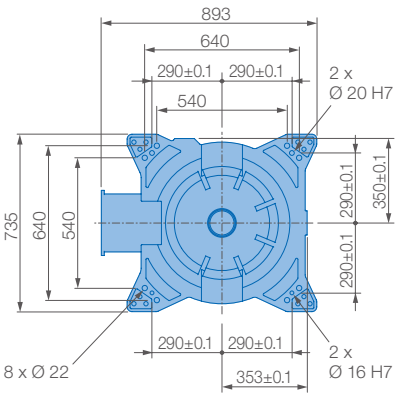

Mounting option: Shelf-mounted

Protection class: IP54/67

Allowable wrist load

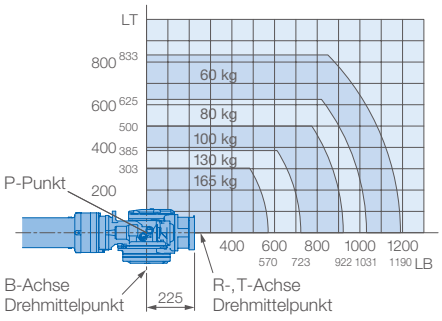

View D

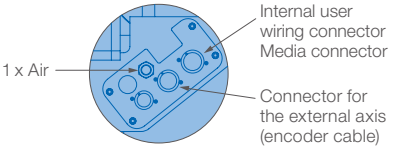

Specifications GP165R						
Axes	**Maximum motion range [°]**	**Maximum speed [°/s]**	**Allowable moment [Nm]**	**Allowable moment of inertia [kg · m²]**	**Controlled axes**	6
					Max. payload [kg]	165
S	±180	105	–	–	**Repeatability [mm]**	±0.05
L	+80/–130	105	–	–	**Max. working range R [mm]**	3143
U	+78/–79.4	105	–	–	**Temperature [°C]**	0 to +45
R	±360	175	921	85	**Humidity [%]**	20 – 80
B	±130	150	921	85	**Weight [kg]**	1760
T	±360	240	490	45	**Power supply, average [kVA]**	5