MOTOMAN GP200R



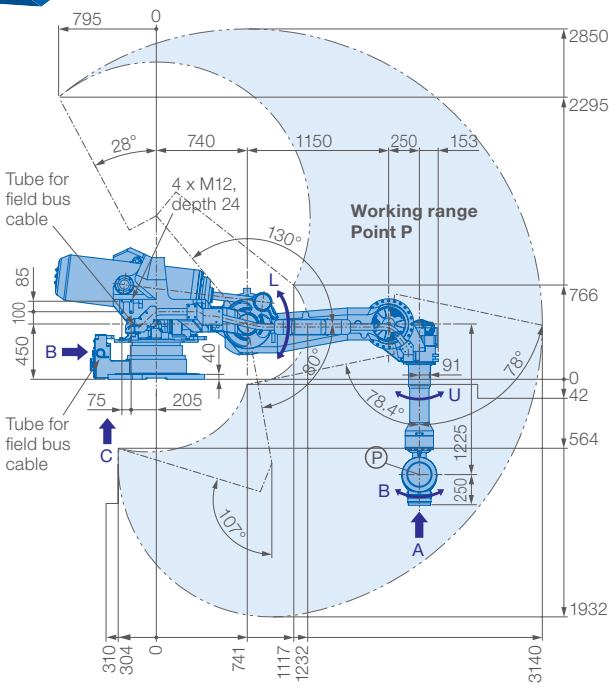

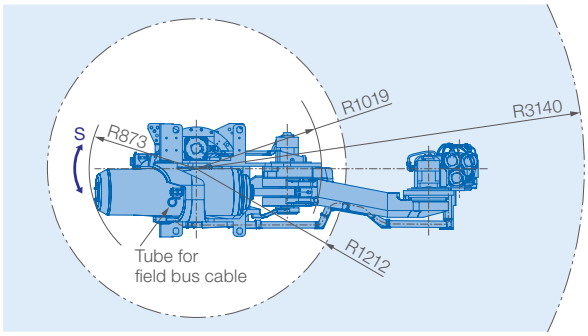

Allowable wrist load

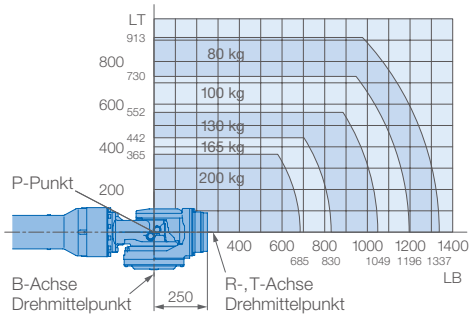

View A

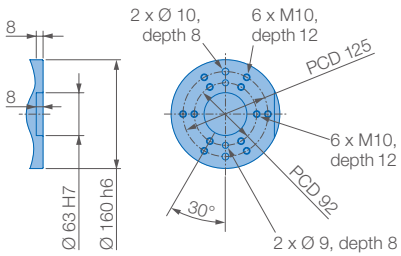

View B

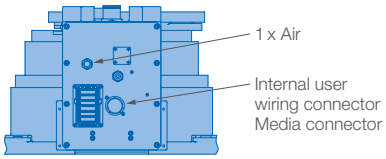

View C

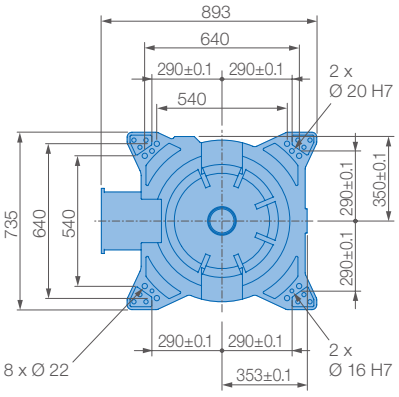

Mounting option: Shelf-mounted

Protection class: IP54/67

View D

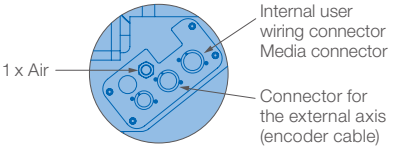

Specifications GP200R						
Axes	**Maximum motion range [°]**	**Maximum speed [°/s]**	**Allowable moment [Nm]**	**Allowable moment of inertia [kg · m²]**	**Controlled axes**	6
					Max. payload [kg]	200
S	±180	90	–	–	**Repeatability [mm]**	±0,05
L	+80/–130	85	–	–	**Max. working range R [mm]**	3140
U	+78/–78.4	85	–	–	**Temperature [°C]**	0 to +45
R	±360	120	1344	143	**Humidity [%]**	20 – 80
B	±125	120	1344	143	**Weight [kg]**	1830
T	±360	190	715	80	**Power supply, average [kVA]**	5