MOTOMAN GP300R

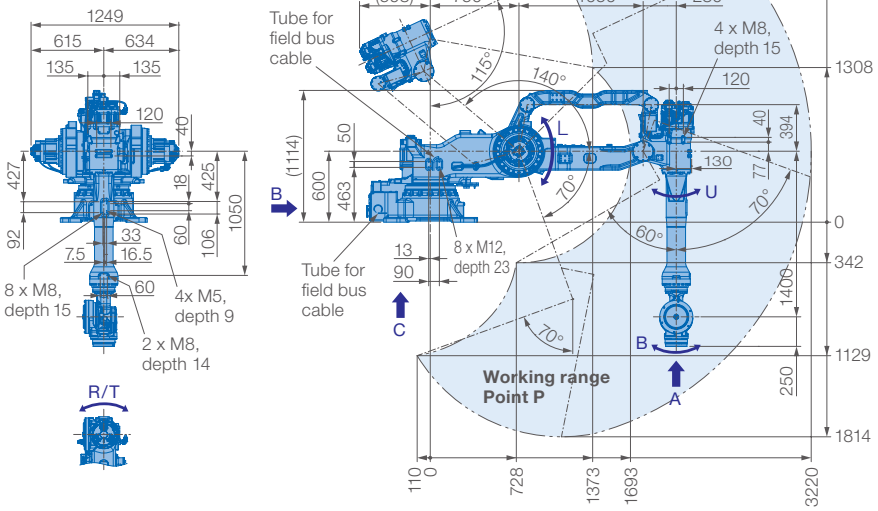

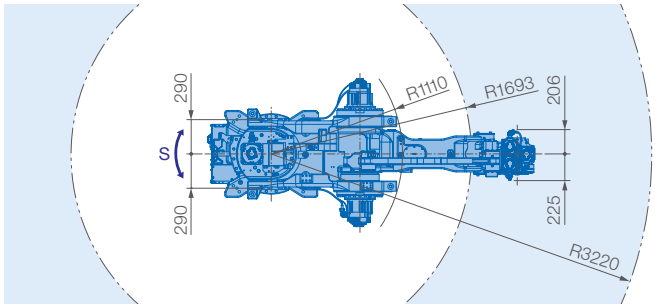

Allowable wrist load

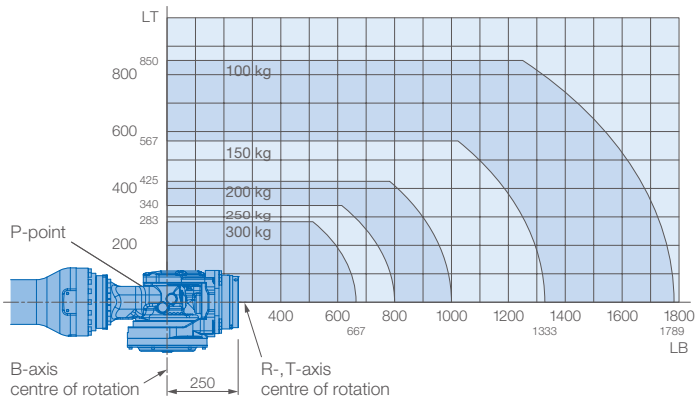

View A

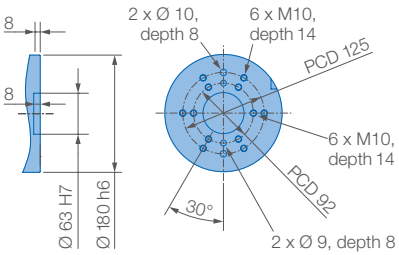

View B

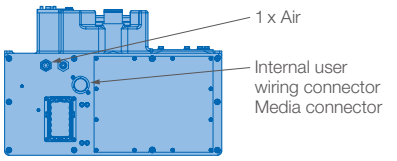

View C

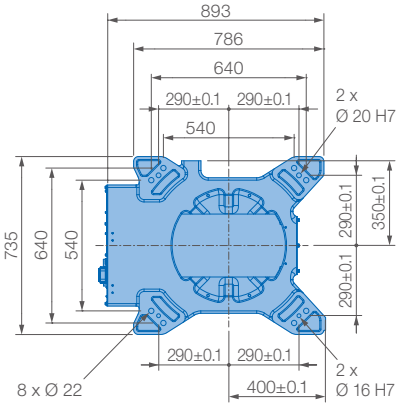

Mounting option: Shelf-mounted

Protection class: IP54/67

View D

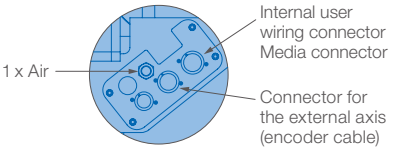

Specifications GP300R						
Axes	**Maximum motion range [°]**	**Maximum speed [°/s]**	**Allowable moment [Nm]**	**Allowable moment of inertia [kg · m²]**	**Controlled axes**	6
S	±180	110	–	–	**Max. payload [kg]**	300
L	+70/–140	95	–	–	**Repeatability [mm]**	±0.2
U	+115/–70	95	–	–	**Max. working range R [mm]**	3220
R	±360	120	1962	320	**Temperature [°C]**	0 to +45
B	±125	120	1962	320	**Humidity [%]**	20 – 80
T	±360	190	834	200	**Weight [kg]**	1530
					Power supply, average [kVA]	5.0