

# GAS-Rp-NPSM-NPSF



GAS Rp NPSM NPSF

**Il prodotto: preciso, affidabile, curato e tutto by UFS**

*The product: precise, reliable, accurate, all made by UFS*

*Le produit : précis, fiable et tout par UFS*

**PRECISION**





N


USO GENERALE

General purpose - Usage Général

MASCHI A MACCHINA


MACHINE TAPS - TARAUDS MACHINE

DIN 5156



LINE

LINE

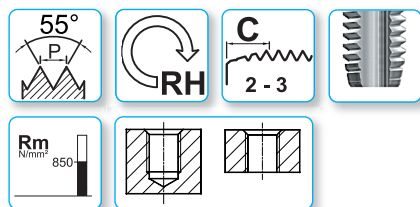

Profond. di filettatura - Thread depth - Profond. de filetage

Materiale - Material - Matériau

Tolleranza - Tolerance - Tolérance

Trattamento superficiale - Surface treatment - Revêtement

Numero gruppi materiali

Material's groups number

Nombre de groupes du matériau

1,5xD

1,5xD

HSSE

HSSE

ISO 228

ISO 228

BR

TiN

1.1 1.2 1.3 1.4 3.4

1.1 1.2 1.3 1.4 3.4

4.2 4.3 5.2 5.3

4.2 4.3 5.2 5.3

8.2

8.2

| DIN 5156 | Ød1<br>GAS | P<br>TPI | Ø<br>mm | L <sub>1</sub> | L <sub>2</sub> | d <sub>2</sub><br>h9 | a<br>h12 | Z |       |
|----------|------------|----------|---------|----------------|----------------|----------------------|----------|---|-------|
|          | 1/8        | 28       | 9,73    | 90             | 15             | 7                    | 5,5      | 3 | 8,8   |
|          | 1/4        | 19       | 13,16   | 100            | 22             | 11                   | 9        | 3 | 11,8  |
|          | 3/8        | 19       | 16,66   | 100            | 22             | 12                   | 9        | 3 | 15,25 |
|          | 1/2        | 14       | 20,96   | 125            | 25             | 16                   | 12       | 4 | 19    |
|          | 5/8        | 14       | 22,91   | 125            | 25             | 18                   | 14,5     | 4 | 21    |
|          | 3/4        | 14       | 26,44   | 140            | 25             | 20                   | 16       | 4 | 24,5  |
|          | 7/8        | 14       | 30,20   | 150            | 28             | 22                   | 18       | 4 | 28,25 |
|          | 1"         | 11       | 33,25   | 160            | 30             | 25                   | 20       | 5 | 30,75 |
|          | 1" 1/8     | 11       | 37,90   | 170            | 30             | 28                   | 22       | 6 | 35,5  |
|          | 1" 1/4     | 11       | 41,91   | 170            | 30             | 32                   | 24       | 6 | 39,5  |
|          | 1" 1/2     | 11       | 47,8    | 190            | 32             | 36                   | 29       | 6 | 45,25 |
|          | 1" 3/4     | 11       | 53,75   | 190            | 32             | 40                   | 32       | 6 | 51,1  |
|          | 2"         | 11       | 59,61   | 220            | 40             | 45                   | 35       | 6 | 57,2  |
|          | 2" 1/2     | 11       | 75,18   | 250            | 50             | 45                   | 35       | 8 | 72,6  |

■ = Acciaio HSS / HSS Steel / Acier HSS

CODICE - CODE

E21G...

E21G...T

●

○

●

○

●

○

●

○

○

○

●

○

●

○

●

○

●

○

●

○

●

○

●

○

○

○

Confezione / Box / Colis:  
1/8 G: 10 pezzi / pcs  
1/4 G - 3/8: 5 pezzi / pcs

€ Pag. listino - Price list - Liste des prix

93

93


● Standard

○ Disponibilità da richiedere, prezzo a listino  
On enquiry, standard price-list / Stock à vérifier

★ Solo a richiesta  
Only on request / Sur demande

## MASCHI A MACCHINA

MACHINE TAPS - TARAUDS MACHINE



Profond. di filettatura - Thread depth - Profond. de filetage

**Materiale** - *Material* - *Matériau*

**Tolleranza** - *Tolerance* - *Tolérance*

Trattamento superficiale - Surface treatment - Revêtement

Al Si>10%,  
Ottone / Brass / Laiton  
Bronzo / Bronze / Bronze  
truciolo corto / short chip /  
coupeaux courts

Numero gruppi materiali

Material's groups number

Nombre de groupes du matériau


| DIN<br>5156                                                                        | Ød1<br>GAS    | P<br>TPI  | Ø<br>mm | L <sub>1</sub> | L <sub>2</sub> | d <sub>2</sub><br>h9 | a<br>h12 | Z |  |
|------------------------------------------------------------------------------------|---------------|-----------|---------|----------------|----------------|----------------------|----------|---|-------------------------------------------------------------------------------------|
|                                                                                    | <b>1/8</b>    | <b>28</b> | 9,73    | 90             | 15             | 7                    | 5,5      | 4 | 8,8                                                                                 |
|                                                                                    | <b>1/4</b>    | <b>19</b> | 13,16   | 100            | 22             | 11                   | 9        | 4 | 11,8                                                                                |
|                                                                                    | <b>3/8</b>    | <b>19</b> | 16,66   | 100            | 22             | 12                   | 9        | 4 | 15,25                                                                               |
|                                                                                    | <b>1/2</b>    | <b>14</b> | 20,96   | 125            | 25             | 16                   | 12       | 4 | 19                                                                                  |
|                                                                                    | <b>5/8</b>    | <b>14</b> | 22,91   | 125            | 25             | 18                   | 14,5     | 4 | 21                                                                                  |
|                                                                                    | <b>3/4</b>    | <b>14</b> | 26,44   | 140            | 25             | 20                   | 16       | 4 | 24,5                                                                                |
|                                                                                    | <b>7/8</b>    | <b>14</b> | 30,20   | 150            | 28             | 22                   | 18       | 4 | 28,25                                                                               |
|                                                                                    | <b>1"</b>     | <b>11</b> | 33,25   | 160            | 30             | 25                   | 20       | 5 | 30,75                                                                               |
|                                                                                    | <b>1" 1/8</b> | <b>11</b> | 37,90   | 170            | 30             | 28                   | 22       | 6 | 35,5                                                                                |
|                                                                                    | <b>1" 1/4</b> | <b>11</b> | 41,91   | 170            | 30             | 32                   | 24       | 6 | 39,5                                                                                |
|  | <b>1" 1/2</b> | <b>11</b> | 47,8    | 190            | 32             | 36                   | 29       | 6 | 45,25                                                                               |

■ = Acciaio HSS / HSS Steel / Acier HSS

| LINE                                                                              | LINE                                                                               | TOP                                                                                 | TOP                                                                                 |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |
| 3xD                                                                               | 3xD                                                                                | 3xD                                                                                 | 3,5xD                                                                               |
| HSSE                                                                              | HSSE                                                                               | PM3                                                                                 | PM3                                                                                 |
| ISO 228X                                                                          | ISO 228X                                                                           | ISO 228X                                                                            | ISO 228X                                                                            |
| NQ                                                                                | TiCN                                                                               | TiAlN                                                                               | TiAlN                                                                               |
| 3.1 3.2 3.3 3.4 3.5<br>4.3 4.4 4.5 4.6 5.3<br>8.2 10.1                            | 3.1 3.2 3.3 3.4 3.5<br>4.3 4.4 4.5 4.6 5.3<br>8.2 10.1                             | 3.1 3.2 3.3 3.4 3.5<br>4.4 5.3 5.4<br>10.1                                          | 3.1 3.2 3.3 3.4 3.5<br>4.4 5.3 5.4<br>10.1                                          |

| CODICE - CODE |  |           |            |   |               |
|---------------|--|-----------|------------|---|---------------|
| E27G...NQ     |  | E27G...CT |            |   |               |
| ○             |  | ●         |            |   |               |
| ○             |  | ●         |            |   |               |
| ○             |  | ●         |            |   |               |
| ○             |  | ●         |            |   |               |
| ○             |  | ○         |            |   |               |
| ○             |  | ○         |            |   |               |
| ○             |  | ○         |            |   |               |
| ○             |  | ○         |            |   |               |
| ○             |  | ○         |            |   |               |
| ○             |  | ○         |            |   |               |
| ○             |  | ○         |            |   |               |
| -             |  | -         | *K27G...TX | * | K27G...FOR-TX |
| -             |  | -         | ○          | ○ |               |
| -             |  | -         | ○          | ○ |               |
| -             |  | -         | ○          | ○ |               |
| -             |  | -         | ○          | ○ |               |
| -             |  | -         | ○          | ○ |               |
|               |  |           |            |   |               |
|               |  |           |            |   |               |
|               |  |           |            |   |               |
|               |  |           |            |   |               |
|               |  |           |            |   |               |
|               |  |           |            |   |               |
|               |  |           |            |   |               |
|               |  |           |            |   |               |
|               |  |           |            |   |               |
|               |  |           |            |   |               |
|               |  |           |            |   |               |


A richiesta:  
On request:  
Sur demande:



**E**

**1,5 -2**

A richiesta:  
On request:  
Sur demande:



1,5 -2

Confezione / Box / Colis:  
1/8 G: 10 pezzi / pcs  
1/4 G - 3/8 G: 5 pezzi / pcs

€ Pag. listino - Price list - Liste des prix

- Standard

93

- Disponibilità da richiedere, prezzo a listino  
*On enquiry, standard price-list / Stock à vérifier*

93

93

★ Solo a richiesta  
Only on request / Sur demande

93

N



USO GENERALE

General purpose - Usage Général

MASCHI A MACCHINA

MACHINE TAPS - TARAUDS MACHINE

DIN 5156

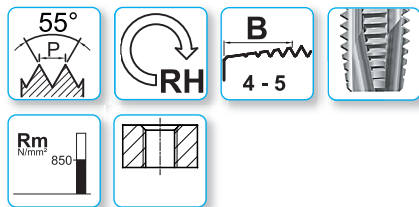

Profond. di filettatura - Thread depth - Profond. de filetage

Materiale - Material - Matériau

Tolleranza - Tolerance - Tolérance

Trattamento superficiale - Surface treatment - Revêtement

Numero gruppi materiali

Material's groups number

Nombre de groupes du matériau

LINE



LINE



LINE



LINE



3xD

HSSE

ISO 228

BR

1.1 1.2 1.3 1.4

4.1 4.2

5.1 5.2

3xD

HSSE

ISO 228

V

1.1 1.2 1.3 1.4

4.1 4.2

5.1 5.2

6.1 7.1

3xD

HSSE

ISO 228

TiN

1.1 1.2 1.3 1.4

3.3 3.4

4.1 4.2 4.3

5.1 5.2

3xD

HSSE

ISO 228

XP

1.1 1.2 1.3 1.4

2.1 2.2 3.3 3.4

4.2 4.3

5.2

| DIN 5156 | Ød1<br>GAS | P<br>TPI | Ø<br>mm | L <sub>1</sub> | L <sub>2</sub> | d <sub>2</sub><br>h9 | a<br>h12 | Z |       |
|----------|------------|----------|---------|----------------|----------------|----------------------|----------|---|-------|
|          | 1/8        | 28       | 9,73    | 90             | 15             | 7                    | 5,5      | 3 | 8,8   |
|          | 1/4        | 19       | 13,16   | 100            | 22             | 11                   | 9        | 3 | 11,8  |
|          | 3/8        | 19       | 16,66   | 100            | 22             | 12                   | 9        | 4 | 15,25 |
|          | 1/2        | 14       | 20,96   | 125            | 25             | 16                   | 12       | 4 | 19    |
|          | 5/8        | 14       | 22,91   | 125            | 25             | 18                   | 14,5     | 4 | 21    |
|          | 3/4        | 14       | 26,44   | 140            | 25             | 20                   | 16       | 4 | 24,5  |
|          | 7/8        | 14       | 30,20   | 150            | 28             | 22                   | 18       | 4 | 28,25 |
|          | 1"         | 11       | 33,25   | 160            | 30             | 25                   | 20       | 5 | 30,75 |
|          | 1 1/8      | 11       | 37,90   | 170            | 30             | 28                   | 22       | 6 | 35,5  |
|          | 1 1/4      | 11       | 41,91   | 170            | 30             | 32                   | 24       | 6 | 39,5  |
|          | 1 1/2      | 11       | 47,8    | 190            | 32             | 36                   | 29       | 6 | 45,25 |
|          | 1 3/4      | 11       | 53,75   | 190            | 32             | 40                   | 32       | 6 | 51,10 |
|          | 2"         | 11       | 59,61   | 220            | 40             | 45                   | 35       | 6 | 57,2  |

■ = Acciaio HSS / HSS Steel / Acier HSS

| Confezione / Box / Colis:                             | € Pag. listino - Price list - Liste des prix | 93                                                                                                    | 93 | 94                                                  | 94 |
|-------------------------------------------------------|----------------------------------------------|-------------------------------------------------------------------------------------------------------|----|-----------------------------------------------------|----|
| 1/8 G: 10 pezzi / pcs<br>1/4 G - 3/8 G: 5 pezzi / pcs | ● Standard                                   | ○ Disponibilità da richiedere, prezzo a listino<br>On enquiry, standard price-list / Stock à vérifier |    | ★ Solo a richiesta<br>Only on request / Sur demande |    |

GAS






## MASCHI A MACCHINA

### MACHINE TAPS - TARAUDS MACHINE

INOX

ACCIAIO INOSSIDABILE  
Stainless steel - Acier inoxydable

DIN  
5156



TOP



Profond. di filettatura - Thread depth - Profond. de filetage

Materiale - Material - Matériau

Tolleranza - Tolerance - Tolérance

Trattamento superficiale - Surface treatment - Revêtement

3xD

HSSV3

ISO 228X

TXC

1.3 1.4 1.5

2.1 2.2 2.3 2.4

Numero gruppi materiali  
Material's groups number  
Nombre de groupes du matériau

| DIN<br>5156 | Ød1<br>GAS | P<br>TPI | Ø<br>mm | L <sub>1</sub> | L <sub>2</sub> | d <sub>2</sub><br>h9 | a<br>h12 | Z |       |
|-------------|------------|----------|---------|----------------|----------------|----------------------|----------|---|-------|
|             | 1/8        | 28       | 9,73    | 90             | 15             | 7                    | 5,5      | 3 | 8,8   |
|             | 1/4        | 19       | 13,16   | 100            | 22             | 11                   | 9        | 4 | 11,8  |
|             | 3/8        | 19       | 16,66   | 100            | 22             | 12                   | 9        | 4 | 15,25 |
|             | 1/2        | 14       | 20,96   | 125            | 25             | 16                   | 12       | 4 | 19    |
|             | 3/4        | 14       | 26,44   | 140            | 25             | 20                   | 16       | 4 | 24,5  |

CODICE - CODE

V25G...TXC

○

○

○

○

○

Confezione / Box / Colis:  
1/8 G: 10 pezzi / pcs  
1/4 G - 3/8 G: 5 pezzi / pcs

€ Pag. listino - Price list - Liste des prix

94

● Standard

○ Disponibilità da richiedere, prezzo a listino  
On enquiry, standard price-list / Stock à vérifier

★ Solo a richiesta  
Only on request / Sur demande









INOX


ACCIAIO INOSSIDABILE

Stainless steel - Acier inoxydable

MASCHI A MACCHINA

MACHINE TAPS - TARAUDS MACHINE


DIN 5156



TOP



R48°

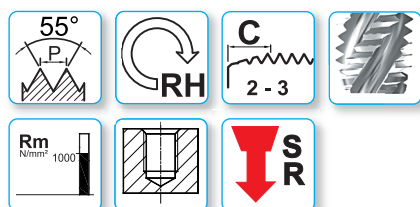

Profond. di filettatura - Thread depth - Profond. de filetage

3,5xD

Materiale - Material - Matériau

HSSV3

Tolleranza - Tolerance - Tolérance

ISO 228X

Trattamento superficiale - Surface treatment - Revêtement

TXC

Numero gruppi materiali

Material's groups number

Nombre de groupes du matériau

1.3 1.4 1.5

2.1 2.2 2.3 2.4

| DIN 5156 | Ød1<br>GAS | P<br>TPI | Ø<br>mm | L <sub>1</sub> | L <sub>2</sub> | d <sub>2</sub><br>h9 | a<br>h12 | Z |       |
|----------|------------|----------|---------|----------------|----------------|----------------------|----------|---|-------|
|          | 1/8        | 28       | 9,73    | 90             | 15             | 7                    | 5,5      | 3 | 8,8   |
|          | 1/4        | 19       | 13,16   | 100            | 15             | 11                   | 9        | 3 | 11,8  |
|          | 3/8        | 19       | 16,66   | 100            | 15             | 12                   | 9        | 4 | 15,25 |
|          | 1/2        | 14       | 20,96   | 125            | 18             | 16                   | 12       | 4 | 19    |
|          | 3/4        | 14       | 26,44   | 140            | 20             | 20                   | 16       | 4 | 24,5  |
|          | 1"         | 11       | 33,25   | 160            | 24             | 25                   | 20       | 5 | 30,75 |

CODICE - CODE

V83G...TXC



RACCOMANDATO per filettatura rigida  
We recommend Syncro rigid threading  
Recommandé pour le taraudage rigide



Confezione / Box / Colis:  
6 – 7/16: 10 pezzi / pcs  
1/2 – 9/16: 5 pezzi / pcs  
Oltre / up: singoli / single pcs

€ Pag. listino - Price list - Liste des prix

96

● Standard

○ Disponibilità da richiedere, prezzo a listino  
On enquiry, standard price-list / Stock à vérifier

★ Solo a richiesta  
Only on request / Sur demande




## ISO 228

Calibri a tampone filettati passa / non passa

Thread plug gauges go/no-go

Calibres de filetage entre/n'entre pas



**Tolleranza** - *Tolerance* - *Tolérance*

—

### Trattamento superficiale - Surface treatment - Revêtement

BR

[illegible]

Confezione: Singola  
Box: Single  
Colis: Unique

€ Pag. listino - Price list - Liste des prix

110

- Standard

○ Disponibilità da richiedere, prezzo a listino  
*On enquiry, standard price-list / Stock à vérifier*

★ Solo a richiesta  
Only on request / Sur demande



N

USO GENERALE

General purpose - Usage Général

## MASCHI A MACCHINA

MACHINE TAPS - TARAUDS MACHINE

DIN  
5156

LINE



LINE



Profond. di filettatura - Thread depth - Profond. de filetage

1,5xD

1,5xD

Materiale - Material - Matériau

HSSE

HSSE

Tolleranza - Tolerance - Tolérance

ISO 5969

ISO 5969

Trattamento superficiale - Surface treatment - Revêtement

BR

TiN

Numero gruppi materiali

Material's groups number

Nombre de groupes du matériau

1.1 1.2 1.3 1.4 3.4

1.1 1.2 1.3 1.4 3.4

4.2 4.3 5.2 5.3

4.2 4.3 5.2 5.3

8.2

8.2

| DIN<br>5156 | Ød1<br>GAS | P<br>TPI | Ø<br>mm | L <sub>1</sub> | L <sub>2</sub> | d <sub>2</sub><br>h9 | a<br>h12 | Z |  |
|-------------|------------|----------|---------|----------------|----------------|----------------------|----------|---|-------------------------------------------------------------------------------------|
|             | 1/8        | 28       | 9,73    | 90             | 15             | 7                    | 5,5      | 3 | 8,6                                                                                 |
|             | 1/4        | 19       | 13,16   | 100            | 22             | 11                   | 9        | 3 | 11,5                                                                                |
|             | 3/8        | 19       | 16,66   | 100            | 22             | 12                   | 9        | 3 | 15                                                                                  |
|             | 1/2        | 14       | 20,96   | 125            | 25             | 16                   | 12       | 4 | 18,5                                                                                |
|             | 3/4        | 14       | 26,44   | 140            | 25             | 20                   | 16       | 4 | 24                                                                                  |
|             | 1"         | 11       | 33,25   | 160            | 30             | 25                   | 20       | 5 | 30,25                                                                               |
|             | 1 1/4"     | 11       | 41,91   | 170            | 30             | 32                   | 24       | 6 | 39                                                                                  |
| ■           | 1 1/2"     | 11       | 47,8    | 190            | 32             | 36                   | 29       | 6 | 45                                                                                  |
| ■           | 2"         | 11       | 59,61   | 220            | 40             | 45                   | 35       | 6 | 56,5                                                                                |

■ = Acciaio HSS / HSS Steel / Acier HSS

Per accoppiamento a tenuta sul filetto.

Where pressure-tight joints are made on the threads.

Pour une tolérance serrée sur le filet.

Für im Gewinde dichtende Verbindungen.

Para conexiones herméticas en la rosca.

CODICE - CODE

E21RP...

E21RP...T

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

○

Confezione: Singola  
Box: Single  
Colis: Unique

€ Pag. listino - Price list - Liste des prix

97

97

● Standard



○ Disponibilità da richiedere, prezzo a listino  
On enquiry, standard price-list / Stock à vérifier

★ Solo a richiesta  
Only on request / Sur demande

# NPSM NPSF



DIN  
5156

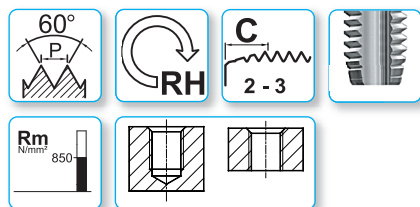

LINE



LINE



Profond. di filettatura - Thread depth - Profond. de filetage

Materiale - Material - Matériau

Tolleranza - Tolerance - Tolérance

Trattamento superficiale - Surface treatment - Revêtement

Numero gruppi materiali

Material's groups number

Nombre de groupes du matériau

1,5xD

1,5xD

HSSE

HSSE

-

-

BR

TiN

1.1 1.2 1.3 1.4 3.4

1.1 1.2 1.3 1.4 3.4

4.2 4.3 5.2 5.3

4.2 4.3 5.2 5.3

8.2

8.2

| DIN<br>5156 | Ød1  | P<br>TPI | Ø<br>mm | L <sub>1</sub> | L <sub>2</sub> | d <sub>2</sub><br>h9 | a<br>h12 | F <sub>1</sub><br>NPSM | F <sub>2</sub><br>NPSC |
|-------------|------|----------|---------|----------------|----------------|----------------------|----------|------------------------|------------------------|
| 1/8         | 27   | 10,1     | 90      | 15             | 7              | 5,5                  | 9,10     | 8,8                    |                        |
| 1/4         | 18   | 13,404   | 100     | 22             | 11             | 9                    | 12       | 11,4                   |                        |
| 3/8         | 18   | 16,843   | 100     | 22             | 12             | 9                    | 15,5     | 14,8                   |                        |
| 1/2         | 14   | 20,949   | 125     | 25             | 16             | 12                   | 19       | 18,5                   |                        |
| 3/4         | 14   | 26,296   | 140     | 25             | 20             | 16                   | 24,5     | 23,8                   |                        |
| 1"          | 11,5 | 32,895   | 160     | 30             | 25             | 20                   | 30,5     | 29,9                   |                        |

CODICE - CODE

E21NPSM...

E21NPSM...T

Filettatura gas meccanica, ex NPS. Utilizzabile anche per NPSC.  
For mechanical joints, previously NPS. Can also be used for NPSC thread.  
Filetage gaz mécanique, ancien NPS. Il peut également être utilisé pour NPSC.  
Mechanisches Rohrgewinde, früher NPS. Auch für NPSC verwendbar.  
Rosca gas mecánica, antes NPS. También utilizable para NPSC.

Confezione: Singola  
Box: Single  
Colis: Unique

€ Pag. listino - Price list - Liste des prix

97

97

● Standard

○ Disponibilità da richiedere, prezzo a listino  
On enquiry, standard price-list / Stock à vérifier


★ Solo a richiesta  
Only on request / Sur demande

N

USO GENERALE


General purpose - Usage Général

DIN 5156



LINE

LINE



Profond. di filettatura - Thread depth - Profond. de filetage

Materiale - Material - Matériau

Tolleranza - Tolerance - Tolérance

Trattamento superficiale - Surface treatment - Revêtement

Numero gruppi materiali

Material's groups number

Nombre de groupes du matériau

1,5xD

1,5xD

HSSE

HSSE

-

-

BR

TiN

1.1 1.2 1.3 1.4 3.4

1.1 1.2 1.3 1.4 3.4

4.2 4.3 5.2 5.3

4.2 4.3 5.2 5.3

8.2

8.2

| DIN 5156 | Ød1 | P TPI | Ø mm   | L <sub>1</sub> | L <sub>2</sub> | d <sub>2</sub> h9 | a h12 | F     |
|----------|-----|-------|--------|----------------|----------------|-------------------|-------|-------|
|          | 1/8 | 27    | 9,929  | 90             | 15             | 7                 | 5,5   | 8,7   |
|          | 1/4 | 18    | 13,236 | 100            | 22             | 11                | 9     | 11,30 |
|          | 3/8 | 18    | 16,673 | 100            | 22             | 12                | 9     | 14,7  |
|          | 1/2 | 14    | 20,819 | 125            | 25             | 16                | 12    | 18,2  |
|          | 3/4 | 14    | 26,166 | 140            | 25             | 20                | 16    | 23,50 |
|          | 1"  | 11,5  | 32,718 | 160            | 30             | 25                | 20    | 29,50 |

CODICE - CODE

E21NPSF...

E21NPSF...T

Filettatura a tenuta cilindrica, accoppiata con filettatura esterna conica NPTF.

Dryseal internal straight pipe thread for fuel, combined with external tapered pipe thread NPTF.

Filetage serré cylindrique, couplé avec filetage extérieur conique NPTF.

Zylindrisches Rohrdichtgewinde, gepaart mit kegeligem Außengewinde NPTF

Rosca gas hermética cilíndrica, combinada con rosca exterior cónica NPTF.

Confezione: Singola  
Box: Single  
Colis: Unique

€ Pag. listino - Price list - Liste des prix

97

97

● Standard

○ Disponibilità da richiedere, prezzo a listino  
On enquiry, standard price-list / Stock à vérifier

★ Solo a richiesta  
Only on request / Sur demande