

RESIDENTIAL ESS SOLUTION

DEYE SPRING RW SERIES



Flexible

- Support Max. 32 units in parallel
- 10A current limit, compatible with any inverter for charging/discharging
- Ideal for backup power and residential use



Reliable

- Support Max. 1C charge and discharge
- Peak discharge current of 2C 10s
- IP65 case, natural cooling
- Wide temp range : -20°C to 55°C

≥6000

Cycles

-20°C to 55°C

Wide Temp



Convenient

- Battery module auto networking (No DIP switches)
- Support Deye remotely monitoring and upgrade



Safer & Smart

- LFP battery with long lifespan, high efficiency
- Built-in circuit breaker, intelligent BMS

70%

EOL

IP65

Rated for indoor and outdoor use

Rack-Mounted Battery (LV)



Model	RW-L2.5A	RW-L5.1	RW-L10.2
Main Parameter	LiFePO ₄		
Battery Chemistry	LiFePO ₄		
Built-in Circuit Breaker	125A 1P, 60Vdc	125A 2P, 60Vdc	
Capacity (Ah) ^[1]	100	200	
Scalability	Max. 32 pcs in parallel		
Nominal Voltage (V)	25.6	51.2	
Operating Voltage (V)	22.4 ~ 28.8	44.8 ~ 57.6	
Nominal Energy (kWh) ^[1]	2.56	5.12	10.24
Usable Energy (kWh@90%DoD) ^[1]	2.3	4.61	9.22
Charge / Discharge Current (A) ^[2]	Max. Continuous Peak	100 / 120 200 / 200 (10 sec)	200 / 240 300 / 300 (10 sec)
Main Parameter	90%		
Recommend Depth of Discharge	90%		
Dimension (W × H × D, mm) (Without hanging board)	350 × 680 × 160	420 × 680 × 160	745 × 745 × 170
Weight Approximate (kg)	32	50	100
Master LED Indicator	LED (SOC and working state)		
IP Rating of Enclosure	IP65		
Operating Temperature	Charge : 0 ~ 55°C / Discharge : -20°C ~ 55°C		
Recommend Operating Temperature	15°C ~ 35°C		
Storage Temperature	0 ~ 35°C		
Relative Humidity	95%		
Altitude	≤2000m		
Cycle Life	≥6000 (25°C±2°C, 0.5C / 0.5C, 90%DOD, 70%EOL)		
Installation	Wall-Mounted, Floor-Mounted		
Communication Port	CAN2.0, RS485		
Warranty Period ^[3]	10 years		
Energy Throughput ^[3]	4MWh	8MWh	16MWh
Certification	UN38.3, MSDS		

[1] Test conditions : 25°C±2°C, at beginning of life and calibration mode, 0.5C charge & 0.5C discharge,100% DOD.

[2] The current is affected by temperature and SOC.

[3] Conditions apply, refer to Deye Warranty Letter.

Typical Application Scenarios

Product Expansion

Battery backup time

RW-L2.5A

Inverter	1h	2h	3h	4h
SUN-3K SUN SG04LP1 24EU	2 units	3 units	4 units	5 units

Battery backup time

RW-L5.1

Inverter	1h	2h	3h	4h
SUN 5KW SG 04LP1	1 units	2 units	3 units	4 units
SUN 5KW SG 03LP1				
SUN 5KW SG 04LP3				
SUN 6KW SG 04LP1	2 units	3 units	4 units	5 units
SUN 6KW SG 03LP1				
SUN 6KW SG 05LP1				
SUN 8KW SG 02LP1	2 units	4 units	5 units	7 units
SUN 8KW SG 05LP3				
SUN 8KW SG 04LP3				


Battery backup time

RW-L10.2


Inverter	1h	2h	3h	4h
SUN 8KW SG 02LP1	1 units	2 units	3 units	4 units
SUN 8KW SG 05LP3				
SUN 8KW SG 04LP3				
SUN 10KW SG 04LP3	1 units	2 units	3 units	4 units
SUN 10KW SG 02LP1				
SUN 12KW SG 04LP3	2 units	3 units	4 units	5 units
SUN 12KW SG 02LP1				
SUN 12KW SG 05LP3				
SUN 16KW SG 01LP1	2 units	4 units	5 units	7 units
SUN-15KSG05LP3	2 units	3 units	5 units	6 units
SUN-18KSG05LP3	2 units	4 units	6 units	8 units
SUN-20KSG05LP3	2 units	4 units	6 units	8 units

Typical Application Scenarios

RW-L10.2

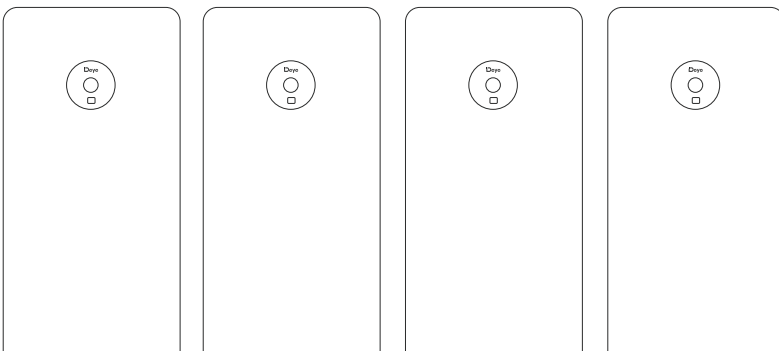

SUN-20K-SG05LP3-EU



2 h



To Make ESS Better



Deye ESS Facebook



Deye ESS



www.deyeess.com