



TIS AIR BUS CONVERTOR

Data Sheet Rev 3.2

Model: TIS-AIR-BUS



OVERVIEW

This product is an AIR-BUS converter designed to create an instant connection between TIS wireless and wired network solutions to provide maximum harmony across home automation systems. It is installed next to or behind a wired module and is programmable via TIS App.

KEY BENEFITS

- + Programming and communication port
- + Convert any TIS-BUS device to become connected to the Wi-Fi
- + TIS cloud server connection
- + Internal timer and logic

KEY FEATURES

- ★ Standard 35 mm din-rail mounted
- ★ Bidirectional convertor: AIR-BUS/ BUS-AIR
- ★ Controllable through TIS App



BARCODE (UPC-A)




TIS AIR BUS CONVERTOR



Model: TIS-AIR-BUS



PRODUCT SPECIFICATIONS			
TIS AIR	WIFI signal Protocol standard	2.4 GHz 802.11 b/g/n	
Mounting	Din rail	Standard size din rail mount	
Connection terminal	Load and power Data / Bus Panel link	Screw terminal 0,25...2mm2 Connectors link 2 female connectors for TIS panel connection	
Weight	Without packaging	20g	
Dimensions	Length x Width x Height	50mm x 24mm x 50mm	
Housing	Materials Casing color IP rating	Fireproof PC White IP 20	
Temperature range	Operation Storage Transport	-30...60°C -20...60°C -30...75°C	
Air humidity		<85% non-condensing	

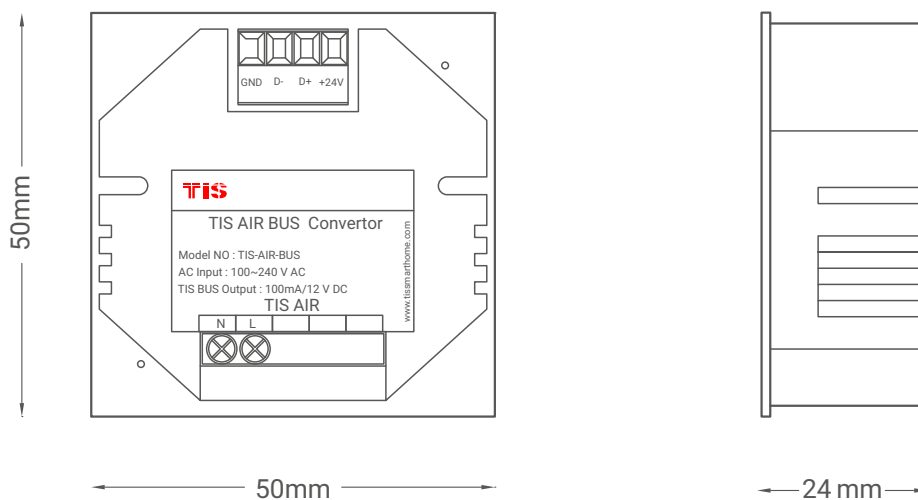

Copyright © 2022 TIS, All Rights Reserved

TIS Logo is registered trademark of TIS CONTROL.
All of the specification are subject to change without notice.

TIS CONTROL PTY LIMITED
SA , AUSTRALIA

TIS CONTROL LIMITED
Wanchai, Hong Kong