


■ DESCRIPTION

The TS-903 is a designed microphone for exclusive use with the conference units of the Infrared/Wired conference system.  
 Ring type In-Use lamp located at the microphone head permits displaying the operation status of the conference units.

■ SPECIFICATIONS

Type	Electret condenser microphone
Directivity	Unidirectional
Rated Impedance	1.8 kΩ
Rated Sensitivity	-37 dB (1 kHz 0 dB = 1 V/Pa)
LED Indicator	Speech indicator (ring type)
Frequency Response	100 Hz - 13 kHz
Output Connector	Equivalent to XLR-4-12C
Operating Temperature	0 °C to +40 °C (32 °F to 104 °F)
Operating Humidity	90 %RH or less (no condensation)
Finish	Gooseneck: Stainless steel, black Other: ABS resin, black
Weight	90 g (0.21 lb)
Applicable Unit	Chairman unit: TS-811, TS-821, TS-911, TS-921 Delegate unit: TS-812, TS-822, TS-912, TS-922

■ APPEARANCE

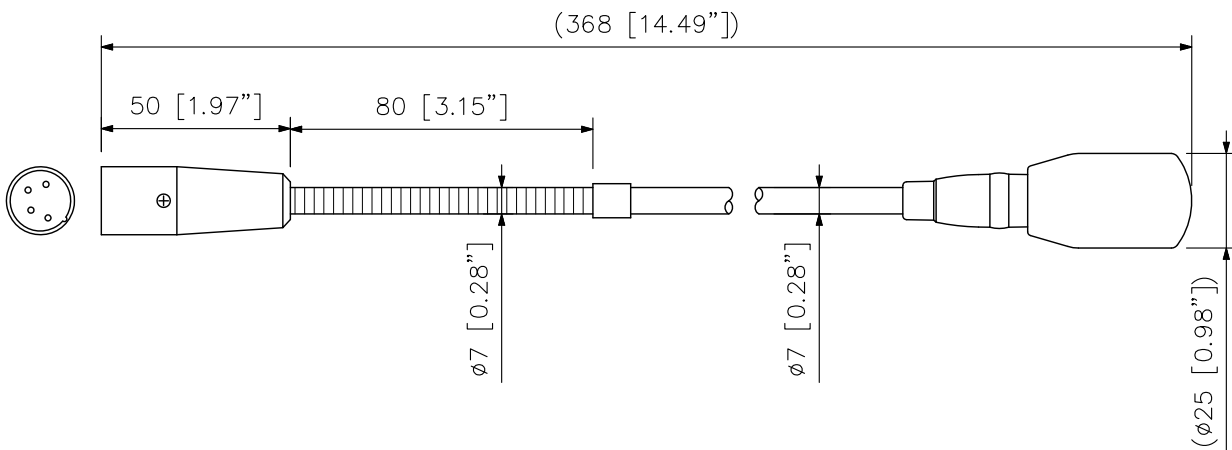

UNIT:mm SCALE:1/2

Note: Numerical values in parentheses are for reference only.