

# IR Dome Network Camera

MODEL: VIGI C230I (2.8/4mm)



H.265+

**3MP** 











# Human & Vehicle Classification

Intelligently distinguishes humans and vehicles from other objects, so you receive more accurate event notifications.











**Motion Detection** 



Line-Crossing SmartVid

**Area Intrusion** 



**Camera Tampering** 

**Object Removal** 



**Abandoned Object** 



#### **Smart IR**

Keeps objects from being under-rendered when far away or overexposed when close to camera at night.



## Wide Dynamic Range



Adjusts for lighting contrast to minimize shadowing effects and renders images true to life.




#### **3D DNR**

Removes abnormal pixelation to provide clearer video and eliminate distortion.

# VIGI Surveillance Solution

The VIGI professional surveillance system by TP-Link is dedicated to protecting the business that you've worked hard to build—whenever, wherever.

Outstanding functions, reliable quality guarantees, and simplified installation work together to ensure your business stays safe and sound.

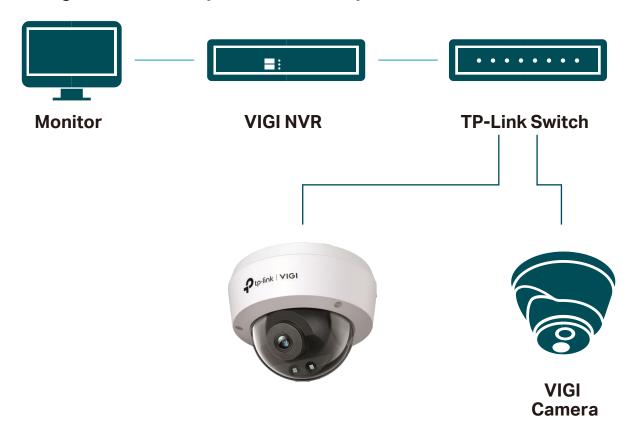

### 

## Flexible Installation

Easily route your camera's cable into a dropped ceiling or avoid drilling by slotting it through the camera's side outlet.



# Specifications

Camera		
Product Model	VIGI C230I	
ROM	128 MB	
RAM	512 MB	
Image Sensor	1/2.8" Progressive Scan CMOS	
Min. Illumination	Color: 0.1 Lux; 0 Lux with IR	
Day & Night	IR Cut Filter	
Digital Noise Reduction	3D DNR	
WDR	DWDR	
Lens		
Focal Length	2.8 mm/4 mm	
Aperture	2.8mm: F2. 2 4mm: F2.0	
FOV	2.8mm: 97.8°/52.9°/117.9° (H/V/D) 4mm: 82.5°/44.9°/99.3° (H/V/D)	
Focus	Fixed	
Lens Mount	M12	
IR		
IR Range	30m	
Wavelength	850nm	
Compression Standard		
Video Compression	Main Stream: H.265+/H.265/H.264+/H.264 Sub-Stream: H.265/H.264	
H.264 Type	Main Profile/High Profile	
H.264+	Main Stream Supported	

H.265 Type	Main Profile	
H.265+	Main Stream Supported	
Video Bit Rate	64 Kbps to 4 Mbps	
Image		
Max. Resolution	3MP (2304 × 1296)	
Main Stream	Frame Rate: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps, 30fps Resolution: 2304x1296, 2048x1280, 1920x1080, 1280x720	
Sub-Stream	Frame Rate: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps, 30fps Resolution: 704x576,640x480, 352x288,320x240	
Image Settings	Mirror, brightness, contrast, saturation, sharpness, exposure, WDR, white balance, HLC adjustable by client software, Rotation (90°/270°)	
Image Enhancement	BLC/3D DNR/HLC/SmartIR	
Day/Night Switch	Day/Night/Auto/Schedule	
Smart Feature-set		
Smart Event	Intrusion Detection. Line-Crossing Detection, Region Entering Detection, Region Exiting Detection, Object Abandoned Detection, Object Removal Detection, Loitering Detection, Smart Frame, People Detection, Vehicle Detection, Motion Detection, Video Tampering Detection, Exception (Illegal Login), Scene Change Detection	
Basic Event	Motion Detection, Video Tampering Detection, Exception (illegal login)	
Linkage Method	Trigger Notification: ONVIF, HTTPS	
Region of Interest	1 Region	
Network		
Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS., DHCP, DNS, RTSP, NTP, UPnP, SSL/TLS, FTP, SFTP, RTP, IPv4, IPv6, ARP	
General Function	Two Streams, Mirror, Privacy Masks, Password Reset via E-mail, HTTP Listening	
Cyber Security	Video encryption, Configuration encryption, Digest Authentication, HTTPS, IP Address Filter, trusted upgrade	

SDK and API	Beta
Security	Password Protection, HTTPS Encryption, IP Address Filter, Digest Authentication
User/Host	Up to 32 Users
Simultaneous Live View	3 Main Streams & 3 Sub-Streams
Client	VIGI App, VIGI Security Manager, VIGI NVR, Web
Cloud	Yes
ONVIF	Yes (Profile S)
Interface	
Network Interface	1 RJ45 10/100M Self-Adaptive Port
Storage	FTP, SFTP
Video Output	No
Reset Button	N/A
General	
Operating Temperature -	-30–60 °C
Power Supply	12V DC ± 5%, 5.5mm Coaxial Power Plug PoE (802.3af/at, class 0)
Power Consumption	12V DC: Max 5W PoE: class 0
Ingression Protection I	IP67
Vandal Resistant	IK10
Material	Plastic
Product Dimensions	115 ×115 × 86 mm
Certifications	CE/BSMI/VCCI/ONVIF

Specifications are subject to change without notice and can be found at www.tp-link.com. ©2022 TP-Link