

Datasheet Security Never Shuts Down

Outdoor IR Bullet Network Camera

MODEL: VIGI C330I (2.8/4/6mm)



Human & Vehicle Classification

Intelligently distinguishes humans and vehicles from other objects, so you receive more accurate event notifications.



3MP











Human & Vehicle Classification Smart Detection

IP67

SmartVid

Remote Monitoring



Smart Detection








Line-Crossing

SmartVid 🖉



Area Intrusion



* 🗄

Object Removal



Camera Tampering

Abandoned Object



Smart IR

Keeps objects from being under-rendered when far away or overexposed when close to camera at night.



Wide Dynamic Range

Adjusts for lighting contrast to minimize shadowing effects and renders images true to life.




3D DNR

Removes abnormal pixelation to provide clearer video and eliminate distortion.

VIGI Surveillance Solution


The VIGI professional surveillance system by TP-Link is dedicated to protecting the business that you've worked hard to build—whenever, wherever.

Outstanding functions, reliable quality guarantees, and simplified installation work together to ensure your business stays safe and sound.

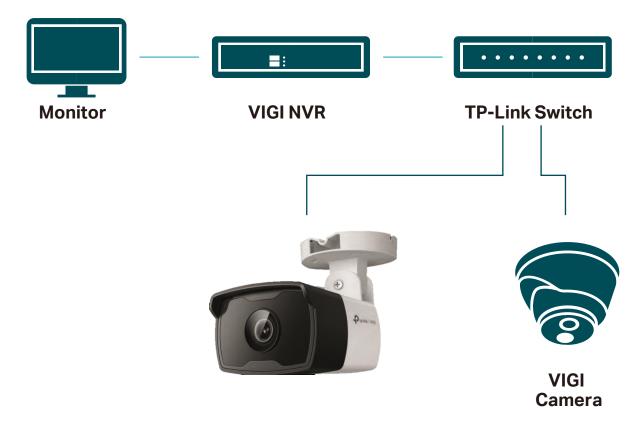

Flexible Installation

Find the perfect vantage point by simply securing your camera to the ceiling, wall, or pole*.

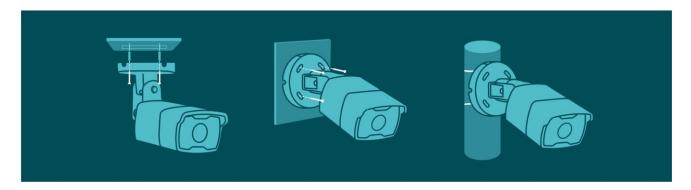

Specifications

Camera	
Product Model	VIGI C330I
ROM	128 MB
RAM	512 MB
Image Sensor	1/2.8" Progressive Scan CMOS
Min. Illumination	Color: 0.1 Lux; 0 Lux with IR
Day & Night	IR Cut Filter
Digital Noise Reduction	3D DNR
WDR	DWDR
Lens	
Focal Length	2.8 mm/4 mm/6 mm
Aperture	2.8mm: F2. 2 4mm: F2.0 6mm: F2.0
FOV	2.8mm: 97.8°/52.9°/117.9° (H/V/D) 4mm: 82.5°/44.9°/99.3° (H/V/D) 6mm: 51.9°/28.7°/60° (H/V/D)
Focus	Fixed
Lens Mount	M12
IR	
IR Range	30m
Wavelength	850nm
Compression Standard	
Video Compression	Main Stream: H.265+/H.265/H.264+/H.264 Sub-Stream: H.265/H.264

Н.264 Туре	Main Profile/High Profile
H.264+	Main Stream Supported
Н.265 Туре	Main Profile
H.265+	Main Stream Supported
Video Bit Rate	64 Kbps to 4 Mbps
Image	
Max. Resolution	3MP (2304 × 1296)
Main Stream	Frame Rate: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps, 30fps Resolution: 2304x1296, 2048x1280, 1920x1080, 1280x720
Sub-Stream	Frame Rate: 1fps, 5fps,10fps, 15fps, 20fps, 25fps,30fps Resolution: 704x576,640x480, 352x288,320x240
Image Settings	Mirror, brightness, contrast, saturation, sharpness, exposure, WDR, white balance, HLC adjustable by client software, Rotation (90°/270°)
Image Enhancement	BLC/3D DNR/HLC/SmartIR
Day/Night Switch	Day/Night/Auto/Schedule
Smart Feature-set	
Smart Event	Intrusion Detection, Line-Crossing Detection, Region Entering Detection, Region Exiting Detection, Object Abandoned Detection, Object Removal Detection, Loitering Detection, Smart Frame, People Detection, Vehicle Detection, Motion Detection, Video Tampering Detection, Exception (Illegal Login), Scene Change Detection
Basic Event	Motion Detection, Video Tampering Detection, Exception (illegal login)
Linkage Method	Trigger Notification: ONVIF, HTTPS
Region of Interest	1 Region
Network	
Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS., DHCP, DNS, RTSP, NTP, UPnP, SSL/TLS, FTP, SFTP, RTP, IPv4, IPv6, ARP
General Function	Two Streams, Mirror, Privacy Masks, Password Reset via E- mail, HTTP Listening

Video encryption, Configuration encryption, Digest Authentication, HTTPS, IP Address Filter, trusted upgrade
Beta
Password Protection, HTTPS Encryption, IP Address Filter, Digest Authentication
3 Main Streams & 3 Sub-Streams
VIGI App, VIGI Security Manager, VIGI NVR, Web
Yes
Yes (Profile S)
1 RJ45 10/100M Self-Adaptive Port
FTP, SFTP
No
N/A
-30–60 °C
12V DC ± 5%, 5.5mm Coaxial Power Plug PoE (802.3af/at, class 0)
12V DC: Max 5W PoE: class 0
IP67
Plastic
174 × 74 × 71 mm
CE/BSMI/VCCI/ONVIF

Specifications are subject to change without notice and can be found at www.tp-link.com.

©2022 TP-Link