

Full-Color

Turret Network Camera

MODEL: VIGI C450(2.8/4mm)



5MP | H.265+

VIGI C450(2.8/4mm)



People & Vehicle
Analytics*



Human & Vehicle
Classification



Smart Detection



True WDR




Active Defense



Two-Way Audio

// People & Vehicle Analytics

Quickly find people or vehicles of interest using various attributes, greatly improve your search efficiency*.



// Human & Vehicle Classification


Intelligently distinguishes humans and vehicles from other objects, so you receive more accurate event notifications.



// Smart Detection



Motion Detection



Region Intrusion



Object Removal Detection



Object Abandoned Detection




Region Exiting Detection



Region Entering Detection



Line-Crossing



Scene Change Detection



Loitering Detection



Camera Tampering

// SmartVid



Smart IR

Keeps objects from being under-rendered when far away or overexposed when close to camera at night.



120dB WDR

Enables crystal-clear images in high contrast scenes.




3D DNR

Removes abnormal pixelation to provide clearer video and eliminate distortion.

// VIGI Surveillance Solution

The VIGI professional surveillance system by TP-Link is dedicated to protecting the business that you've worked hard to build—whenever, wherever.

Outstanding functions, reliable quality guarantees, and simplified installation work together to ensure your business stays safe and sound.

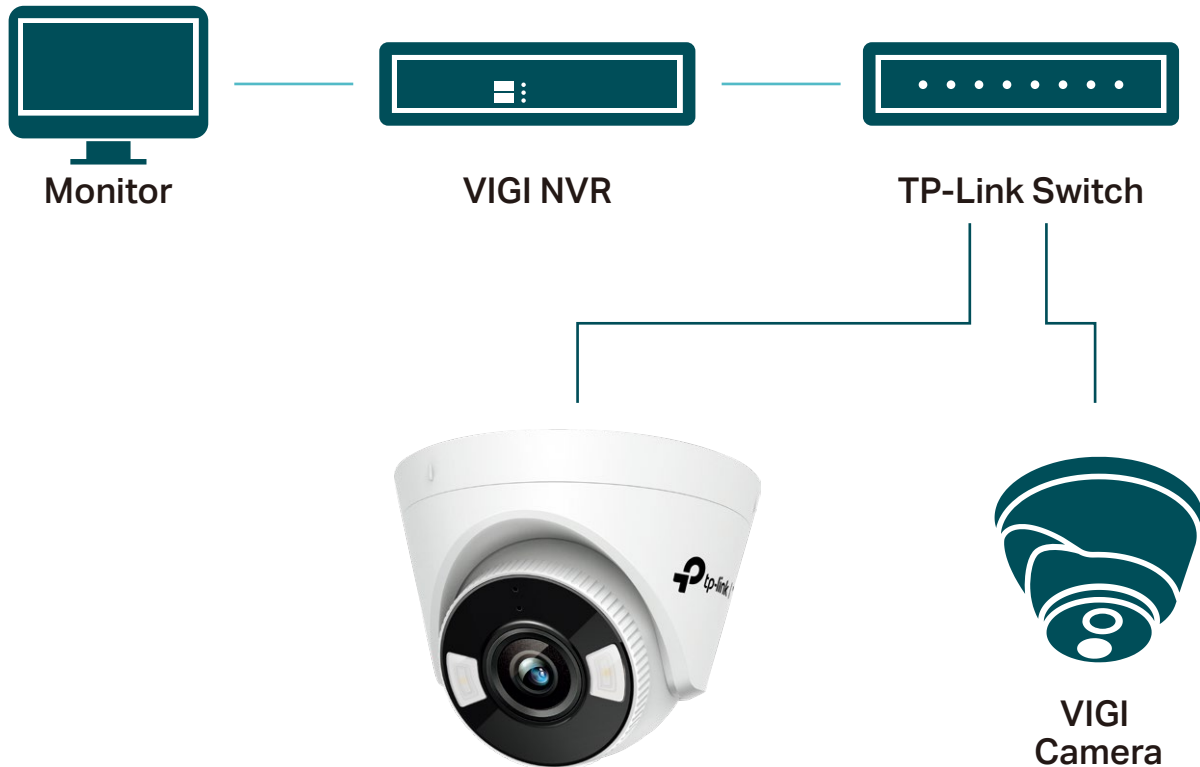

// Flexible Installation

Easily route your camera's cable into a dropped ceiling or avoid drilling by slotting it through the camera's side outlet.



Specifications

Camera					
Product Model	VIGI C450				
ROM	128 MB				
RAM	1G				
Image Sensor	1/2.7" Progressive Scan CMOS				
Shutter Speed	1/3 to 1/10000 s				
Slow Shutter	Yes				
Min. Illumination	0.005 Lux; 0 Lux with IR/white light				
Day & Night	IR Cut Filter				
Day/Night Switch	Day/Night/Auto/Schedule-Switch				
Lens					
Type	Fixed Focal Lens				
Focal Length	2.8 mm/4 mm				
Aperture	2.8 mm: F1.6 4 mm: F1.6				
FOV	2.8mm: Horizontal FOV: 109°, Vertical FOV: 57°, Diagonal FOV: 128° 4mm: Horizontal FOV: 90°, Vertical FOV: 48°, Diagonal FOV: 107°				
Focus	Fixed				
Lens Mount	M12*P 0.5				
DORI Distance	Lens	Detect	Observe	Recognize	Identify
	2.8 mm	64 m (209 ft)	27 m (87 ft)	13 m (42 ft)	6 m (21 ft)
	4 mm	80 m (262 ft)	33 m (109 ft)	16 m (52 ft)	8 m (26 ft)

Angle Adjustment (Manual)	
Range	Pan: 0° to 360°, Tilt: 0° to 85°
Illuminator	
IR LED	Quantity: 2 Range: 30m Wavelength: 850nm
White LED	Quantity: 2 Range: 30m
Illuminator On/Off Control	Auto/Scheduled/Always on/Always off
Video	
Max. Resolution	2880 X 1620
Main Stream	Frame Rate 50Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps 60Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps, 30fps Resolution 2880x1620, 2688x1520, 2304x1296, 2048x1280, 1920x1080, 1280x720 Note: If the image rotation is set to 90° or 270°, the frame rate only supports up to 20fps.
Sub-Stream	Frame Rate: 50Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps 60Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps, 30fps Resolution: 704x576, 640x480, 352x288, 320x240 Note: If the image rotation is set to 90° or 270°, the frame rate only supports up to 20fps.
Bit Rate Control	CBR, VBR
Video Compression	Main Stream: H.265+/H.265/H.264+/H.264 Sub-Stream: H.265/H.264
H.264 Type	Main Profile/High Profile
H.264+	Main Stream Supported
H.265 Type	Main Profile

H.265+	Main Stream Supported
Video Bit Rate	Main Stream: 256 Kbps to 6 Mbps Sub-Stream: 64 Kbps to 512 Kbps
Audio	
Audio Communication	Yes
Audio Input	Yes
Audio Output	Yes
Audio Compression	Yes
Audio Sampling Rate	8KHz
Environment Noise Filtering	Yes
Audio Bit Rate	64 Kbps(G.711 alaw)
Alarm and Event Management	
Smart Event	Human & Vehicle Classification, Intrusion Detection, Line-Crossing Detection, Region Entering Detection, Region Exiting Detection, Object Abandoned Detection, Object Removal Detection, Loitering Detection, Smart Frame, People Detection, Vehicle Detection, Motion Detection, Video Tampering Detection, Exception (Illegal Login), Scene Change Detection
Basic Event	Motion Detection, Video Tampering Detection, Exception (illegal login)
Alarm Linkage	Memory Card Video Recording, Message Push, Audible Warning, White Light Flashing
Linkage Method	N/A
Output Notification	Message Push
Network	
Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS., DHCP, DNS, RTSP, NTP, UPnP, SSL/TLS, FTP, SFTP, RTP, IPv4, IPv6, ARP
Network Storage	NAS (NFS, SMB/ CIFS)
Cyber Security	Video encryption, Configuration encryption, Digest Authentication, HTTPS, IP Address Filter, trusted upgrade

SDK and API	Beta
Web Browser	Google Chrome® 57 and above Firefox® 52 and above Safari® 11 and above Microsoft® Edge 91 and above
Security	Password Protection, HTTPS Encryption, IP Address Filter, Digest Authentication
Simultaneous Live View	3 Main Streams & 3 Sub-Streams
Client	VIGI App, VIGI Security Manager, VIGI NVR, Web
Cloud	Yes
ONVIF	Yes (Profile S)
Interface	
Network Interface	1 RJ45 10/100M Self-Adaptive Ethernet Port
Storage	FTP, SFTP, Built-In Memory Card Slot, Support MicroSD Card up to 256 GB
Built-in Speaker	Yes
Built-in Microphone	Yes; Records Anything Going on within a 15-ft Radius of the Camera
Audio	N/A
Alarm	N/A
Reset Button	Yes
Power	DC Power Port
Deep Learning Function	
Multi-Target-Type Detection	Supports Simultaneous Detection and Capture of Human Body and Vehicle
Face Capture	N/A
Face Comparison	N/A

General		
Operating Temperature	-30–60 °C	
Storage Temperature	-40–60 °C	
Operating Humidity	95% or Less (Non-Condensing)	
Storage Humidity	95% or Less (Non-Condensing)	
Power Supply	12V DC ± 5%, 5.5mm Coaxial Power Plug PoE (802.3af/at, class 0)	
Power Consumption	Maximum	9 W
	Typical (Day Mode)	1.76 W
	Typical (Night Mode with IR LED)	3.5 W
	Typical (Night Mode with White LED)	3.8 W
Material	Plastic	
Product Dimensions (L x W x H)	Φ123 x 84 mm	
Package Contents	VIGI Network Camera Quick Start Guide Mounting Accessories	
Net Weight	0.24 Kg	
Gross Weight	0.4 Kg	
Certifications	CE, NTRA, VCCI, KC, BSMI, FCC, IC	

Specifications are subject to change without notice and can be found at www.tp-link.com.