

PC-LINKED SMART CARD READER

# ACR39U

**COMPACT & STYLISH** 

The ACR39U-U combines present-day technology in the form of the latest compact and stylish smart card reader. It supports **ISO 7816 Class A, B and C smart cards** (5 V, 3 V, 1.8 V), **microprocessor cards** with the T=0 and T=1 protocol as well as a wide variety of memory cards in the market, including the Secure Internet Protocol Router Network (SIPRNET) Card, the Department of Defense Common Access Card (CAC) and the Malaysian Identity Card (MyKad). The ability to support multiple memory cards makes the ACR39U-U ideal for a diverse range of solutions, such as PIV application, physical and logical access control and digital signatures.

Compliant with both PC/SC and CCID, the ACR39U-U can be operated using the plug and play function, ensuring convenience and mobility for its users. It is also designed to be integrated into any computer-based environment as the reader is compatible with various operating systems such as Windows®, Linux®, macOS, Solaris<sup>TM</sup> and Android<sup>TM</sup> (Versions 3.1 and later). EMV<sup>TM</sup> Level 1 (Contact) and People's Bank of China (PBOC) certified, the ACR39U-U is without a doubt, the ideal smart card reader for your e-Banking and e-Payment application needs.

#### **KEY FEATURES**

### ☑ Supports Various Types of Contact Cards

- o ISO 7816 Class A, B and C (5 V, 3 V and 1.8 V)
- Microprocessor Card (T=0, T=1)
- Memory Card
- o Mykad Card
- CAC, J-LIS, SIPRNET Smart Cards

#### **Keliable**

- o Certified for International Regulations
  - EN 62368/IEC 623868, UL 62368, CE, UKCA, FCC, RoHS, REACH, VCCI, USB 2.0 Full Speed, Microsoft® WHQL
- o Mean Time Between Failures (MTBF) up to 500k Hours
- o Card Insertion Cycles: 200k Times
- o Short Circuit Protection

#### Compatible

Windows®, Linux®, macOS, Solaris™ and Android™ (Version 3.1 and later)



## COMMON <u>APPLICATIONS</u>

- e-Government
- e-Banking and e-Payment
- e-Healthcare

Public Key Infrastructure

**Network Security** 

Access Control


Loyalty Program

#### **TECHNICAL SPECIFICATIONS**

Contact Smart Card Interface		
Number of Slot(s)	1 Full-Sized Card Slot	
Supported Card Types	ISO 7816 Parts 1-4, Class A, B, C (5 V, 3 V, 1.8 V), Microprocessor Card (T=0, T=1), Memory Card, MyKad Card, CAC, J-LIS, SIPRNET Card	
Supply Current	Max. 50 mA	
Read/Write Speed	9.6 <b>–</b> 600 Kbps	
Clock Frequency	4.80 MHz; Operates Up to 16MHz	
Card Connector	6pin Contact	
Card Insertion Cycles	Min. 200,000 Min. 300,000 (For Landing Connector)	
PPS (Protocol and Parameters Selection)	Supported	
Short Circuit Protection	Supported	
Host Interface		
Protocol	USB CCID	
Connector Type	Contact Landing (Optional)	
Power Source	From USB Port	
USB Interface	USB 2.0 Full Speed (12Mbps) Compatible with USB 3.0	
Supply Voltage	5 V	
Cable Length	1.5 m (Fixed)	
Application Programming Interface		
PC-Linked Mode	PC/SC	
Model/Part Number		
USB Type-A	ACR39U-U1	
USB Type-C	ACR39U-UF	

Physical Characteristics         Dimensions       72.2mm (L) × 69.0mm (W) × 14.5mm (H)         Weight       Type-A: 65 g ± 6.5 g Type-C: 56 g ± 5.6 g         Available Colour(s)       Black (Matte)         Peripherals       LED         LED       Green         Operating Conditions       Temperature         Temperature       0 - 60°C         Humidity       Max. 90% (Non-Condensing)         MTBF       500,000 Hours         Certifications & Compliances       UL 62368, CE, UKCA, FCC, RoHS, REACH, VCCI, Microsoft® WHQL, EN 62368/IEC62368, EMV™ Level 1 (Contact), BIS, J-LIS, KCC, PBOC, TAA(USA), UL, ISO 7816, USB 2.0 Full Speed         Compliances       USB CCID, PC/SC         Driver & Support       Windows® 8.1, Windows® 10, Windows® 8.1, Windows® 10, Windows® 11, Windows® Server 2008, Windows® Server 2008, Windows® Server 2012, Windows® Server 2016. Linux®, macOS, Solaris™M, Android™ 3.1 and later         Plug and Play       Supported			
Dimensions  72.2mm (L) × 69.0mm (W) × 14.5mm (H)  Weight  Type-A: 65 g ± 6.5 g Type-C: 56 g ± 5.6 g  Available Colour(s)  Black (Matte)  Peripherals  LED  Green  Operating Conditions  Temperature  0 - 60°C  Humidity  Max. 90% (Non-Condensing)  MTBF  500,000 Hours  Certifications & Compliances  UL 62368, CE, UKCA, FCC, RoHS, REACH, VCCI, Microsoft® WHQL, EN 62368/IEC62368, EMV™ Level 1 (Contact), BIS, J-LIS, KCC, PBOC, TAA(USA), UL, ISO 7816, USB 2.0 Full Speed  Compliances  USB CCID, PC/SC  Driver & Support  Windows® 7, Windows® 8, Windows® 8.1, Windows® 10, Windows® 11, Windows® 10, Windows® 11, Windows® Server 2003, Windows® Server 2008, Windows® Server 2012, Windows® Server 2012 R2, Windows® Server 2016. Linux®, macOS, Solaris™, Android™ 3.1 and later	Physical Characteristic	\$	
Available Colour(s)  Peripherals  LED  Green  Operating Conditions  Temperature  0 - 60°C  Humidity  Max. 90% (Non-Condensing)  MTBF  500,000 Hours  Certifications & Compliances  UL 62368, CE, UKCA, FCC, RoHS, REACH, VCCI, Microsoft® WHQL, EN 62368/IEC62368, EMV™ Level 1 (Contact), BIS, J-LIS, KCC, PBOC, TAA(USA), UL, ISO 7816, USB 2.0 Full Speed  Compliances  USB CCID, PC/SC  Driver & Support  Windows® 7, Windows® 8, Windows® 11, Windows® 10, Windows® 11, Windows® Server 2003, Windows® Server 2008, Windows® Server 2008 R2, Windows® Server 2012 R2, Windows® Server 2016. Linux®, macOS, Solaris™, Android™ 3.1 and later		72.2mm (L) × 69.0mm (W) ×	
Peripherals  LED Green  Operating Conditions  Temperature 0 - 60°C  Humidity Max. 90% (Non-Condensing)  MTBF 500,000 Hours  Certifications & Compliances  UL 62368, CE, UKCA, FCC, RoHS, REACH, VCCI, Microsoft® WHQL, EN 62368/IEC62368, EMV™ Level 1 (Contact), BIS, J-LIS, KCC, PBOC, TAA(USA), UL, ISO 7816, USB 2.0 Full Speed  Compliances USB CCID, PC/SC  Driver & Support  Windows® 7, Windows® 8, Windows® 8.1, Windows® 10, Windows® 11, Windows® Server 2008, Windows® Server 2008, Windows® Server 2012, Windows® Server 2012, Windows® Server 2016. Linux®, macOS, Solaris™, Android™ 3.1 and later	Weight		
LED Green  Operating Conditions  Temperature 0 - 60°C  Humidity Max. 90% (Non-Condensing)  MTBF 500,000 Hours  Certifications & Compliances  UL 62368, CE, UKCA, FCC, RoHS, REACH, VCCI, Microsoft® WHQL, EN 62368/IEC62368, EMV™ Level 1 (Contact), BIS, J-LIS, KCC, PBOC, TAA(USA), UL, ISO 7816, USB 2.0 Full Speed  Compliances USB CCID, PC/SC  Driver & Support  Windows® 7, Windows® 8, Windows® 8.1, Windows® 10, Windows® 11, Windows® Server 2008, Windows® Server 2008, Windows® Server 2012, Windows® Server 2012 R2, Windows® Server 2016. Linux®, macOS, Solaris™, Android™ 3.1 and later	Available Colour(s)	Black (Matte)	
Operating Conditions         Temperature       0 - 60°C         Humidity       Max. 90% (Non-Condensing)         MTBF       500,000 Hours         Certifications & Compliances       UL 62368, CE, UKCA, FCC, RoHS, REACH, VCCI, Microsoft® WHQL, EN 62368/IEC62368, EMV™ Level 1 (Contact), BIS, J-LIS, KCC, PBOC, TAA(USA), UL, ISO 7816, USB 2.0 Full Speed         Compliances       USB CCID, PC/SC         Driver & Support       Windows® 7, Windows® 8, Windows® 10, Windows® 81, Windows® 10, Windows® 11, Windows® Server 2008, Windows® Server 2008, Windows® Server 2012, Windows® Server 2012, Windows® Server 2012, Windows® Server 2012, R2, Windows® Server 2016. Linux®, macOS, Solaris™, Android™ 3.1 and later	Peripherals		
Temperature 0 - 60°C  Humidity Max. 90% (Non-Condensing)  MTBF 500,000 Hours  Certifications & Compliances  UL 62368, CE, UKCA, FCC, RoHS, REACH, VCCI, Microsoft® WHQL, EN 62368/IEC62368, EMV™ Level 1 (Contact), BIS, J-LIS, KCC, PBOC, TAA(USA), UL, ISO 7816, USB 2.0 Full Speed  Compliances USB CCID, PC/SC  Driver & Support  Windows® 7, Windows® 8, Windows® 8.1, Windows® 10, Windows® 11, Windows® Server 2008, Windows® Server 2008, Windows® Server 2012, Windows® Server 2012, Windows® Server 2016. Linux®, macOS, Solaris™, Android™ 3.1 and later		Green	
Humidity  Max. 90% (Non-Condensing)  MTBF  500,000 Hours  Certifications & Compliances  UL 62368, CE, UKCA, FCC, RoHS, REACH, VCCI, Microsoft® WHQL, EN 62368/IEC62368, EMV™ Level 1 (Contact), BIS, J-LIS, KCC, PBOC, TAA(USA), UL, ISO 7816, USB 2.0 Full Speed  Compliances  USB CCID, PC/SC  Driver & Support  Windows® 7, Windows® 8, Windows® 8.1, Windows® 10, Windows® 11, Windows® Server 2003, Windows® Server 2008, Windows® Server 2012, Windows® Server 2012 R2, Windows® Server 2016. Linux®, macOS, Solaris™, Android™ 3.1 and later	Operating Conditions		
MTBF  Certifications & Compliances  UL 62368, CE, UKCA, FCC, RoHS, REACH, VCCI, Microsoft® WHQL, EN 62368/IEC62368, EMV™ Level 1 (Contact), BIS, J-LIS, KCC, PBOC, TAA(USA), UL, ISO 7816, USB 2.0 Full Speed  Compliances  USB CCID, PC/SC  Driver & Support  Windows® 7, Windows® 8, Windows® 8.1, Windows® 10, Windows® 11, Windows® Server 2003, Windows® Server 2008, Windows® Server 2012, Windows® Server 2012 R2, Windows® Server 2016. Linux®, macOS, Solaris™, Android™ 3.1 and later	Temperature	0 - 60°C	
Certifications & Compliances  UL 62368, CE, UKCA, FCC, RoHS, REACH, VCCI, Microsoft® WHQL, EN 62368/IEC62368, EMV™ Level 1 (Contact), BIS, J-LIS, KCC, PBOC, TAA(USA), UL, ISO 7816, USB 2.0 Full Speed  Compliances USB CCID, PC/SC  Driver & Support  Windows® 7, Windows® 8, Windows® 8.1, Windows® 10, Windows® 11, Windows® Server 2003, Windows® Server 2008, Windows® Server 2012, Windows® Server 2012, Windows® Server 2012 R2, Windows® Server 2016. Linux®, macOS, Solaris™, Android™ 3.1 and later	Humidity	Max. 90% (Non-Condensing)	
UL 62368, CE, UKCA, FCC, RoHS, REACH, VCCI, Microsoft® WHQL, EN 62368/IEC62368, EMV <sup>™</sup> Level 1 (Contact), BIS, J-LIS, KCC, PBOC, TAA(USA), UL, ISO 7816, USB 2.0 Full Speed  Compliances USB CCID, PC/SC  Driver & Support  Windows® 7, Windows® 8, Windows® 8.1, Windows® 10, Windows® 11, Windows® Server 2003, Windows® Server 2008, Windows® Server 2008 R2, Windows® Server 2012, Windows® Server 2012 R2, Windows® Server 2016. Linux®, macOS, Solaris™, Android™ 3.1 and later	MTBF	500,000 Hours	
RoHS, REACH, VCCI, Microsoft® WHQL, EN 62368/IEC62368, EMV <sup>TM</sup> Level 1 (Contact), BIS, J-LIS, KCC, PBOC, TAA(USA), UL, ISO 7816, USB 2.0 Full Speed  Compliances USB CCID, PC/SC  Driver & Support  Windows® 7, Windows® 8, Windows® 8.1, Windows® 10, Windows® 11, Windows® Server 2003, Windows® Server 2008, Windows® Server 2008 R2, Windows® Server 2012, Windows® Server 2012 R2, Windows® Server 2016. Linux®, macOS, Solaris™, Android™ 3.1 and later	Certifications & Compliances		
Driver & Support  Windows® 7, Windows® 8, Windows® 8.1, Windows® 10, Windows® 11, Windows® Server 2003, Windows® Server 2008, Windows® Server 2008 R2, Windows® Server 2012, Windows® Server 2012 R2, Windows® Server 2016. Linux®, macOS, Solaris™, Android™ 3.1 and later	Certifications	RoHS, REACH, VCCI, Microsoft® WHQL, EN 62368/IEC62368, EMV <sup>TM</sup> Level 1 (Contact), BIS, J-LIS, KCC, PBOC, TAA(USA), UL, ISO 7816, USB 2.0 Full Speed	
Windows® 7, Windows® 8, Windows® 8.1, Windows® 10, Windows® 11, Windows® Server 2003, Windows® Server 2008, Windows® Server 2018 R2, Windows® Server 2012, Windows® Server 2012 R2, Windows® Server 2016. Linux®, macOS, Solaris™, Android™ 3.1 and later	Compliances	USB CCID, PC/SC	
Windows® 8.1, Windows® 10, Windows® 11, Windows® Server 2003, Windows® Server 2008, Windows® Server 2018, Windows® Server 2012, Windows® Server 2012 R2, Windows® Server 2016. Linux®, macOS, Solaris™, Android™ 3.1 and later	Driver & Support		
Plug and Play Supported	Driver Supported OS	Windows® 8.1, Windows® 10, Windows® 11, Windows® Server 2003, Windows® Server 2008, Windows® Server 2012, Windows® Server 2012 R2, Windows® Server 2016. Linux®, macOS, Solaris™,	
	Plug and Play	Supported	

#### **MECHANICAL SPECIFICATIONS**

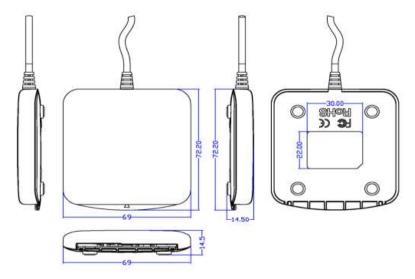

#### **About ACS**

Advanced Card Systems Ltd. (ACS), founded in 1995, is Asia Pacific's top supplier and one of the world's top 3 suppliers of PC-linked smart card readers. ACS is the winner of the Product Quality Leadership Award for Smart Card Readers from Frost & Sullivan. In 2010, 2014 and 2015, ACS was listed in Forbes Asia's "Best Under a Billion" list, an inter-industry list comprised of 200 top-performing publicly listed companies in the Asia-Pacific, with sales between US\$5 million and US\$1 billion. ACS develops a wide range of high-quality smart card reading/writing devices, smart cards and related products and distributes them to over 100 countries worldwide.



Computer Peripheral and Supplies Ltd.

#### Computer Peripheral and Supplies Ltd.

244 Soi Pattanakarn 53, Pattanakarn, Suanluang, Bangkok 10250 Thailand

#### Contact Us

Tel: (66) 0-2322-9535, 0-2722-4040

Fax: (66) 0-2322-7990 E-Mail: sales.dept@cps.co.th

Web site: www.cps.co.th, www.facebook.com/cps.co.th

#### More Details

Scan Here
LINE ID
Need more
Information

