



LA3218 Product Show



Two-channel




Single channel

Functions & Features

- 1、 Reasonable and reliable design, low noise, smooth operation and long service life;
- 2、 With function of opening doors automatically under power-off state to meet the need of fire-fighting passage;
- 3、 With functions of anti-tail, anti-reverse pass and so on;
- 4、 Card can be set "with memory" or "without memory" functions;
- 5、 With automatic reset function, i.e. after having access to the gate, the gate automatically restores to the locked state if not pass within the time set;
- 6、 With infrared anti-clip function (anti-clip when gate is open or running);
- 7、 Compatible with IC, ID card, scanning and face recognition,etc.
- 8、 Two modes of operation are available: open or closed.
- 9、 Various working modes are available, including two-way card reading and one-way card reading,etc.


Size drawing

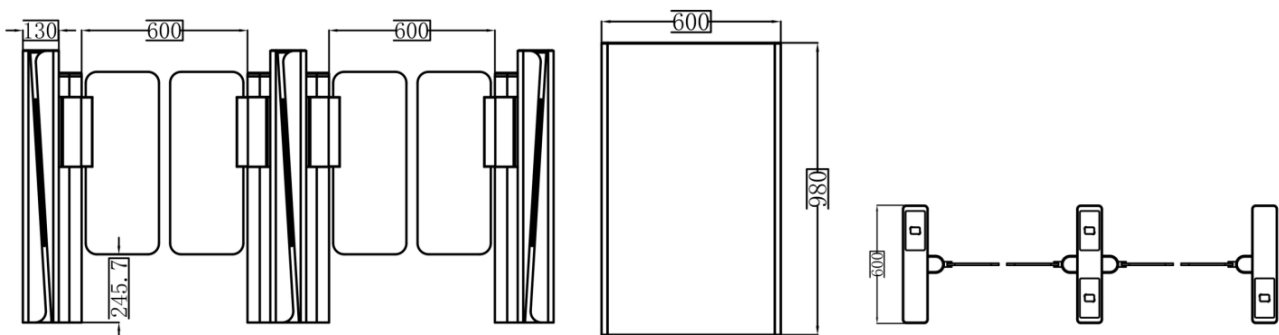

Parame-

Size (L*W*H)	600*130*980mm
Material	Aluminum with anodized finish Top Lid :8.0mm thickness Body:3.0mm thickness
Arm Material	8mm clear acrylic
Pass width	600mm
Height From Ground (upper part)	900mm
Height From Ground (lower part)	245mm
Mechanism	standard speed gate mechanism
Power supply	24V 500W
Input voltage	AC100V~240V,50/60HZ
Drive Unit	Brushless servo motor40:1 100W
Pass rate	35-50 persons/minute
Open Speed	0.5s/1.5s
Infrared Sensor	6 pairs
Clutch size	80mm outer diameter
LED Indicator	Dynamic indicator light+RGB light
Communication mode	RS485
Control	Main borad
Noise	≤65dB
Temperature	-20°C~+70°C
Humidity	≤90% No condensation
IP	IP4X
Environment	Indoor and outdoor (outdoor with canopy)

Case share

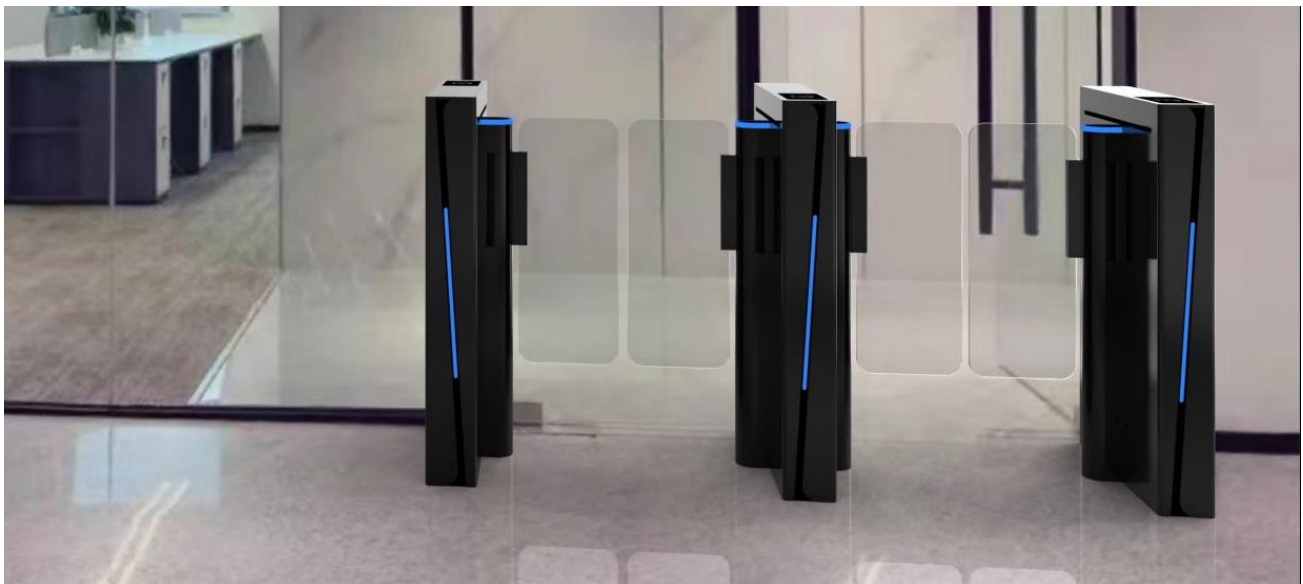

CDG | Computer Peripheral and Supplies Ltd.

Computer Peripheral and Supplies Ltd.
244 Soi Pattanakarn 53, Pattanakarn, Suanluang,
Bangkok 10250 Thailand

Contact Us

Tel : (66) 0-2322-9535, 0-2722-4040
Fax : (66) 0-2322-7990
E-Mail : sales.dept@cps.co.th
Web site : www.cps.co.th, www.facebook.com/cps.co.th

More Details

Scan Here
LINE ID
Need more
Information

