




## EF2213 Product Show



two-channel

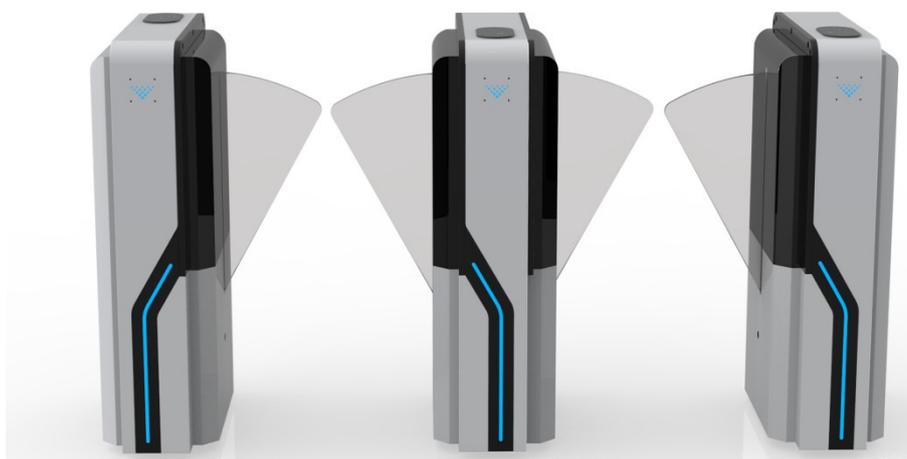


Single channel



## Functions & Features

- 1、 Reasonable and reliable design, low noise, smooth operation and long service life;
- 2、 With functions of anti-tail, anti-reverse pass and so on;
- 3、 Card can be set "with memory" or "without memory" functions;
- 4、 With automatic reset function, i.e. after having access to the gate, the gate automatically restores to the locked state if not pass within the time set;
- 5、 With infrared anti-clip function (anti-clip when gate is open or running);
- 6、 Compatible with IC, ID card, scanning and face recognition,etc.
- 7、 Two modes of operation are available: open or closed.
- 8、 Various working modes are available, including two-way card reading and one-way card reading,etc.

## Product Size

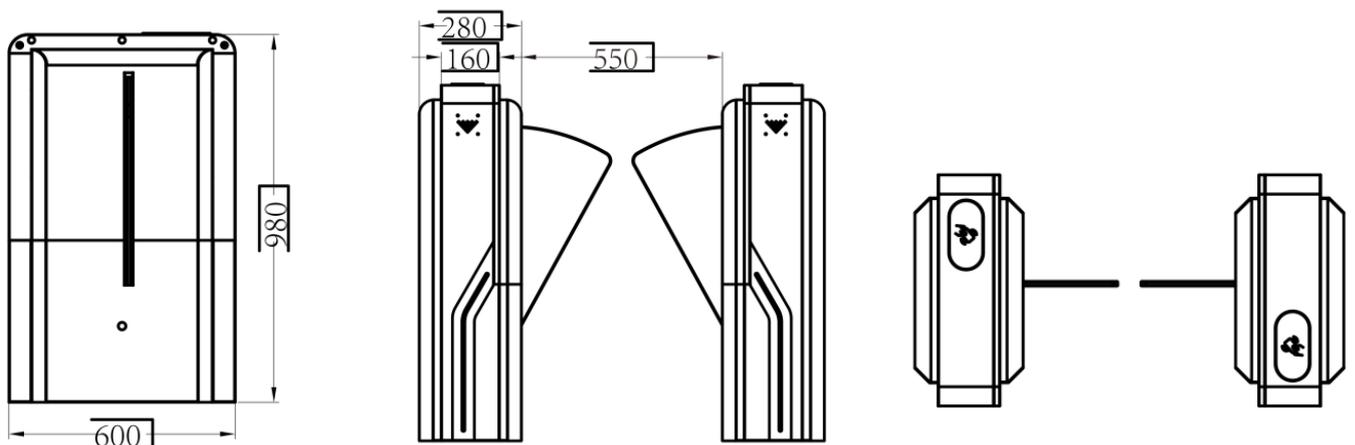

## Parame-

<b>Size (L*W*H)</b>	600*280*980mm
<b>Pass width</b>	550mm
<b>Power</b>	50W
<b>Material</b>	Cold roller with power coated 1.5mm
<b>Bar Material</b>	Clean Acrylic+RGB light
<b>Movement</b>	Brushless movement of Flap Barrier Gate
<b>Sensor</b>	6 pairs
<b>Indicator Light</b>	RGB light
<b>Drive Unit</b>	30K 40W
<b>Power Supply</b>	24V 150W
<b>Control Unit</b>	Brushless control system
<b>Communication Interface</b>	Dry contact & RS485
<b>Pass rate</b>	35-50 persons/minute
<b>Temperature</b>	-20°C~+70°C
<b>Humidity</b>	≤90% No condensation
<b>IP</b>	IP4X
<b>Environment</b>	Indoor



## Case share

