

DS-D6043UL-B/S Standing Digital Signage



- Metallic Appearance Light weight body with integrative design. The front high-transmittance tempered glass provides reliable protection.
- Exquisite Image Industrial A+ interface, auto-coloring and image-enhancing engine.
- Variable Materials Static and dynamic materials, including pictures, audio, video, scrolling subtitle, PDF, webpage, live video, number calling, pop-up pictures, etc.
- Flexible Program Schedule. Free schedule and district display of multiple materials. Multiple play modes with customization support.
- Centralized Management. Remotely control and manage one or more screens, such as timed startup/shutdown, quick startup/shutdown, brightness/volume timed adjustment, and screenshot preview. Remote program release and local (USB) program update.
- Organization Permission. 5-level organization available for managing materials, programs, terminals, and users. Create custom user with precise permission assignment. Multiple permission templates available.
- Multiple Security Safeguards. 3-level check of materials, programs, and schedules to prevent mistake release. Screensaver password to protect displaying. Encryption of data storage and transmission to avoid data tampering. With no default password, users can activate and set initial password to guarantee the password safety.

Contact Us

More Details





**ภาพจำลองเพื่อวัตถุประสงค์ในการนำเสนอเท่านั้น

Specification

	Model	DS-D6043UL-B/S	DS-D6055UL-B/S
Display	Viewing Angle	178°(H) / 178°(V)	178° (H)/178° (V)
	Screen Size	42.5 inch	54.6 inch
	Active Display Area	941.184 (H) mm x 529.416 (V) mm	1209.6 (H) × 680.4 (V) mm
	Backlight	D-LED	D-LED
	Pixel Pitch	0.2451(H) mm x 0.2451 (V) mm	0.315 (H) × 0.315 (V)mm
	Resolution	3840 × 2160	3840 × 2160
	Brightness	500 cd/m ²	500 cd/m ²
	Color Depth	8 bit + FRC	10 bit, (8 bit + FRC)
	Contrast Ratio	5000:1	5000:1
	Response Time	6.5 ms	6.5 ms
	Color Gamut	72% NTSC	72% NTSC
	Refresh Rate	60 Hz	60 Hz
Built-in System	Operation System	Android 8.1.0	Android 8.1.0
	CPU	Cortex-A17, 4-core, main frequency 1.6 GHz	Cortex-A17, 4-core, 1.6 GHz
	Memory	2 GB	2 GB
	Storage	16 GB EMMC	16 GB EMMC
Interface	Video & Audio Input	AUDIO IN × 1, HDMI IN × 2, VGA IN × 1	AUDIO IN × 1, HDMI IN × 2, VGA IN × 1
	Video & Audio Output	AUDIO OUT × 1	AUDIO OUT × 1
	Network Interface	LAN × 1, Wi-Fi	LAN × 1, Wi-Fi
	Data Transmission Interface	USB 2.0 × 2, BT 4.2 × 1, TF card × 1	USB 2.0 × 2, BT 4.2 × 1, TF card × 1
General	Loudspeaker	2 × built-in speaker, 8 Ω 5 W	2 × built-in speaker, 8 Ω 5 W
	Product Dimensions (W × H × D)	585.14 x 1767.29 x 450 mm	738 x 1962.7 x 450 mm
	Power Supply	100 to 240 VAC, 50/60 Hz	100 to 240 VAC, 50/60 Hz
	Power Consumption	≤ 150 W	≤ 150 W
	Working humidity	10% to 80% RH	0% to 90% (no condensation)
	Standby Consumption	< 0.5 W	< 0.5 W
	Working temperature	0 °C to 40 °C (32 °F to 104 °F)	0 °C to 40 °C (32 °F to 104 °F)
	Material Type	DAT, MPG, VOB, TS, AVI, MKV, MP4, MOV, 3GP, TS, FLV, WEBM, ASF, MP1, MP2, MP3, WMA, WAV, OGG, OGA, FLAC, ACC, M4A, XMF, MXMF, RTTTL, RTX, OTA, IMY, JPG, JPEG, BMP, GIF, PNG	
	Packing List	Screen, Base, Key, Screw Kit, Installation Manual	
	Net Weight	48.46 kg	66.190 kg


▪ Specification

Model	DS-D6043UL-B/S	
Display	Viewing Angle	178° (H) /178° (V)
	Contrast Ratio	5000:1
	Screen Size	42.5 inch
	Active Display Area	941.184 (H) mm x 529.416 (V) mm
	Backlight	D-LED
	Pixel Pitch	0.2451(H) mm x 0.2451 (V) mm
	Resolution	3840 × 2160
	Brightness	500 cd/m ²
	Color Depth	8 bit + FRC
	Response Time	6.5 ms
	Color Gamut	72% NTSC
	Reliability	7 × 24 H
	Refresh Rate	60 Hz
Built-in System	Operation System	Android 8.1.0
	Processor	Cortex-A17, 4-core, main frequency 1.6 GHz
	Memory	2 GB
	Built-in Storage	16 GB EMMC
Interface	Video & Audio Input	AUDIO IN × 1, HDMI IN × 2, VGA IN × 1
	Video & Audio Output	AUDIO OUT × 1
	Network Interface	LAN × 1, Wi-Fi
	Data Transmission Interface	USB 2.0 × 2, BT 4.2 × 1, TF card × 1
Internal Function	Loudspeaker	2 × built-in speaker, 8 Ω 5 W
Working Environment	Storage Temperature	10% to 80%
	Storage Humidity	5% to 90% RH
General	Material Type	DAT, MPG, VOB, TS, AVI, MKV, MP4, MOV, 3GP, TS, FLV, WEBM, ASF, MP1, MP2, MP3, WMA, WAV, OGG, OGA, FLAC, ACC, M4A, XMF, MXMF, RTTTL, RTX, OTA, IMY, JPG, JPEG, BMP, GIF, PNG
	Power Supply	100 to 240 VAC, 50/60 Hz
	Power Consumption	≤ 150 W
	Standby Consumption	< 0.5 W
	Working temperature	0 °C to 40 °C (32 °F to 104 °F)
	Working humidity	10% to 80% RH
	Product Dimensions (W × H × D)	Without base: 585.14 mm × 1705.79 mm × 55 mm (23.05" × 67.21" × 2.17") With base: 585.14 mm × 1767.29 mm × 450 mm (23.05" × 69.63" × 17.73")
	Package Dimensions (W × H × D)	1935 mm× 765 mm × 303 mm (76.18" × 30.12" × 11.93")
	Net weight	48.46 kg (106.84 lb.)
	Gross weight	63.46 kg (139.91 lb.)
Packing List	Screen, Base, Key, Screw Kit, Installation Manual	

▪ **Available Model**

DS-D6043UL-B/S

▪ **Dimension**

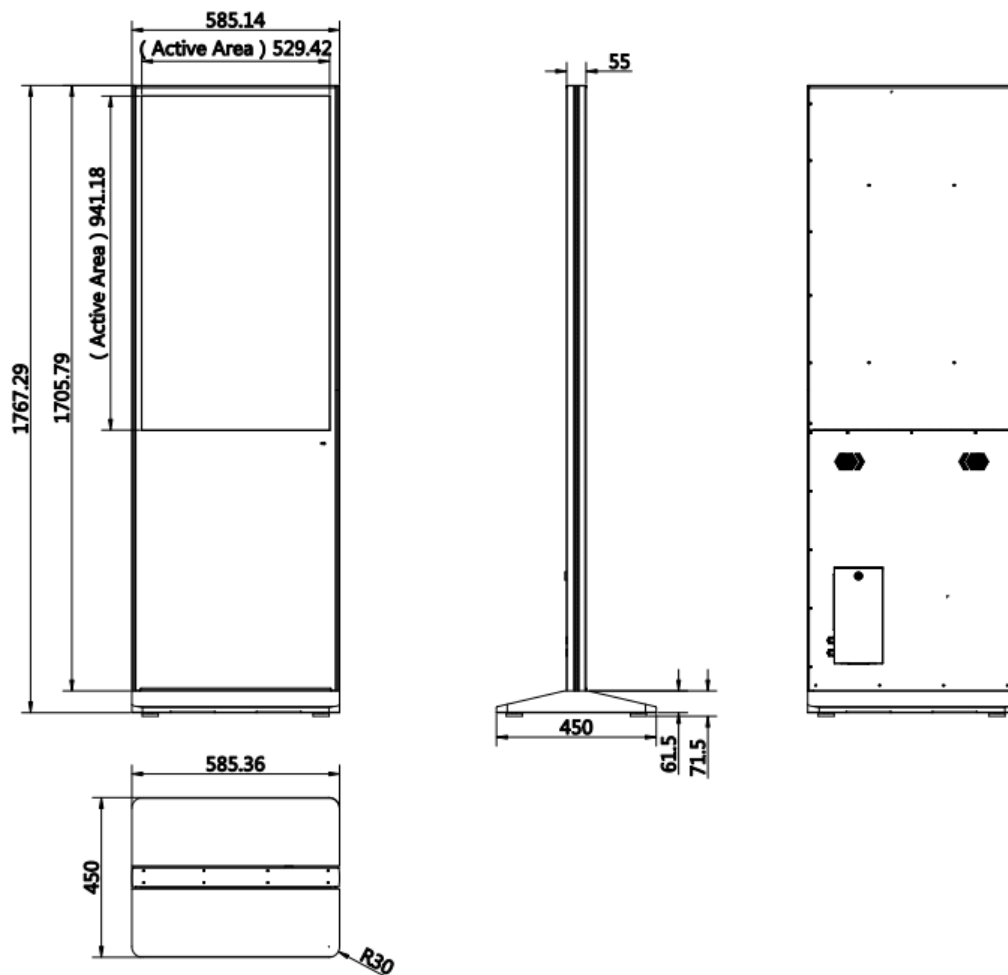

Unit: mm

