

POSIFLEX

Connect. Integrate. Flexible.



XT-3915IR-G2

IR Touch Fanless POS Terminal

XT-3817-G2

Fanless POS Terminal

CDG | Computer Peripheral
and Supplies Ltd.

Computer Peripheral and Supplies Ltd.
244 Soi Pattanakarn 53, Pattanakarn, Suanluang,
Bangkok 10250 Thailand

Contact Us


 : facebook.com/cps.co.th
 : Tel. 02-7224040 Ext.9
 : sales.dept@cps.co.th
 : www.cps.co.th





Patented Fanless Technology

Solve the fan maintenance issue and provide silent mode operation, which is ideally suited for high-end boutique stores or hospital environments.

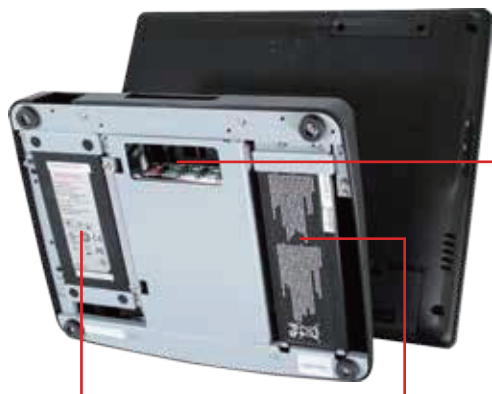

Power Adaptor

UPS Battery



PoweredUSB Ports

GEN8E Base (U.S. Patent 9004436)

Optional GEN8E base integrates internal power adaptor and PoweredUSB port into the base stand, which keeps counters clutter-free.

XT-3915IR-G2



In today's retail and hospitality markets, POS terminal is no longer just a cold and hard business tool. It is a part of the store decoration, a part of the store image. Each curve and detail of the POS terminal should add something to the overall mood of the store, to lift the shopping experience of customers.

The XT-3915IR-G2 features a 15" IR touch screen, beautifully sculptured slim body, and sexily curved base stand, the XT-3915IR-G2 looks right at home at any elegantly decorated store. More than just good looks, the XT-3915IR-G2 offers ample of performance and flexibility to satisfy the most demanding daily POS operations.

Sleek Look

The XT-3915IR-G2 comes from new Posiflex design language. Slimmer than ever, it is a sharp departure from the traditionally conservative Posiflex terminal design. Every curve and detail of the XT-3915IR-G2 is carefully thought out to make itself one of the most visually desirable terminals in the market.

Performance

Equipped with a quad core Intel Bay Trail processor, the XT-3915IR-G2 delivers incomparable performance and is powerful enough to process anything throws at it without even breaking a sweat.

Multi-Position Folding Base (U.S. Patent 9004436)

The XT-3915IR-G2 provides the selection of two foldable bases, the curvy slim GEN7E base and the larger but practical GEN8E base. The foldable base can be configured into "Flat Folded Mode" to save the shipping package volume, "Low Profile Mode" to allow greater interaction between the cashier and the customer, and the traditional "Full Extended Mode". All this can be achieved with a simple pull of the hidden lever.



Full Extended Mode



Low Profile Mode



Flat Folded Mode

XT-3915IR-G2

Specification	XT-3915IR-G2
Processor	Intel Elkhart Lake Celeron J6412, up to 2.60 GHz, 1.5M Cache
System Memory	DDR4 SO-DIMM x 2, max. 32GB
Storage Device	M.2 connector [supporting AHCI mode] x 2
RAID Function	N/A
Intel vPro Support	N/A
TPM Support	Yes, TPM 2.0
Power Supply	12V/60W
OS Support	Windows 10 IoT LTSC / Windows 11 IoT LTSC

Display & Touch

LCD	15" TFT LCD
Resolution	1024 x 768
Touch	IR touch

I/O & Expansion

Serial Port	6, DB9 x 3 + RJ50 x 1 + 2 via optional converter cable from service window, 5V support on all COM ports, 12V support on COM1 to COM 4 [all converter cables are optional]
Parallel Port	1, via optional conversion cable through service window
Standard USB Port	7, USB 3.0 x 3 + USB 2.0 x 4
PoweredUSB Port	Optional 24V x 1 + 12V x 3 via GENBE base
LAN Port	10/100/1000 Mb x 1
Display Port	VGA x 1, 12V support for Posiflex monitors
CR Port	1, control 2 CR via optional Y-cable, supporting 12V cash drawer
PS/2 Port	1, via optional conversion cable through service window
UPS Port	Yes, battery optional
Audio	Internal 2W speaker x 1
Expansion Slot	M.2 slot x 1

Physical Dimension

Dimensions (W x D x H in mm)	372 x 252.7 x 320
Weight (N. W. in kg)	6

Environmental

Operating Condition	0°C - 40°C, 20%RH - 90%RH
Storage Condition	-20°C - 70°C, 10%RH - 90%RH

Built-in Options

WiFi	M.2 WiFi/BT module
------	--------------------

Attachment Options

POS Monitor	Non-touch TFT LCD: 7"/9.7"/12.1"/14"/15"; PCAP touch TFT LCD: 9.7"/14"/15"; Resistive touch TFT LCD: 15"
Line Display	2 x 20 rear-mount VFD/LCD customer line display; 7" color LCD graphical customer line display
Attachment	MSR; iButton; Rotatable 2D Scanner; RFID; Fingerprint Sensor; Keypad

* Designed and Manufactured in Taiwan by Posiflex Technology, Inc.

* The product information and specifications are subject to change without prior notice.

* Please refer to the website for more attachment options.

POSIFLEX

Authorized Distributor / Reseller

Certifications	      	EN20231024V6
----------------	--	--------------

CDG | Computer Peripheral and Supplies Ltd.

Computer Peripheral and Supplies Ltd.

244 Soi Pattanakam 53, Pattanakam, Suanluang, Bangkok 10250 Thailand

 : facebook.com/cps.co.th
 : Tel. 02-7224040 Ext.9
 : sales.dept@cps.co.th
 : www.cps.co.th

    CPS

Other

 : Tel : (66) 0-2322-9535
 : Fax : (66) 0-2322-7990

 scan here contact us
Need more information 

XT-3817-G2



In today's retail and hospitality markets, POS terminal is no longer just a cold and hard business tool. It is a part of the store decoration, a part of the store image. Each curve and detail of the POS terminal should add something to the overall mood of the store, to lift the shopping experience of customers.

The XT-3817-G2 features a large 17" true-flat PCAP touch screen, beautifully sculptured slim body, and sexily curved base stand, it looks right at home at any elegantly decorated store. More than just good looks, the XT-3817-G2 offers ample of performance and flexibility to satisfy the most demanding daily POS operations.

Sleek Look

The XT-3817-G2 comes from new Posiflex design language. Slimmer than ever, it is a sharp departure from the traditionally conservative Posiflex terminal design. Every curve and detail of the XT-3817-G2 is carefully thought out to make itself one of the most visually desirable terminals in the market.

Performance

Equipped with a quad core Intel Elkhart Lake processor, the XT-3817-G2 delivers incomparable performance and is powerful enough to process anything throws at it without even breaking a sweat.

Multi-Position Folding Base (U.S. Patent 9004436)

The XT-3817-G2 provides the selection of two foldable bases, the curvy slim GEN7E base and the larger but practical GEN8E base. The foldable base can be configured into "Flat Folded Mode" to save the shipping package volume, "Low Profile Mode" to allow greater interaction between the cashier and the customer, and the traditional "Full Extended Mode". All this can be achieved with a simple pull of the hidden lever.



Full Extended Mode



Low Profile Mode



Flat Folded Mode

XT-3817-G2

Specification	XT-3817-G2
Processor	Intel Elkhart Lake Celeron J6412, up to 2.60 GHz, 1.5M Cache
System Memory	DDR4 SO-DIMM x 2, max. 32 GB
Storage Device	M.2 connector [Support AHCI] x 2
RAID Function	N/A
Intel vPro Support	N/A
TPM Support	Yes, TPM 2.0
Power Supply	12V/84W [default]; 12/150W with optional PoweredUSB
OS Support	Windows 10 IoT LTSC / Windows 11 IoT LTSC

Display & Touch

LCD	17" TFT LCD with LED backlight
Resolution	1280 x 1024
Touch	True-flat PCAP touch with multi-touch support

I/O & Expansion

Serial Port	4, DB9 x 4 [5V support on all COM ports]
Parallel Port	1, through service window
Standard USB Port	8, USB 3.0 x 2 + USB 2.0 x 6
PoweredUSB Port	Optional 24V x 1 + 12V x 3 via GEN 8E base
LAN Port	10/100/1000 Mb x 2
Display Port	VGA x 1, 12V support for Posiflex monitors
CR Port	1, control 2 CR via optional Y-cable, supporting 24V cash drawer
PS/2 Port	1, through service window
UPS Port	Yes, battery optional
Audio	Internal 2W speaker x 1
Expansion Slot	Mini-PCIe slot x 1

Physical Dimension

Dimensions (W x D x H in mm)	404 x 251 x 355
Weight (N. W. in kg)	7.2

Environmental

Operating Condition	0°C - 40°C, 20%RH - 90%RH
Storage Condition	-20°C - 70°C, 10%RH - 90%RH

Built-in Options

WiFi	M.2 WiFi/BT module
------	--------------------

Attachment Options

POS Monitor	Non-touch TFT LCD: 7"/9.7"/12.1"/14"/15"; PCAP touch TFT LCD: 9.7"/14"/15"; Resistive touch TFT LCD: 15"
Line Display	2 x 20 rear-mount VFD/LCD customer line display; 7" color LCD graphical customer line display
Attachment	MSR; iButton; Rotatable 2D Scanner; RFID; Fingerprint Sensor; Keypad

*Designed and Manufactured in Taiwan by Posiflex Technology, Inc.

*The product information and specifications are subject to change without prior notice.

*Please refer to the website for more attachment options.

POSIFLEX

Authorized Distributor / Reseller

Certifications



EN20240314V1

CDG | Computer Peripheral
and Supplies Ltd.

Computer Peripheral and Supplies Ltd.

244 Soi Pattanakam 53, Pattanakam, Suanluang, Bangkok 10250 Thailand

Facebook: facebook.com/cps.co.th

Tel: 02-7224040 Ext.9

Email: sales.dept@cps.co.th

Website: www.cps.co.th

Other: CPS

Other:

Tel: (66) 0-2322-9535

Fax: (66) 0-2322-7990

scan
here
contact us
Need more information

