


WHY ICONN LED POSTER IS BEST?




- We provide **FRAMELESS DESIGN**, supporting BIG SCREEN with 100% front installation and servicing.




- **ICONN** offer 0°, 5° & 10° standing degrees.

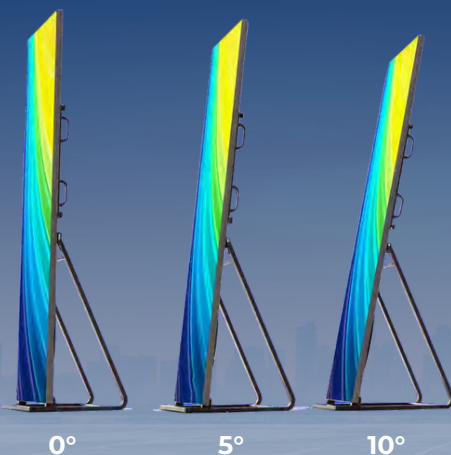

- **All-aluminum body**, 18kg lighter than competitors. Anodize Painting looks higher class than common powder Painting

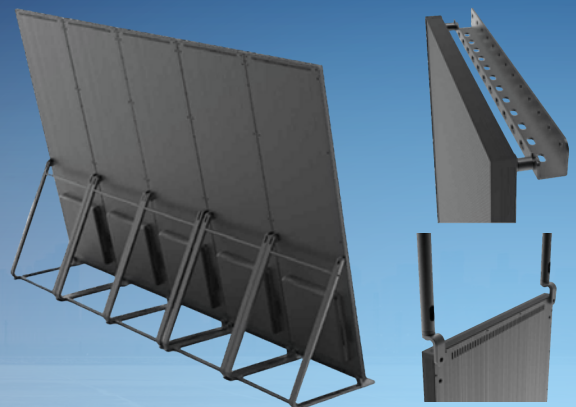

➤ **Standard Width 650mm and 960mm available**

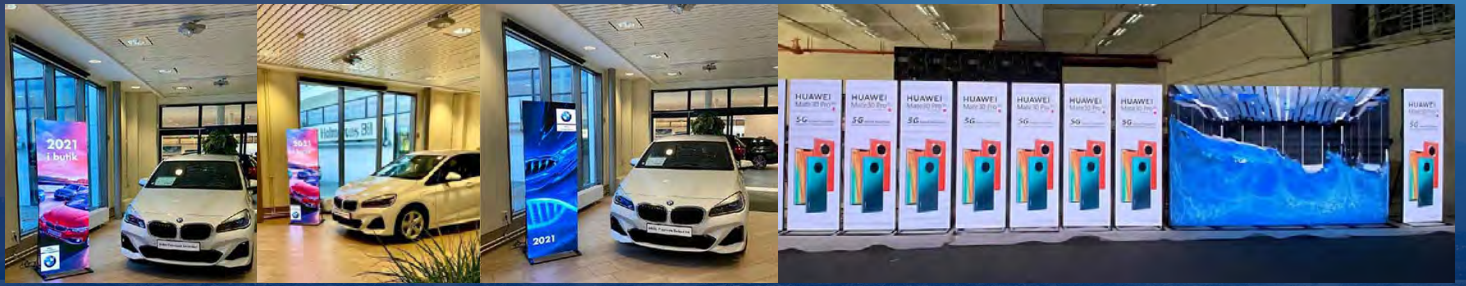

➤ **Use handlebar**, tilt 15 degree and move with wheels design Package with flight case.




➤ **Standing, Wall mounting, Hanging accessories are Professional**



➤ **Cellphone Playback**

- User-friendly interface
- Dual WiFi
- Adaptive display according to screen size
- Each page can be set for timeslot or cycle
- Intelligent brightness adjustment (automatic and timed)




App : ViPlex




SCAN the QR code to download and ViPlex

➤ **GOB design** optional, Anti-water, Anti-morie effect.

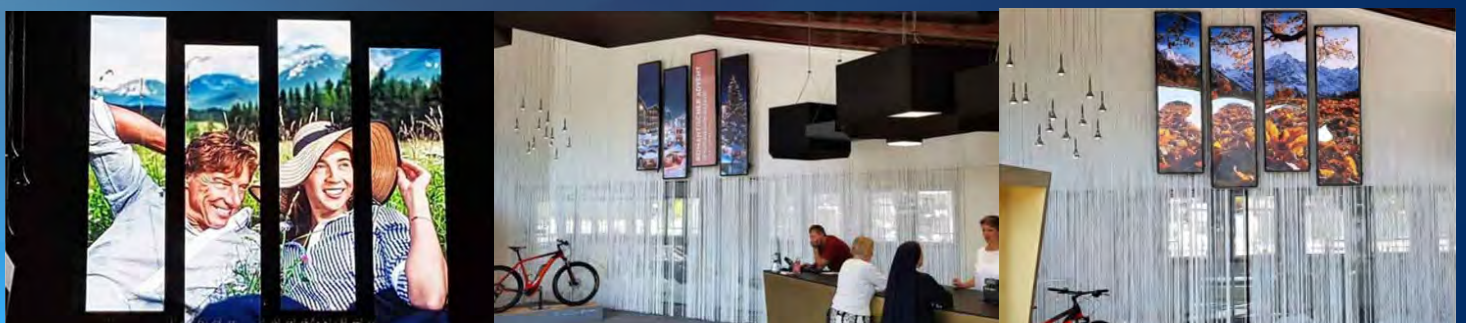


- **Custom design poster,**
ICONN LED posters are provided
Size:650*1930mm and 660*2020mm.

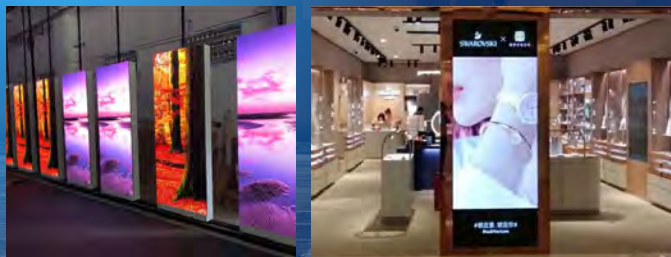

- **Plug & Play**
No external controller needed,
the content can be played once power on



- **Use handlebar,** tilt 15 degree and move
with wheels design Package with flight case.

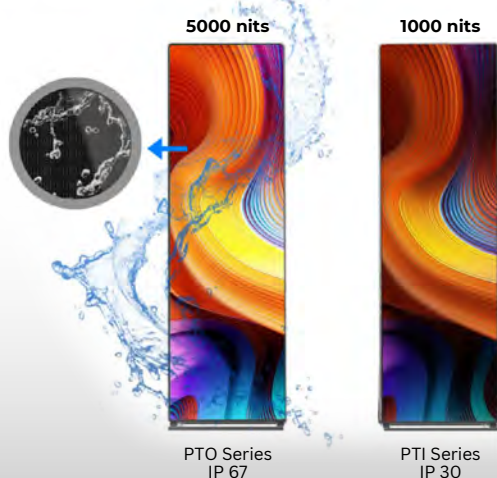

- **Standing,** Wall mounting, Hanging
accessories are Professional



➤ Technical Parameters.

Model No.	PTI1.5	PTI1.8	PTI2.0	PTI2.5	PTI3.0	PTO2.5	PTO3.0	PTO4.0
Display Size	640 x 1920mm					640 x 1920mm		
Overall Size	650mm(W) x 1930mm (H) x 100mm (D)					660mm(W) x 2020mm (H) x 100mm (D)		
Pixel Pitch	1.53mm	1.86mm	2mm	2.5mm	3.076mm	2.5mm	3.076mm	4.0mm
Pixel Density(dots/m2)	422,500	288,906	250,000	160,000	105,625	160,000	105,625	62,500
LED Encapsulation	SMD1010	SMD1515	SMD1515	SMD2121	SMD2121	SMD1415	SMD1415	SMD1921
Scan Rate	1/57 scan	1/48 scan	1/40 scan	1/32 scan	1/26 scan	1/16 scan	1/13 scan	1/10 scan
Module Size	320mm x 160mm							
Module Resolution	209x104	172x86	160x80	128x64	104x52	128x64	104x52	80x40
Screen Resolution	416x1248	344x1032	320x960	256x768	208x624	256x768	208x624	160x480
Brightness (cd/m2)	500 - 600	600 - 650	600 - 650	700 - 800	700 - 800	≥5,000	≥5,000	≥5,500
Max./Ave.Power Consumption (W/m2)	500 / 180					1200 / 450		
Weight	32kg / 45kg					45kg Aluminum		
Degree of Protection	IP30					IP65		
Service	Front Service					Back Service		
Horizontal / Vertical Viewing Angle (°)	160 / 110							
Refresh Rate (Hz)	≥ 3840Hz							
Power Supply	AC120 / 240V (50Hz) (optional)							
Control System	Novastar T Series							

