

DATA SHEET

ROOM SOLUTION: RALLY BAR MINI + TAP IP

Logitech Rally Bar Mini features a 4K-capable camera with motorized pan and tilt, three room-filling speakers, and a sensitive microphone array, all in a sleek enclosure with integrated cable management. Available Wall and TV Mounts offer versatile installation options for rooms and mobile carts.

With a 10.1" touch display, Logitech Tap IP delivers an easy user experience that's always ready for the next meeting.

Set up your room for leading video conferencing platforms, including Zoom Rooms, RingCentral, Microsoft Teams on Android, and others*.

ALL-IN-ONE APPLIANCE SOLUTION FOR SMALL MEETING OR HUDDLE ROOMS

Add video conferencing to any small meeting or huddle room with this universal video conferencing appliance kit featuring the all-in-one Rally Bar Mini and the 10.1" Tap IP touch controller. Leverage the built-in compute to run video conferencing applications directly on the device.

Meetings start with just one touch with Tap IP, a network-connected touch controller for Logitech room solutions.

Take advantage of its single Power over Ethernet (PoE) connection and variety of mounting options to install the touch controller anywhere in the room.

Prevent accidental disconnections thanks to built-in cable retention and strain relief, and be confident that each room stays ready for the next video meeting.

PRODUCT FEATURES



PREMIER ALL-IN-ONE VIDEO BAR FOR SMALL AND HUDDLE ROOMS

Simplicity meets versatility with Rally Bar Mini, Logitech's most advanced all-in-one video bar for small rooms and huddle spaces. A 4K-capable motorized pan and tilt lens provides expansive 163° horizontal x 110° vertical room coverage for comfortable framing, even when people sit close to the camera

CLEAN AND SECURE CABLING

Route cables from above or below: thoughtful cable management hides cable clutter and keeps connections tight. This minimizes visible cabling, prevents downtime due to accidental disconnections, and supports mounting positions above and below the display.

SOUNDS AWESOME


High-performance drivers, adaptive beamforming mics, and a patented anti-vibration enclosure combine rich sound with exquisite sensitivity up to 15 feet (4.5 meters). Add up to two additional mic pods for even greater coverage.

START MEETINGS WITH A TAP

Meetings start with just one touch with Tap IP, a network-connected touch controller that's easy to use and simple to set up.

MANAGEMENT AND INSIGHTS

Monitor, manage, and get business insights into how your rooms are being used with Logitech Sync.

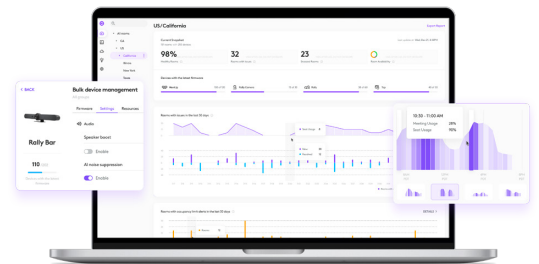

ACCESSORIES & TECH SPECS

RECOMMENDED ACCESSORIES



Tap Riser Mount

Elevated table mount with swivel and cable management



Tap Wall Mount

Space-saving wall mount with cable management



Tap Table Mount

Swiveling table mount with cable management



Tap Scheduler

Purpose-built scheduling panel for meeting rooms



Scribe

Effortlessly share whiteboards into video meetings with Logitech Scribe, an AI-powered whiteboard camera



Swytch

Connect a laptop to a room system's AV equipment for use with any video meeting or webinar.



Rally Mic Pod

Modular microphones with RightSound™ for Rally, Rally Bar, and Rally Bar Mini



Rally Mic Pod Mount

Anchors Rally Mic Pod to a table or ceiling, with cable management for a clean installation.



Rally Mic Pod Hub

Customize microphone placement for most any conference table configuration



Rally Mic Pod Extension Cable

10 meter extension cable.



TV Mount for Video Bars

Attach Rally Bar, Rally Bar Mini, or Rally Camera to almost any display with VESA mounting points.



Wall Mount for Video Bars

VESA-compatible mounting kit for Rally Bar and Rally Bar Mini.

TECH SPECS

TAP IP - GENERAL

Touch Screen: 257 mm (10.1 in) diagonal screen with 14° display angle
 Resolution: 1280 x 800
 Cabling: Power over Ethernet (PoE) cable (not included), IEEE 802.3af Type 1, Class 3 device
 Cable Management: Internal cable retention and strain relief system
 Ethernet: 10/100mbps
 Wi-Fi: 802.11a/b/g/n/ac
 Device Management: Logitech Sync
 Color: Graphite
 Mounting: 100 mm x 100 mm VESA FDMI
 Dimensions (H x W x D): 58 mm (2.3 in) x 244 mm (9.6 in) x 179 mm (7.0 in)

RALLY BAR MINI - GENERAL

Built-in Components: 6 beamforming microphones, motorized pan and tilt camera with 4x digital zoom, 3 speakers, AI Viewfinder, cable management & retention system, table stand, Logitech CollabOS platform
 Enclosure: All-in-one enclosure with integrated table stand and patented speaker suspension system
 Device Management: Logitech Sync
 Displays Supported: 2
 Display Resolution: Up to 4k

RIGHTSENSE TECHNOLOGIES

RightLight: Renders natural skin tones for each participant.
 RightSight: Maintains persistent room awareness and detects human figures to auto-frame participants.
 RightSound: Distinguishes speech from other sounds to auto-level voices while suppressing background noise and echo.

RALLY BAR MINI - INTERFACES

HDMI Out: 2
 HDMI In: 1
 USB: 3x Type A, 1x Type C
 Network: 10/100/1G Ethernet
 WiFi: 802.11a/b/g/n/ac (MIMO)
 Accessory Audio Input: Yes (for optional Rally Mic Pod, Rally Mic Pod Hub, and Rally Mic Pod Extension Cable)
 Remote Control: Bluetooth® Low Energy

PRODUCT SPECS & LINKS

RALLY BAR MINI - CAMERA	RALLY BAR MINI - MICROPHONES	RALLY BAR MINI - DIMENSIONS	
<p>Resolution: 4K, 1440p, 1080p, 900p, 720p, and SD at 30fps</p> <p>Pan: Motorized ±25°</p> <p>Tilt: Motorized ±15°</p> <p>Zoom: 4X HD digital zoom</p> <p>Diagonal Field of View: 120°</p> <p>Horizontal Field of View: 113°</p> <p>Vertical Field of View: 80.7°</p> <p>Total Room Coverage: 163° Horizontal x 110° Vertical</p>	<p>Frequency Response: 90Hz–16kHz</p> <p>Sensitivity: >-36dBFS +/-1dB @ 1Pa</p> <p>Microphone Data Rate Output: 48 kHz</p> <p>Pickup Range: 4.5m (15 ft)</p> <p>Beamforming Elements: Six omnidirectional digital MEMS microphones forming five adaptive acoustic broadside beams</p> <p>Audio Processing: AEC (Acoustic Echo Cancellation), VAD (Voice Activity Detector)</p> <p>Noise Suppression: AI filter</p> <p>Add-on Mics: Supports up to 2 additional Rally Mic Pods</p>	<p>Height: 91.4 mm (3.6 in)</p> <p>Width: 719 mm (2.31 ft)</p> <p>Depth: 101 mm (3.98 in)</p> <p>Lens Depth: 18.5 mm (0.73 in)</p> <p>Weight: 4.03 kgs (8.88 lbs)</p>	
		KIT COMPONENTS	
		<p>Logitech Rally Bar Mini</p> <p>Logitech Tap IP</p>	
RALLY BAR MINI - SPEAKERS	RALLY BAR MINI - SECURITY	PACKAGE CONTENTS	
<p>Woofer: 1x 70 mm (2.7 in)</p> <p>Mid-range: 2x 38 mm (1.5 in)</p> <p>Output: 90dB SPL @1W, 99dB SPL @8.0W, both +/-2dB at ½ meter</p> <p>Sensitivity: 86+/-2dB SPL at 1W, ½ meter</p> <p>THD: 1kHz < 2%</p> <p>Speaker sampling rate: 48 kHz</p>	<p>Full Disk Encryption: AES-128</p> <p>Data Encryption: Symmetric Keys, PKI</p> <p>Device Identity: Protected by device attestation</p> <p>Device Access: Authenticated using API</p> <p>Key Protection: Arm TrustZone, RPMP</p>	<p>Rally Bar Mini</p> <p>Logitech Rally Bar Mini video bar</p> <p>Power supply</p> <p>Cables</p> <p>Lens caps</p> <p>Remote control</p> <p>User documentation</p>	<p>Tap IP</p> <p>Logitech Tap IP touch controller</p> <p>VESA mounting screws (4)</p> <p>Microfiber Cloth</p> <p>Documentation</p>
RALLY BAR MINI - POWER & CABLES	*CERTIFICATIONS & COMPATIBILITY	WARRANTY	
<p>Power Supply: Auto-sensing</p> <p>Operating voltage/power: 100-240V, 19V, 4.74A</p> <p>Power Supply Dimensions: 127 mm x 51 mm x 30 mm</p> <p>DC Cable: 1.5m (4.9 ft)</p> <p>AC Cable: 1m (3.28 ft)</p> <p>HDMI 1.4 cable: 2m (6.5 ft)</p> <p>USB A to USB C 3.0 cable: 2.2m (7.2 ft)</p>	<p>Appliance Mode</p> <p>Supports compatible video conferencing software in appliance mode (no PC required), including Microsoft Teams Rooms, Zoom Rooms, RingCentral Meetings Rooms, and Tencent (for Chinese version only). Contact Logitech or see https://prosupport.logi.com/hc/en-us/articles/1500001344641 for availability information and additional video conferencing platforms.</p> <p>Certifications</p> <p>All components included in the room solution bundle are certified for Zoom Rooms, Microsoft Teams on Android, and RingCentral Meetings Rooms (and Tencent for the China-only version). Contact the manufacturer for additional information on pending and granted certifications.</p>	<p>Standard: 2-year limited hardware warranty included</p> <p>Extended: 1-year and 3-year extended warranties available at the time of hardware purchase. Contact your reseller for availability.</p>	
RALLY BAR MINI - ENVIRONMENTAL		PART NUMBERS	
<p>Operating Temperature: 0 to 40 °C</p> <p>Storage Temperature: -40 to 70 °C</p> <p>Humidity: 10 to 95%</p> <p>BTU/hr: 57 idle, 64 in meeting</p>		<p>US/CA/MX: 991-000385</p> <p>Brazil: 991-000386</p> <p>Argentina/Chile: 991-000387</p> <p>EU/SEA/INDO: 991-000388</p> <p>UK/HK: 991-000389</p> <p>Switzerland: 991-000390</p> <p>AUS/NZ: 991-000391</p> <p>Taiwan: 991-000392</p> <p>India: 991-000393</p> <p>Korea: 991-000396</p> <p>China: 991-000394</p> <p>Japan: 991-000395</p>	



© 2022 Logitech. Logitech, the Logitech logo and other Logitech marks are owned by Logitech and may be registered. All other trademarks are the properties of their respective owners. Logitech assumes no responsibility for any errors that may appear in this publication. Product, pricing and feature information contained herein is subject to change without notice.

Published September 2022

