



SenseFace 3 Series

SIP-Ready Multi-Biometric Access Control Terminal with Video Intercom Capability



Facial
Authentication



RFID



Fingerprint



IP65 dust &
waterproof rating



Video Intercom
(SIP)

Compatible with

ZKBio CVAccess

Compatible with

ZKBio zlink

Compatible with

ZKBio CVSecurity



SenseFace 3A



SenseFace 3B

Introduction

SenseFace 3 Series adopts the latest intelligent engineering facial authentication and in-glass fingerprint technology. It supports fingerprint, facial, card authentication with large capacity and speedy authentication, adopts ultimate antispoofing algorithm for facial authentication against almost all types of fake photos and videos attack, which offering secure biometric authentication.

SenseFace 3 Series is an access control terminal featuring a video intercom function and supports ONVIF protocol. It fully improves the video intercom experience and can be compatible with video intercom indoor unit with SIP protocol (Version 2.0).

Besides, SenseFace 3 Series supports multiple communication protocols. Its firmware has AC push and can convert to TA push and compatible with various AC or TA software. Also, it can change to the BEST protocol to link with ZKBio Zlink (AC module).

Features


- Visible Light Facial Authentication Technology and In-glass Fingerprint Authentication
- Attained IP65 Protection Rating With Dustproof and Waterproof
- Multiple Authentication Methods: Facial / Fingerprint / RFID / Password
- Available RFID Modules: 125 kHz ID Card / 13.56 MHz IC Card
- HD Video Door Phone Via SIP Protocol (Version 2.0). Compatible With ZKTeco SIP Video Intercom Indoor Monitor (VT07-B01 and VT07-B01-W)
- User Data Synchronization: User data can be downloaded/uploaded from one device to another via a USB drive.
- Compatible with wireless doorbell (optional)
- Advanced access control functions (Wiegand input or output shared; RS485 communication; Electric Lock; Door Sensor; Exit Button)

* Download data using the USB driver and make sure to use the FAT32 format.


Specifications

Model	SenseFace 3A	SenseFace 3B
Display	2.8" @ TFT Color Touch LED Screen (240*320)	
Camera	WDR Binocular Camera @ 1MP	
Operation System	Linux	
Hardware	CPU: Dual Core@1GHz RAM: 512MB; ROM: 8GB Speaker: 8ohm @1W Microphone: *1 (Sensitivity: -42 dB/ Omni-directional/ Signal-to-Noise Ratio: 58 dB/ Impedance: 2.2kΩ) Supplement Light: No	
	Fingerprint Sensor: In-Glass Fingerprint (Z-ID)	/
Authentication method	Fingerprint / Face / Card / Password (Virtual Keypad)	Face / Card / Password (Virtual Keypad)
Fingerprint Template Capacity	6,000 (1:N) (Standard)	/
Face Template Capacity	3,000 (1:N) (Standard)	
Card Capacity	6,000 (1:N) (Standard)	
User Capacity	6,000 (1:N) (Standard)	
Transaction Capacity	150,000 (1:N)	
Max. User Password Length	8 Digits	
Biometric Authentication Speed	less than 0.5 sec (Fingerprint) less than 0.35 sec (Facial Authentication)	less than 0.35 sec (Facial Authentication)
Touchless Biometric Authentication Distance	30cm to 200cm (Facial Authentication)	
False Acceptance Rate (FAR) %	FAR ≤ 0.01% (Visible Light Facial Authentication) FAR ≤ 0.0001% (Fingerprint)	FAR ≤ 0.01% (Visible Light Facial Authentication)
False Rejection Rate (FRR) %	FRR ≤ 0.02% (Visible Light Facial Authentication) FRR ≤ 0.01% (Fingerprint)	FRR ≤ 0.02% (Visible Light Facial Authentication)
Biometric Algorithm	ZKFace V4.0 ZKFingerprint V13.0 (Standard) / V10.0 (Optional)	ZKFace V4.0
Card Type	ID Card@125 kHz (Standard) IC Card@13.56 MHz (Optional)	
Communication	TCP/IP*1 Wi-Fi (IEEE802.11b/g/n/ax) @ 2.4 GHz Wiegand (Input or Output)*1 RS485: ZKTeco RS485*1 USB: Type A (USB Drive Only)*1 Aux Inputs *1, Electric Lock*1, Door Sensor*1, Exit Button*1, 12V Output*1	
Standard Functions	ADMS, DST, Photo Capture, Event Photo Capture, Up to 14-digit User ID, Access Levels, Groups, Holidays, Anti-Passback, Record Query, Schedule Bell, Tamper Switch Alarm, Automatic Status Switch, Multiple AuthenticationMethods, SIP Client (Version 2.0), ONVIF (Compatible with Profile S, Profile T, Profile G, Profile C, Profile Q & Profile A), AC Push and TA Push Protocol Switch Switch, HTTPs / SSH Backend Access, T9 Keyboard (Input)	
Optional Functions	IC Card, Wireless Doorbell	
Access Control Interface	RS485 (RS485 Card Reader / Biometric Reader)	
Power Supply	DC 12V 3A	
Operating Temperature	-5°C to 45°C	
Operating Humidity	10% to 90% RH (Non-condensing)	
Dimensions	166 mm * 63 mm * 25 mm (L*W*H)	
Net Weight	0.185 Kg	
Supported Software	Software: ZKBio CVAccess / ZKBioTime / ZKBioCV Security Mobile App.: ZKBio Zlink / ZSmart Cloud Service: ZKBio Zlink	
Installation	Wall-mount (Compatible with Asian Gang Box / Single Gang Box)	
Ingress Protection Rating	IP65 (waterproof and dustproof)	
Certifications	ISO14001, ISO9001,CE, FCC, RoHS	

Configuration

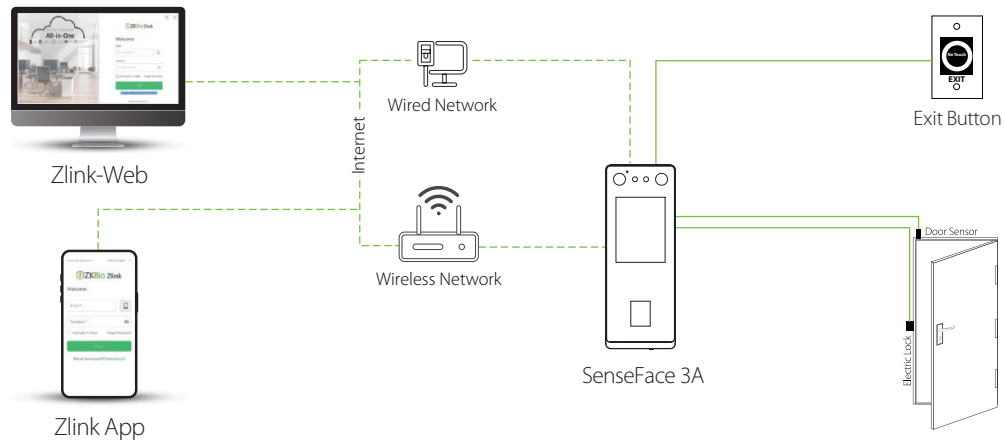


BEST Protocol

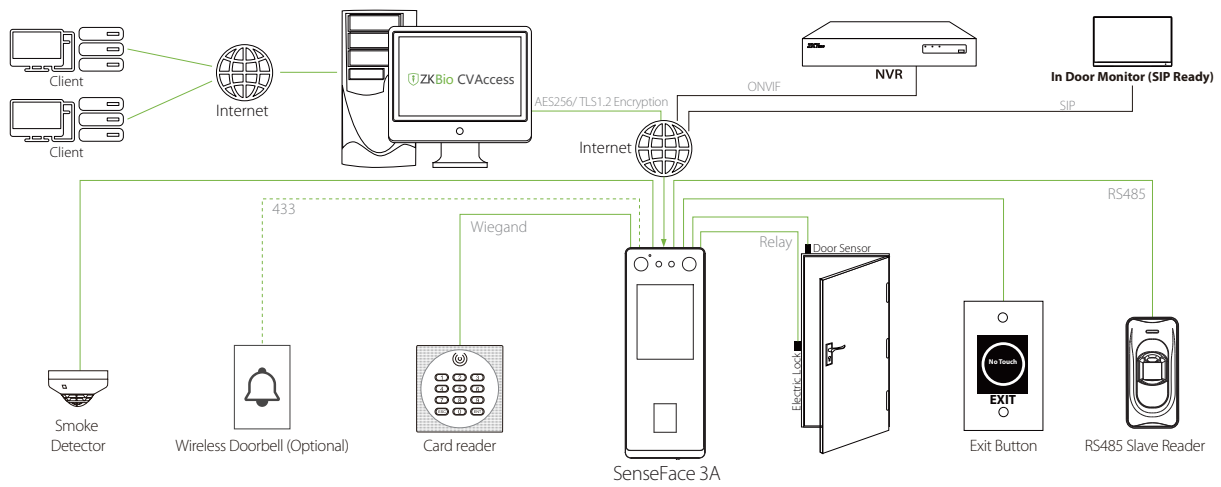

PUSH Protocol

Dimensions (mm)

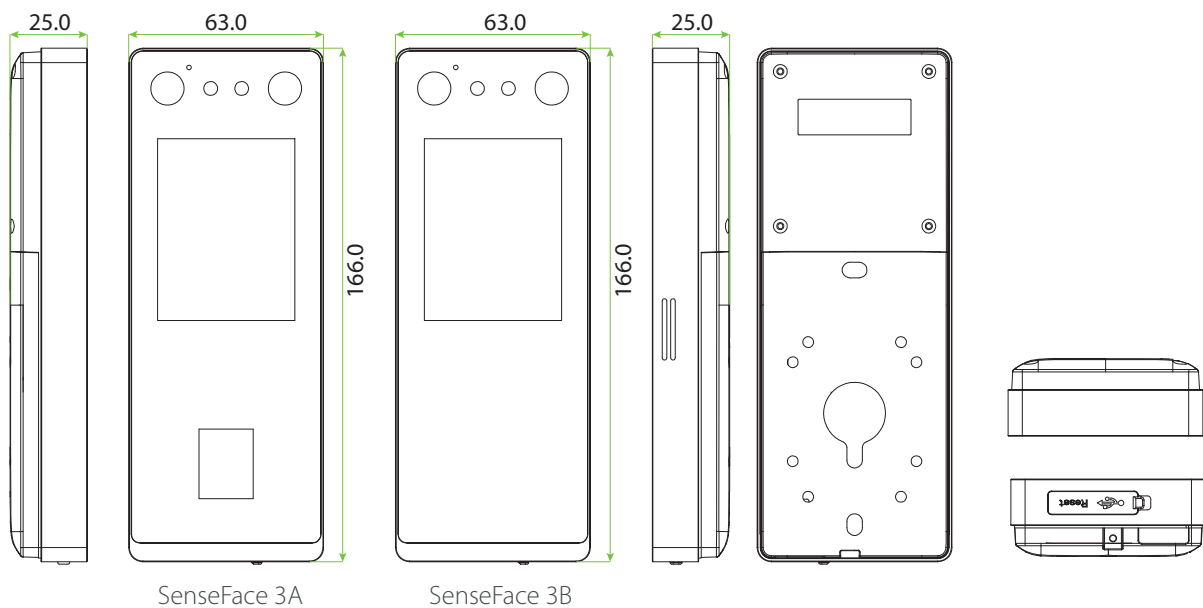

Copyright © 2024 ZKTECO CO., LTD. All rights reserved. V1.0 04/16/2024

CDG | Computer Peripheral and Supplies Ltd.

Computer Peripheral and Supplies Ltd.
244 Soi Phatthanakan 53, Phatthanakan, Suanluang,
Bangkok 10250 Thailand

Tel : (66) 0-2322-9535, 0-2722-4040, Fax : (66) 0-2322-7990
Email : sales.dept@cps.co.th, www.cps.co.th
www.facebook.com/cps.co.th, LINE ID : @cps.co.th

