C808 Twin Spot LED Emergency Light



- Non-maintained operation mode
- On-Off switch to emergency operation
- Test button for lamp and battery testing
- SMD LEDs lamp
- Rechargeable $LiFePO_4$ batteries pack
- 4 hours emergency duration
- 9 hours recharging time
- Charge and lamp healthy indicators
- Overload and short circuit protection
- Over charge and over discharge protection
- Polycarbonate housing and lamp heads
- IP20 enclosure rating
- Comply with EN60598-2-22 and TIS 1955-2551 standard


SPECIFICATION

Input	: 220 Vac, 50 / 60 Hz
Lamp	: 2 x 7.5 Watt SMD LEDs lamp
Luminous	: 350 - 400 lumens
Battery	: 3.2 V 6,000 mAh (19.2 Wh) Rechargeable $LiFePO_4$ batteries pack
Battery life time	: 5 years
Charging current	: 300 - 400 mA
Discharging current	: 900 - 1500 mA
Duration	: 3 hours
Protection	: Over charge and discharge protection AC fuse for preventing AC short circuit and overload DC fuse for preventing charging short circuit and lamp
Manual test	: Push button
Indicator	: Charging and operating status
Material	: Polycarbonate enclosure and lamp head
Dimension (L x W xH)	: 280 x 95 x 300 mm
Weight	: 1.8 kg
Enclosure rating	: IP20
Mouting	: Wall mounted
Accessory	: Remote control (optional)
Standard	: Comply with EN60598-2-22 and TIS 1955-2551
Warranty	: 2 Years warranty for LED lamp and battery 5 Years warranty for circuit board







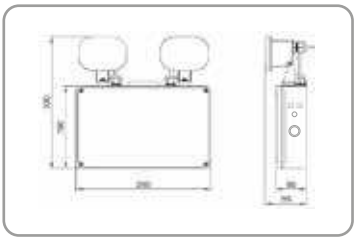

TIS 1955-2551

DENA ENGINEERING CO.,LTD.
185/1 Wongsawang Road, Wongsawang, Bangsue, Bangkok 10800 THAILAND
Tel. 02-587-7780, 02-910-9600 e-mail: dena@dena.co.th www.dena.co.th

Made with Goodnotes