






TRUE UNION BALL VALVE (UPVC , CPVC, PPH)

Features


- Full Port Type
- Pressure Rating 150 Psi
- Less Flow loss and seal hermetically
- Fit Compactly in spaces
- Actuator could be installed with inserted nut
- The standard product without nut inserted
- Standard JIS/ANSI/DIN

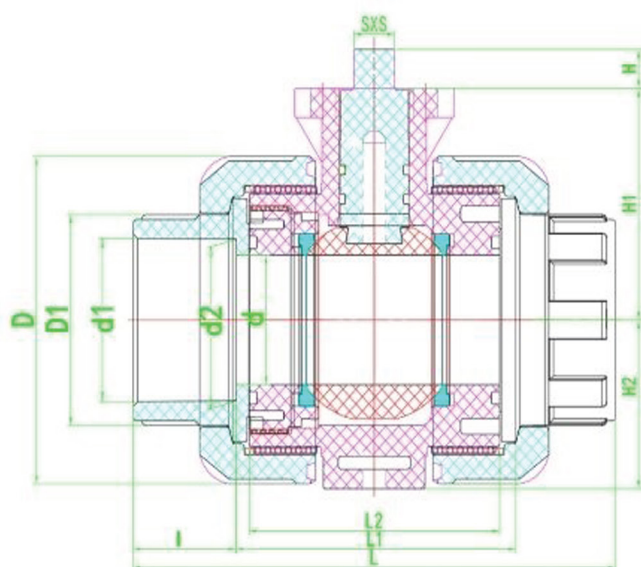


1/2"(DN15)-2"(DN50)



2-1/2"(DN65)-3"(DN80)



2-1/2"(DN65)-4"(DN100)

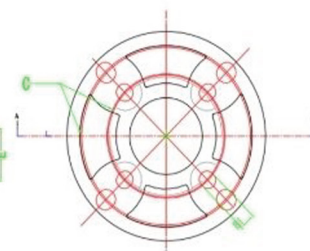

4"(DN100)

Size	d	L	I	d1		d2	
				UPVC/CPVC	PPH	UPVC/CPVC	PPH
DN15	15	112	23	20.25	19.2	20.05	19
DN20	20	120	26	25.25	24.2	25.05	23.8
DN25	25	136	29	32.25	31.1	32.05	30.7
DN32	32	150.5	32.5	40.25	39	40.05	38.6
DN40	40	168	35.5	50.25	48.9	50.05	48.6
DN50	50	180	38.5	63.25	61.9	63.05	61.4
DN65	63	235	44.5	75.25	73.6	75.05	72.3
DN80	75	265	51	90.35	88.3	90.05	86.9
DN100	90	304	61.5	110.3	108	110	106.4

Size	D	D1	L1	L2	H	H1	H2	SXS	C	B1	B2	E	F	Operating Torque(N.M)
DN15	56	32	66	57	8.2	44.3	28.7	9X9	36	M5	6	/	31	2
DN20	65	37	68	59	8.2	53.3	32.7	9X9	36	M5	6	/	35	2.5
DN25	76	45.5	76	68	9.2	60.6	38.75	9X9	36	M5	6	/	42	3
DN32	87	55.5	85	76	11	61.5	44.25	11X11	50	M6	8	/	56	3.5
DN40	101	62	95.5	86.5	12	71.5	51.5	11X11	50	M6	8	/	58	4.5
DN50	121	79	103	92	12	82.5	62	11X11	50	M6	8	/	70	5.5
DN65	150	94.2	146	134	15	94.5	79.5	14X14	70	M8	10	30	84	7.5
DN80	169.5	110	163	148	15	105	90	14X14	70	M8	10	32	90	8.5
DN100	190	132	181	157	15	117.5	96	14X14	70/100	M8/M10	10	40	100	12