




SPRING FOOT VALVE

Features

- Full Port Type
- Pressure Rating 150 Psi
- Less Flow loss and seal hermetically
- Fit Compactly in spaces
- Actuator could be installed with inserted nut
- The standard product without nut inserted
- Standard JIS/ANSI/DIN



SPECIFICATIONS:

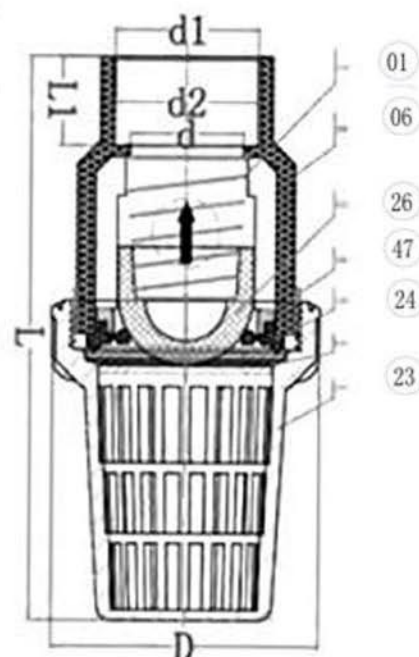

Specification of Material

ITEM	PART	MATERIAL	QTY
01	BODY	PVC / CPVC	1
06	BALL	SS 316	1
23	BONNET	PVC / CPVC	1
24	PAD	PVC / CPVC	1
26	BUCKLE	PVC / CPVC	1
47	SEAL	EPDM / VITON	1

Dimensions

Unit: mm

SIZE	d	d1				d2				D	L	L1
		ANSI	DIN	JIS	CNS	ANSI	DIN	JIS	CNS			
1/2"(15)	15	21.54	20.30	22.40	22.40	21.23	20.10	21.73	21.90	54.00	109.00	22.30
3/4"(20)	20	26.87	25.30	26.45	26.40	26.57	25.10	25.69	25.90	63.00	137.50	25.50
1"(25)	25	33.65	32.30	32.55	34.50	33.27	32.10	31.70	33.90	73.50	153.00	28.60
1 1/4"(32)	32	42.42	40.30	38.60	42.50	42.04	40.10	37.65	41.90	84.50	181.50	32.00
1 1/2"(40)	40	48.56	50.30	48.70	48.60	48.11	50.10	47.74	47.90	98.00	204.00	35.00
2"(50)	50	60.63	63.30	60.80	60.60	60.17	63.10	59.78	59.90	119.00	239.00	38.00
2 1/2"(65)	65	73.38	75.30	76.60	76.70	72.85	75.10	75.68	75.90	165.00	235.50	47.00
3"(80)	75	89.31	90.44	89.60	89.70	88.70	89.96	88.55	88.90	172.00	256.00	53.00
4"(100)	95	114.76	110.52	114.70	115.00	114.10	109.98	113.60	113.80	205.00	321.50	62.00