


CP-UNC-DS25ZPL3-M**2MP Full HD IR Network Dome Camera - 30Mtr.****Main Features**

- 1/2.7" 2MP PS CMOS Image Sensor
- 25/30fps@1080P(1920×1080)
- H.265+ / H.265 dual-stream encoding
- DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 2.8~12mm Motorized lens
- IR Range of 30 Mtrs, IP67, Micro SD Card, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro

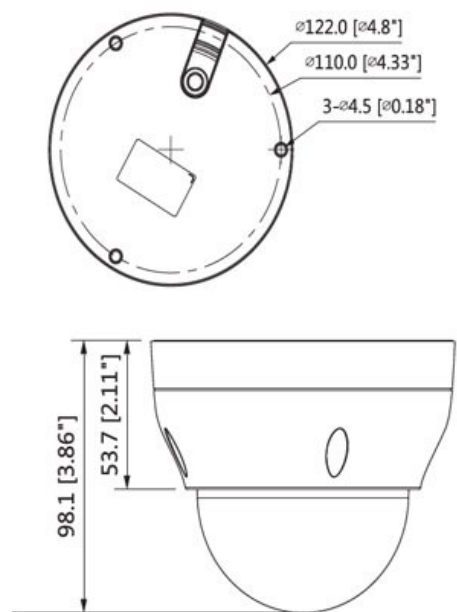

CP- UNC-DS25ZPL3-M**2MP Full HD IR Network Dome Camera - 30Mtr.****Feature**

Image Sensor
Effective Pixels
Minimum Illumination
Shutter Speed
White Balance
Gain Control (AGC)
Lens
Video Compression
Angle of View
Back Light Compensation
S/N Ratio
Resolution
Frame Rate
Digital Zoom
Motion detection
Privacy Mask
ICR
ROI
Bit Rate
Protocol
Ethernet
Event Trigger
User Account
IR
Smart Phone
Micro SD
Operating Temperature
Power Source

Specification

1/2.7" 2MP PS CMOS Image Sensor
1920(H)x1080(V)
0.05Lux/F1.8(Color,1/3s,30IRE) 0.3Lux/F1.8(Color,1/30s,30IRE) 0Lux/F1.8(IR on)
Auto/Manual, 1/3~1/100000s
Auto/Natural/Street Lamp/Outdoor/Manual
Auto/Manual
2.8mm~12mm Motorized Lens
H.265+/H.265/H.264+/H.264/H.264B/MJPEG (Sub Stream)
H:105°~33°, V:56°~18°
BLC/ HLC/ DWDR
More than 50dB
1080P(1920×1080)/1.3M(1280×960)/ 720P(1280×720)/D1(704×576/704×480)/VGA
(640×480)/ CIF(352×288/352×240)
Main Stream: 1080P (1 ~ 25/30fps) Sub Stream: D1(1 ~ 25/30fps)
16x
Off / On (4 Zone, Rectangle)
Off / On (4 Area, Rectangle)
Auto (ICR)/Color/B/W
Off / On (4 Zone)
H.264: 32K~6144K, H.265: 12K~ 6144K
HTTP; HTTPS; TCP; ARP; RTSP; RTP; RTCP; UDP; SMTP; FTP; DHCP; DNS; DDNS; PPPoE; IPV4/V6;
QoS; UPnP; NTP; Bonjour; IEEE 802.1X; Multicast; ICMP; IGMP; T LS; SSH; ONVIF Profile S&G,
API
RJ-45 (10/100Base-T)
Motion detection, Video tampering , Network disconnection , Scene change, IP address
conflict, Illegal Access, Storage anomaly
20 Users
IR Range of 30 Mtr.
iPhone, iPad, Android Phone
Micro SD Card 128GB
-30°C~+60°C , Less than 95%RH
DC12V, PoE (802.3af)



CP- UNC-DS25ZPL3-M

2MP Full HD IR Network Dome Camera - 30Mtr.



Feature

Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

DC12V: 1.8W, 5.5W(IR On) , PoE: 2.2W, 6.5W(IR On)
IP67
Φ122mm x 98.1mm
0.381Kg



**Product casing and specifications are subject to change without prior notice*