



# RS36

series



# Superior Data Capture and Visibility Boosts All-day Workflow Efficiency



CipherLab's RS36, the successor to the RS35, is a durable, enterprise-class touch mobile computer featuring new scan engine options and enhanced functionality. Operating on Android 12 with future support for Android 14, it offers exceptional versatility and simplicity, reducing onboarding time and boosting productivity.

## Reliable Data Access and Communication for Frontline Workers

With advanced scanning capabilities, powerful processing, and an intuitive touchscreen, the RS36 ensures secure, reliable data connections and is built for rugged, off-site use. It also integrates seamlessly with CipherLab's mobile device management software, enabling efficient deployment and management. These features empower mobile workforces to achieve more in less time.



## Flexible Data Capture with Agile Performance

The RS36 supports 1D/2D barcode scanning, HF RFID, and NFC, with both standard and extended range options. It can be integrated with a UHF RFID reader to capture over 900 tags per second at 8+ meters. For short-range needs, the RS36 NUHF RFID reader handles 100 tags per second at up to 3 meters, enhancing inventory and asset tracking efficiency.



## Seamless Connection Inside and Outside Your Facilities

Mobile workers need timely access to information. The RS36 provides seamless Wi-Fi, Bluetooth 5.1, and Wi-Fi 6 for fast, reliable connections. Its 2x2 MU-MIMO tech ensures low latency in crowded environments, while 4G LTE keeps field workers connected to crucial data anywhere.



## Rugged Design Protection and Sunlight Readable Display

The RS36 features a 5.5" screen with 630 nits brightness, supporting gloves or stylus use. Its rugged design withstands 1.5-meter drops (1.8 meters with rubber boot) onto concrete. With IP65/IP68 water and dust resistance, it's reliable in tough environments, including rainy conditions. It also has Corning Gorilla Glass and a wide operating temperature range.



## Fast Capture High-Res Photos With PDAF and Recognize Characters With OCR

The RS36's 16MP PDAF rear camera captures sharp images quickly, even in low light or motion, ideal for proof of delivery and condition checks. The 5MP front camera enables video communication for enhanced service. Its OCR capability allows reading characters like serial numbers and expiration dates, streamlining tasks and reducing typing errors in warehousing and delivery.

## Dependable Performance for Demanding Operations




The RS36's Qualcomm octa-core 2GHz CPU offers exceptional speed, enhanced app performance, and lower battery consumption. It supports smoother applications and web browsing, and is Android Enterprise Recommended (AER) and Google Mobile Services (GMS) verified. With 4GB/64GB memory, it handles data efficiently. The device features 4000 mAh or 6000 mAh batteries and a hot-swap function for seamless battery replacement.

## Maximize Your CipherLab Gear to Make It a Total Solution




ReMoCloud is mobile device management software developed by CipherLab to efficiently manage remote devices over the internet. Administrators can use this to gain visibility into employee devices.



CipherLab's deployment tool provides mobile computer administrators with different options to manage configurations efficiently and according to their needs.



CipherLab's full-featured and enterprise-oriented tools help IT technicians or SI develop mobile device configuration projects for various needs.



These tools enable field workers to work seamlessly and efficiently in a user-friendly Android interface.



# An Enterprise Tool that Maximizes Work Efficiency Indoors and Outdoors



Slim and compact design




Supports Wi-Fi 6, 2x2 MU-MIMO, and Bluetooth 5.1



Easily add UHF RFID reading capability by attaching RS36 onto its UHF RFID reader.



Android 12 operating system, GMS certified




OCR recognizes numbers and characters printed on items.



16MP PDAF rear camera with LED flash



Touch panel welcomes input from stylus and fingers (bare, wet, and gloved)

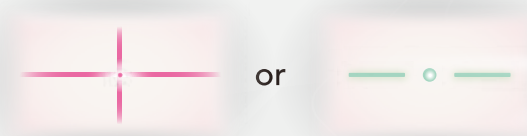

1D/2D barcode data capture. NFC and HF RFID capability.



5.5" touch display provides a larger work surface and increases visibility



Sunlight readable

One-piece battery



Hot-swap function

Allows the device to stay operational during the battery replacement

Quick-release hand strap saves time in battery replacement

# RS36 series



Performance	Operating System	Android 12 (GMS), upgradable to Android 14
	CPU	Qualcomm Octa-core 2GHz
	Memory	64GB UFS Flash / 4GB LPDDR4X RAM, 128GB UFS Flash / 8GB LPDDR4X RAM
	Expansion	Micro SD card slot with SDHC (up to 32GB) and SDXC (up to 2TB) support
	SIM	2 nano SIM/ 1 nano SIM and 1 eSIM (optional)
	Operating Power	Hot-swappable and rechargeable 3.85V, Li-ion 4000mAh , Extended battery: 6000mAh
	Working Hours <sup>1</sup>	12+ hours (standard battery), 18+ hours (extended battery)
	Alert	1 tri-color LED, 1 bi-color LED, vibrator
Interface Supported		6-pin I/O & USB 3.1 Gen 1 Type-C with OTG
Wireless Communication	WWAN	EDGE/GPRS/GSM: 850/900/1800/1900 UMTS/HSPA+: B1/B2/B4/ B5/B6/B8 FDD LTE: B1/B2/B3/B4/B5/B7/B8/B12/B13/ B17/B19/B20/B25/B26/B28/B66 TDD-LTE: B38/39/40/41 Support VoLTE and Worldwide Band
	WLAN	IEEE 802.11 a/b/g/n/ac/d/h/i/r/k/v/w, IEEE 802.11ax (Wi-Fi 6 model only)
	Additional WLAN Features	802.11r (fast roaming), 802.11 v/k (Voice-Enterprise), MU-MIMO 2x2 (Wi-Fi 6 model only)
	WPAN	Bluetooth® Class II, V5.1 dual mode, V2.1 with Enhanced Data Rate (EDR)
	GPS <sup>3</sup>	GPS/A-GPS/GLONASS/Galileo/Beidou
Data Capture	Barcode Scanning	1D/2D imager (Standard range: SE4100/SE4770; Advanced range SE5500)
	RFID Read / Write	HF RFID 13.56 MHz frequency which supports ISO14443A, ISO14443B, ISO15693, and Felica Support NFC (Peer-to-Peer, Card Reader, Card Emulation)
	Camera	Rear :16 megapixels PDAF with LED flash / Front:5 megapixels <sup>2</sup>
Physical Characteristics	Display	5.5" HD+ 720 (W) x 1440 (H), Transmissive IPS LCD, outdoor visibility (630 nit), optically bonded Touch Panel
	Touch Panel	Corning® Gorilla® Cover Glass, Capacitive touch supports stylus, bare or gloved fingertip input multi-touch, allow water rejection and wet finger
	Interactive Sensor Technology	Light sensor, Proximity sensor, Motion sensor (Accelerometer, G-sensor), E-compass (Magnetometer), Gyroscope
	Keypad	1 programmable key, volume up and down keys, left and right trigger keys, power key
	Audio	Speaker (80 dB at 40 cm), microphones with echo and noise cancellation
	Size (LxWxH)	165 x 76.8 x 17.9 mm
	Weight	288g (with 4000mAh battery) / 319g (with 6000mAh battery)
User Environment	Operating Temperature <sup>4</sup>	-20°C to 60°C / -4°F to 140°F
	Storage Temperature	-30°C to 70°C / -22°F to 158°F (without battery)
	Humidity (non-condensed)	Operating 10% to 90% / Storage 5% to 95%
	Impact Resistance	IP65 & IP68 With extended battery: 1.5m multiple drops (36 times), 500 tumbles. With standard battery: 1.5m multiple drops (36 times) & MIL-810H multiple drops (26 times), 1500 tumbles. With rubber boot: 1.8m (6 ft.) multiple drops onto concrete, 6 drops on each side.
	Electrostatic Discharge	± 15 kV air discharge, ± 8 kV contact discharge
	Regularity Compliance	LTE : CE, FCC, IC, NCC, TBL, JRL, BIS, WPC, WEEE, RoHS, REACH, CA65, TSCA, BC, NiCAN, NBTC WI-FI 6 ONLY : SRRC, CCC, BSMI, NCC, CE, FCC, IC, WEEE, RoHS, REACH, CA65, TSCA, BC, NiCAN
Development Support	Android 12.0 SDK, HTML 5 API, Reader API (Java/Xamarin)	
Application Software	ReMoCloud, EnDeCloud, ADC, WMDS, APPLock, Terminal Emulator, BT Printer Mate, Device Health, SIP Controller, Software Trigger, Signature Capture, EZEdit, CipherLab Assistant Service, Ping Tool, Wireless Initiator, IntelliWorker, Reader Config, Button Assignment, HF RFID Config, EZConfig, Enterprise Setting, Barcode To Setting, LogGen, Agility Intelligence, Cloud Message, EZcheck	
Certified Application	ReMoCloud, EnDeCloud, SOTI MobiControl, VMware Workspace ONE, Ivanti Wavelink Velocity	
Accessories	Charging and communication cradle, USB snap-on cable, Hand strap, Rubber boot, Pistol grip, 4-slot battery charger, Multi-slot Terminal charging cradle <sup>2</sup> , UHF RFID reader <sup>2</sup> , Screen protector <sup>2</sup>	
Warranty	1 year standard warranty	

1. Minimum hours under WLAN and 2D scanning per 20 seconds, LCD 50% backlight and speaker on (volume is default) at 25°C, RFID off / Bluetooth® off / IEEE 802.11 a/b/g/n/ac on. The test is based on one broadcasting packet per second.  
 2. Please contact us for availability.  
 3. GPS function is only available for WWAN models.  
 4. Please note: RS36 should not be used in environments with significant temperature fluctuations, such as frequent entry and exit from refrigerators or buffer zones. If used in such conditions, it is recommended to use a specialized cold storage device.

## ACCESSORIES

