

EB75 12V 75Ah

Sealed Lead-Acid (SLA) Deep Cycle Gel Battery



Applications

- EV Golf Cart, Utility Vehicles or NEV
- Scissor Lifts, Aerial Work Platforms
- Floor Sweeper, Scrubbers or Floor Cleaning Machine
- Material Handling
- Renewable Energy

General Features

- DOD 50% more than 1500 life cycles @ 25°C
- Long life and high stability under high temperature environment
- Design for usable at tropical countries
- Rechargeable and maintenance-free
- Gel VRLA (Valved Regulated Lead-Acid) battery

Specifications

BCI Group Size	Model	Voltage	Cell	1 Capacity (Ah) @ 25°C						2 Minutes of Discharge			Internal Resistance	Dimensions (mm)				Weight (kg)
				1 hr rate	2 hr rate	5 hr rate	10 hr rate	20 hr rate	100 hr rate	@25A	@56A	@75A		L	W	H	TH	
24	EB75	12V	6	49	56	65	75	87	96	140	42	36	≤ 6.0mΩ	260	169	211	215	26.2

¹ The amount of amp-hours (Ah) a battery can deliver when discharged at a constant rate a 25°C and maintain a voltage above 1.75V/cell. Capacities are based on peak performance.

² The number of minutes a battery can deliver when discharged at a constant rate at 25°C and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.

Charging Instructions

Recommended Charge Current

- With Temperature Compensation
- Without Temperature Compensation

Charge Voltage (12 Volts)

Bulk Charge

Absorption Charge

Float Charge

Temperature Compensate Factor

Cyclic Application

15.0 A Max.

7.5 - 15.0 A

14.4 - 14.9 V

14.7 V

14.7 V

13.8 V

- 4 mV/°C/Cell

Operating Temperature

Discharge: -15°C~45°C

Charge: -15°C~45°C


Storage: -15°C~45°C

DO NOT charge at temperature corrected voltages above 15 Volts (2.5 Volts/cell).

Use of voltage controlled charger is a requirement for warranty coverage.

For best cycle life, limit discharge to less than 50% of the battery's 20 hour capacity.

Dimensions and Terminal

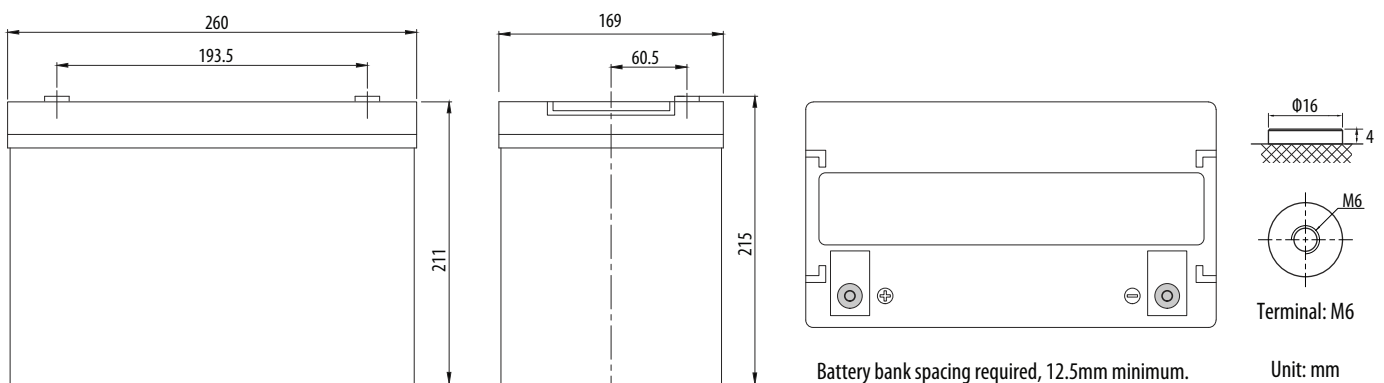





EB75 12V 75Ah

Sealed Lead-Acid (SLA) Deep Cycle Gel Battery



Battery Construction

Positive plate	Negative plate	Container&Cover	Safety valve	Terminal	Seperator	Electrolyte	Pillar seal
Thick high Sn, low Ca grid	Pb-Ca grid	ABS	Si-Rubber	Copper insert M6	PVC/AGM seperator for high pressure cell	Silica Gel	Two layers epoxy resin seal

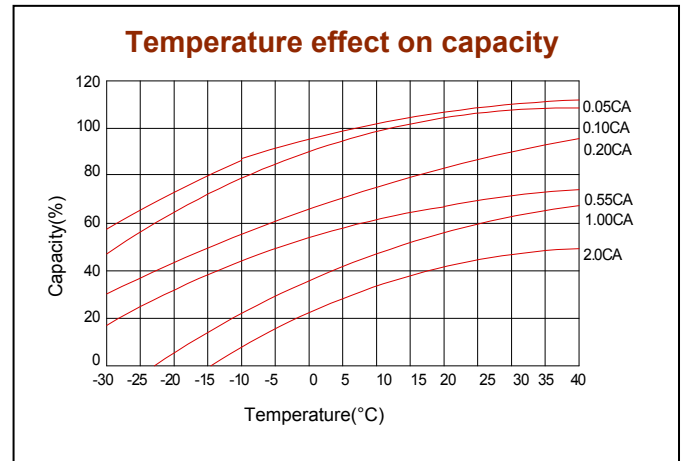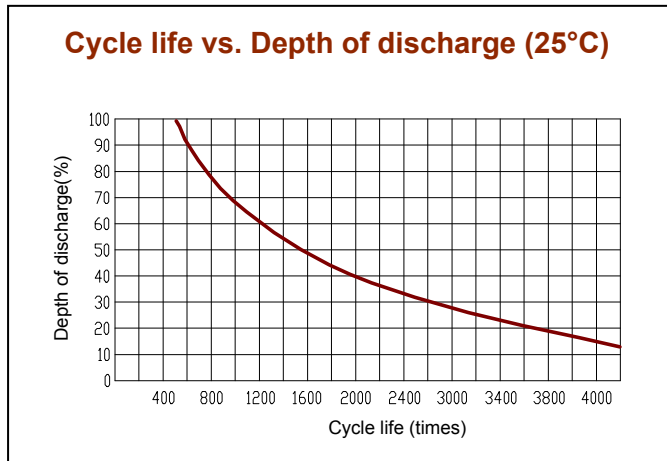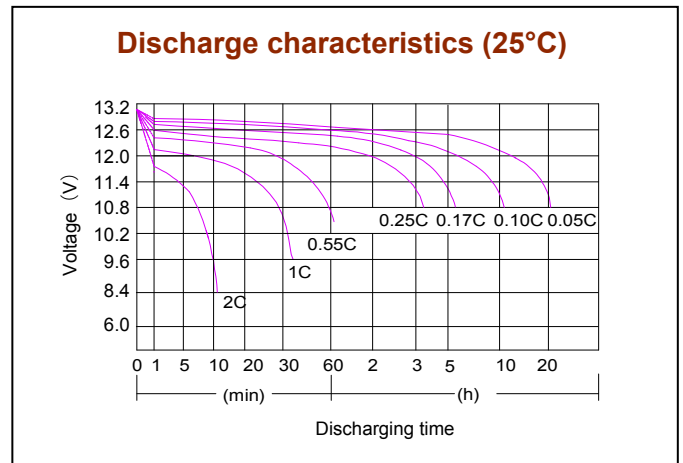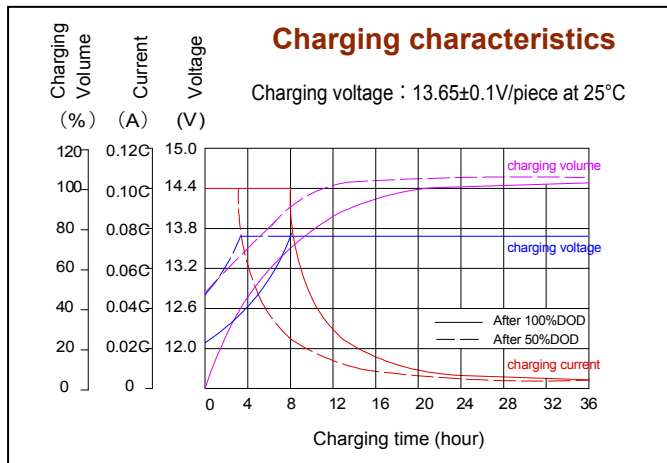

DENA ENGINEERING CO.,LTD.

185/1 Wongsawang Road, Wongsawang, Bangsue, Bangkok 10800 THAILAND

Tel. 02-587-7780, 02-910-9600 e-mail: dena@dena.co.th www.dena.co.th